
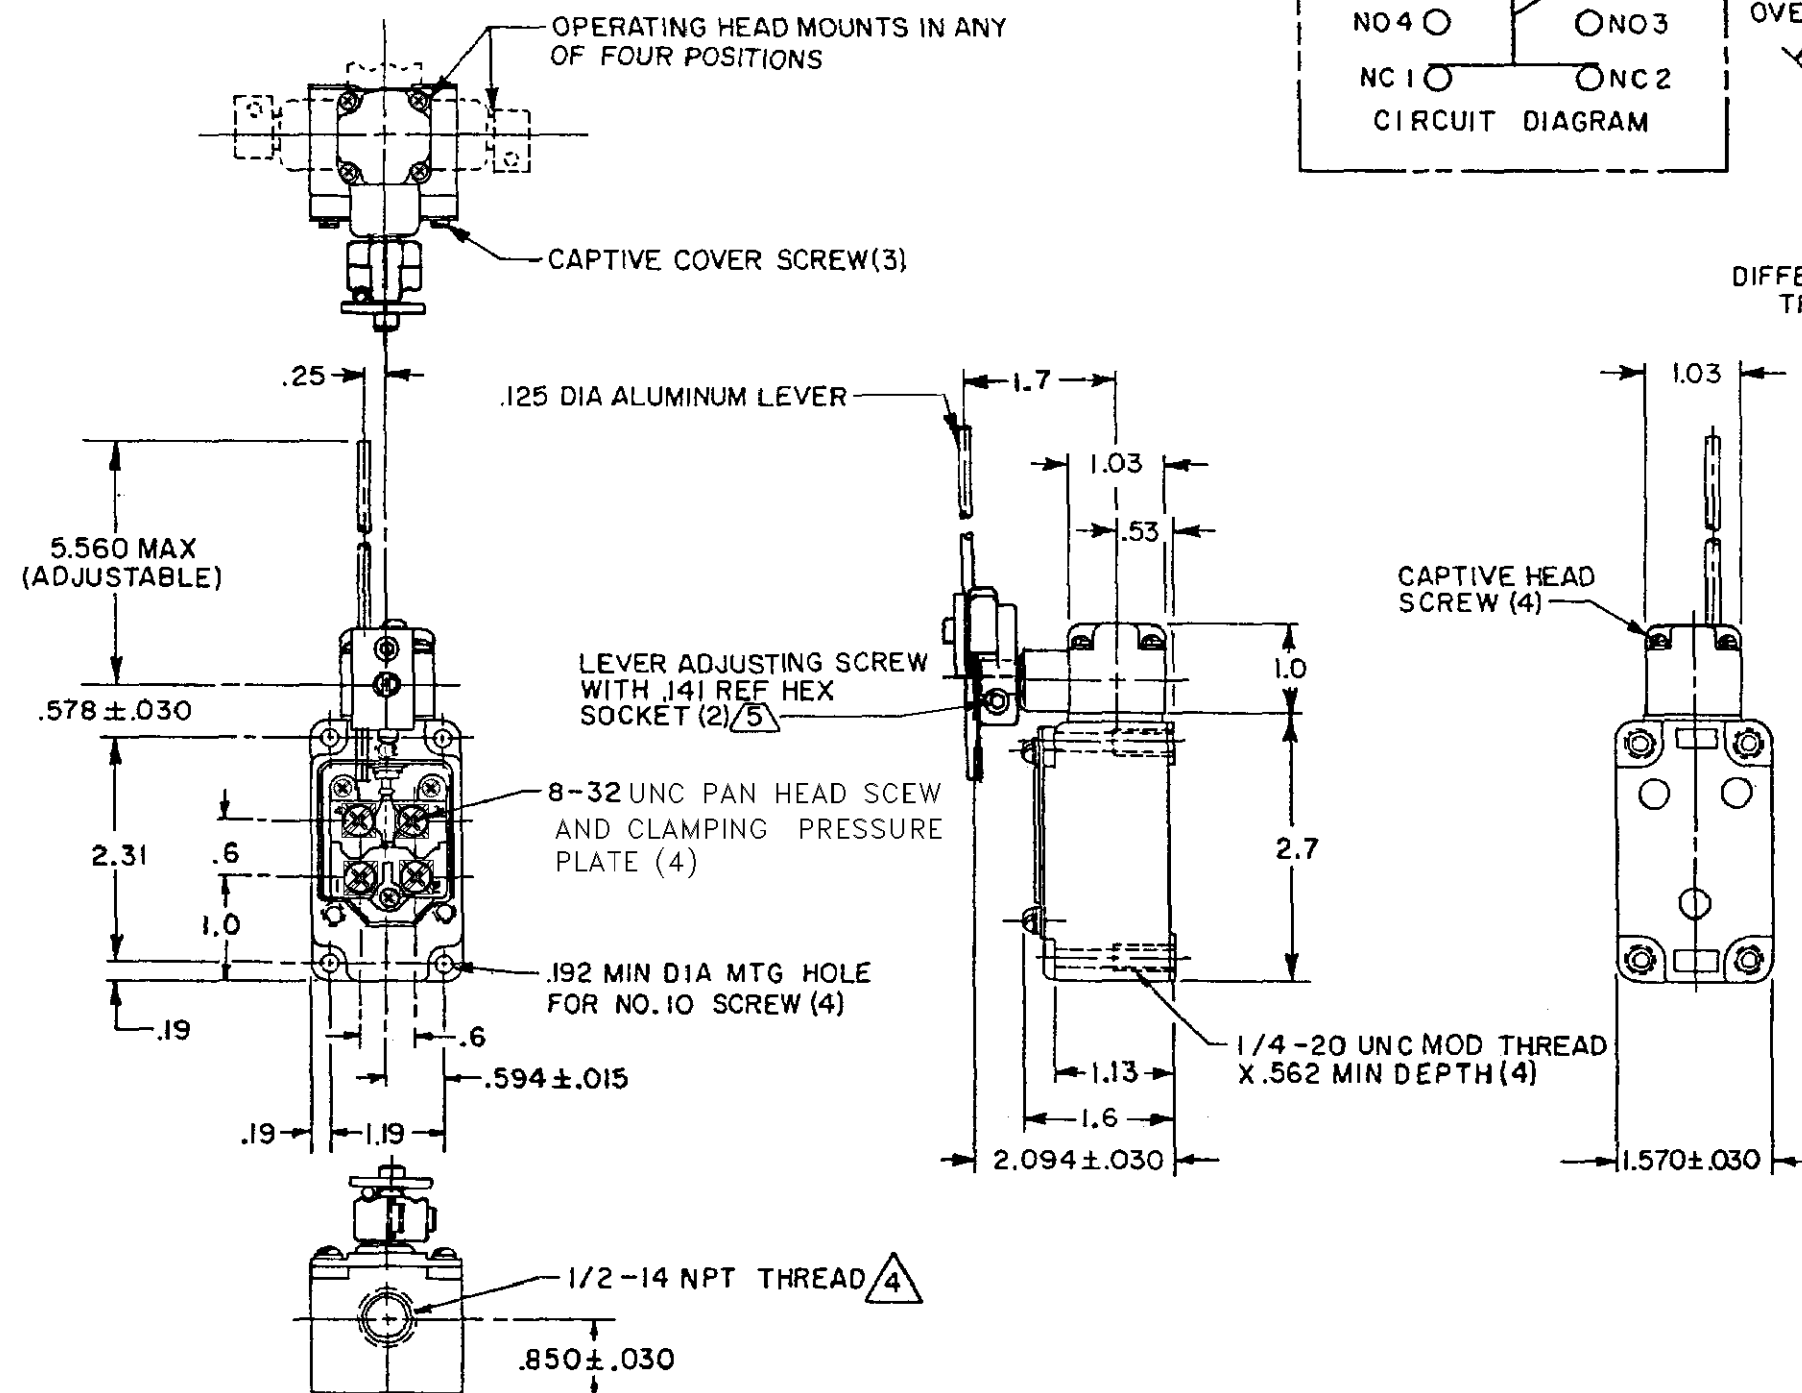
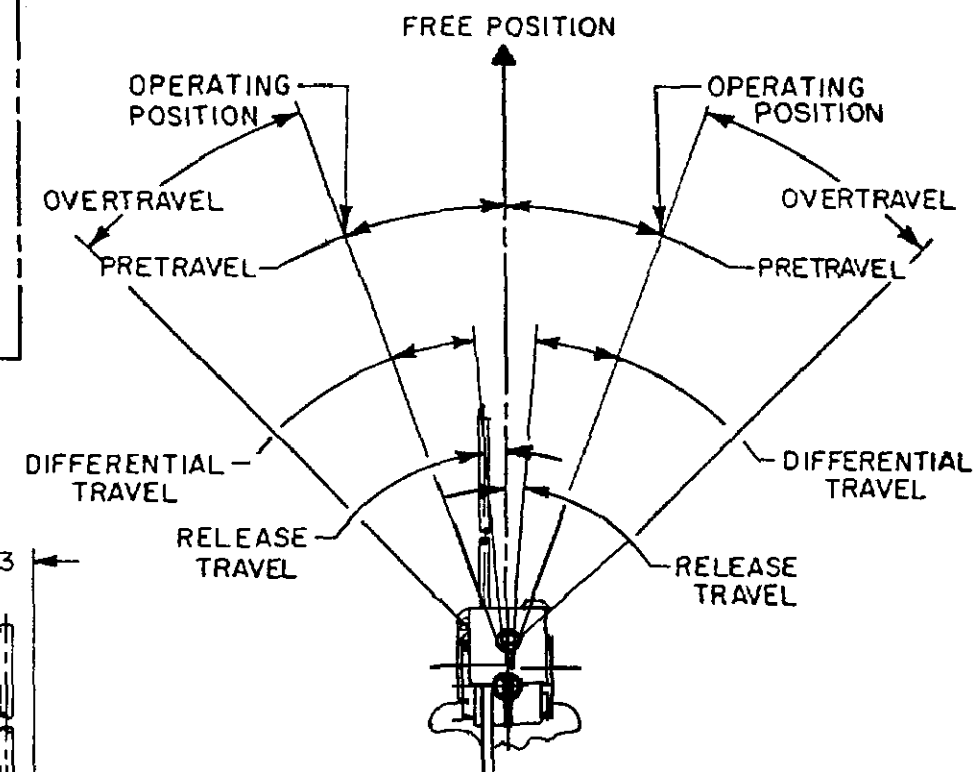


MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
1LS10-L

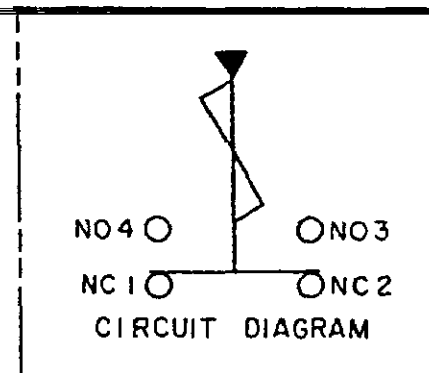

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING TORQUE----- 1.7 IN-LB MAX
FULL OVERTRAVEL TORQUE----- 2.4 IN-LB MAX
RELEASE TORQUE----- .35 IN-LB MIN
PRETRAVEL----- 20° MAX
DIFFERENTIAL TRAVEL----- 12° MAX
OVERTRAVEL----- 30° MIN
RELEASE TRAVEL----- 5° MIN
BASIC SWITCH REPLACEMENT----- 2MNI-L


ELECTRICAL DATA

CONTACT ARRANGEMENT
(SEE CIRCUIT DIAGRAM)

L126 10A 125, 250 OR 480 VAC
1/3HP 125 VAC, 3/4HP 250 VAC
0.8A 125 VDC, 0.4A 250 VDC



THIRD ANGLE PROJECTION



SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

NOTES

- 1 SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
- 2 TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION



4 SEAL TO BE FURNISHED BY USER
5 ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°
6 LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX

CATALOG LISTING
1LS10-L

ISSUE
15

REVISIONS
A CO-76997
GJW
14 MAR 95

REVISIONS
A CO-76997
GJW
14 MAR 95

FORMTEK
DRAWN
GJW
14 APR 95
JAF
5 MAY 95
CHECK
REPLACES
PR-9797