

SPECIFICATION

Part No.	:	A.01.C.301111
Product Name	:	GPS Hercules Heavy Duty Screw Mount Antenna
Description	:	Two Stage 30dB Active GPS Antenna. Height 29mm Diameter 49mm
Applications	:	Location based services M2M Telematics Remote monitoring Timing for base stations Vehicle fleet tracking



1. Introduction

The A.01 Hercules is a high performance thread mount GPS antenna designed for external use on vehicles and outdoor assets. Designed for heavy duty work with one piece C&C machined nickel steel base plate and threads, there are also convenient side slots for running cables laterally. Durable UV resistant ABS housing is resistant to vandalism and direct attack. At only 29mm high it complies with the latest EU directives for height restrictions, whilst also enabling covert operation with a diameter of 49mm.


Cable lengths, types and connectors are fully customizable. For cable lengths above 5M please use our 40dB LNA A.03 model and low loss cable.

2. Electrical Specifications


ELECTRICAL			
Frequency	1575.42MHz \pm 1.023MHz		
Dimensions	Height 29mm, Diameter 49mm,		
Impedance	50 ohm		
VSWR	2.0 Max		
GPS Patch Gain	2.0dB Passive Gain at Zenith -1.0dBi Gain at 10 degrees elevation		
Axial ratio	3.0 dB max		
Polarization	RHCP		
Out Band Rejection	fo = 1575.42MHz fo \pm 30 MHz 5dB Min. fo \pm 50 MHz 20dB Min. fo \pm 100 MHz 25dB Min.		
Input Voltage	Min.1.8V	Typ. 3.0V	Max. 5.5V
Total Gain @ Zenith	25dBic	30dBic	32dBic
Current Consumption	6mA	12mA	30mA
Noise Figure	2.7dB	3.0dB	3.7dB

3. LNA

3.1 LNA Functional Circuit

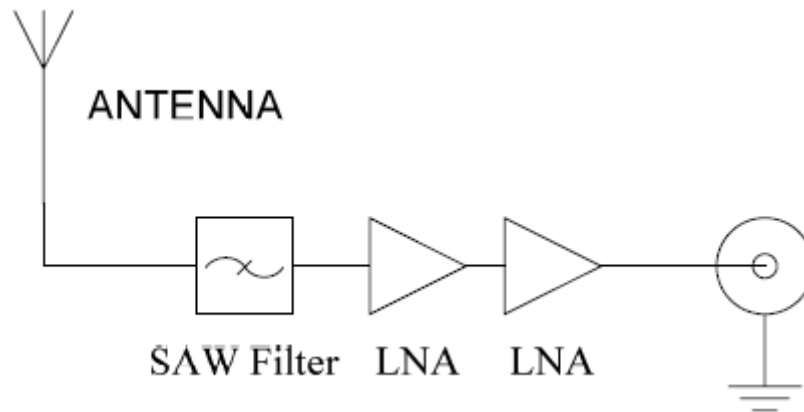


3.2 LNA Gain and Out-band Rejection @ 3.0V

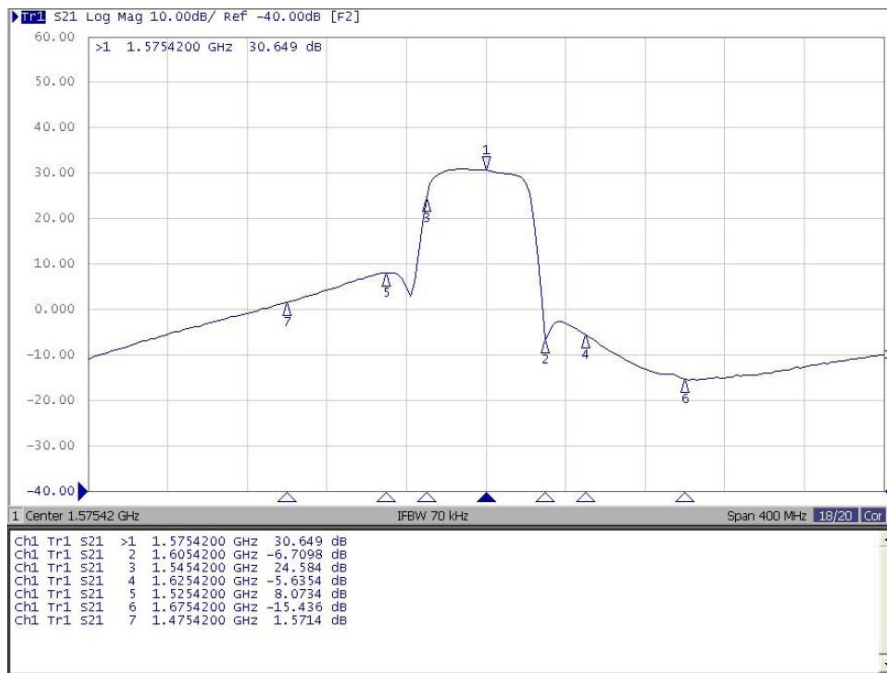


3.3 Noise Figure

Mkr1 1.5754 GHz 2.909 dB 30.298 dB

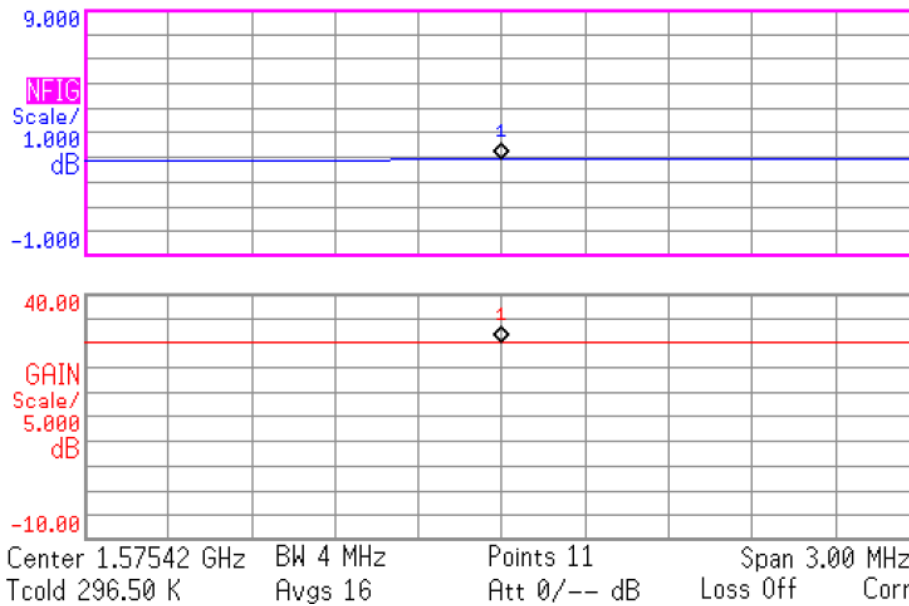

4. Radiation Patterns

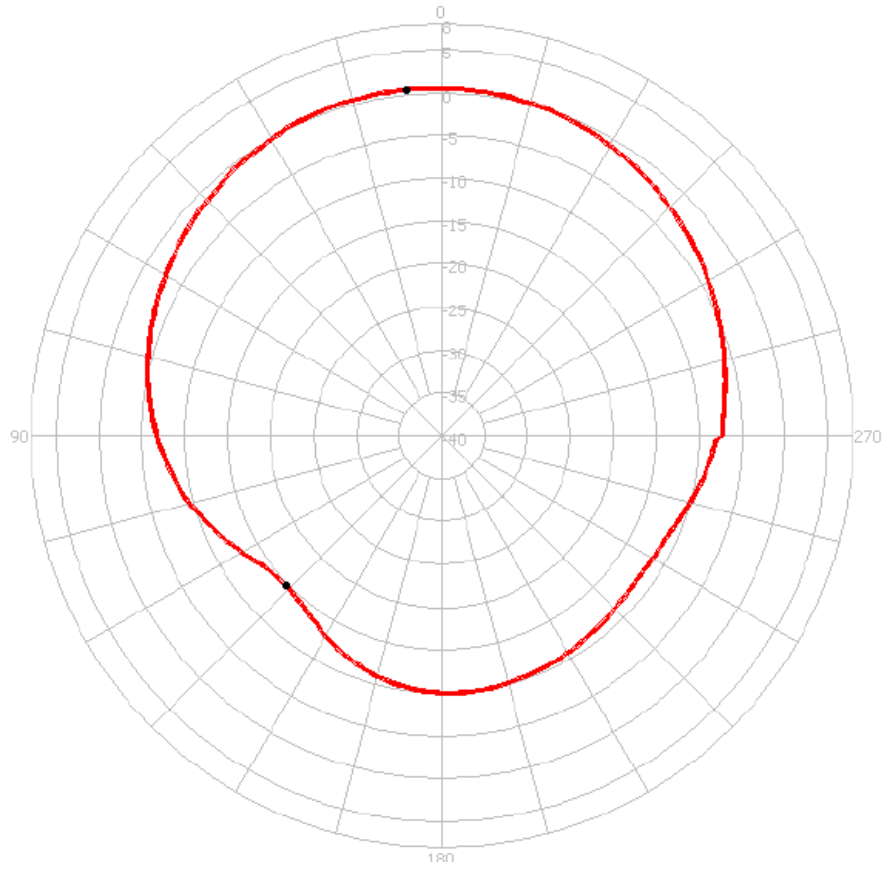


0 degree is the top of Hercules.

5. Mechanical Specifications

MECHANICAL	
Housing	UV resistant ABS
Thread and Base Plate	One piece C&C'd Nickel Steel
Sealing Foam	CR4305 with 3M9448B double-side adhesive
Waterproof	IP67
Thread Diameter	18mm
Recommended Mounting Torque	95Nm
Maximum Mounting Torque	135Nm
Operating Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +105°C
Cable/Connectors	3M RG-174 Cables and SMA Connectors (std) Fully Customizable

6. Mechanical Drawing

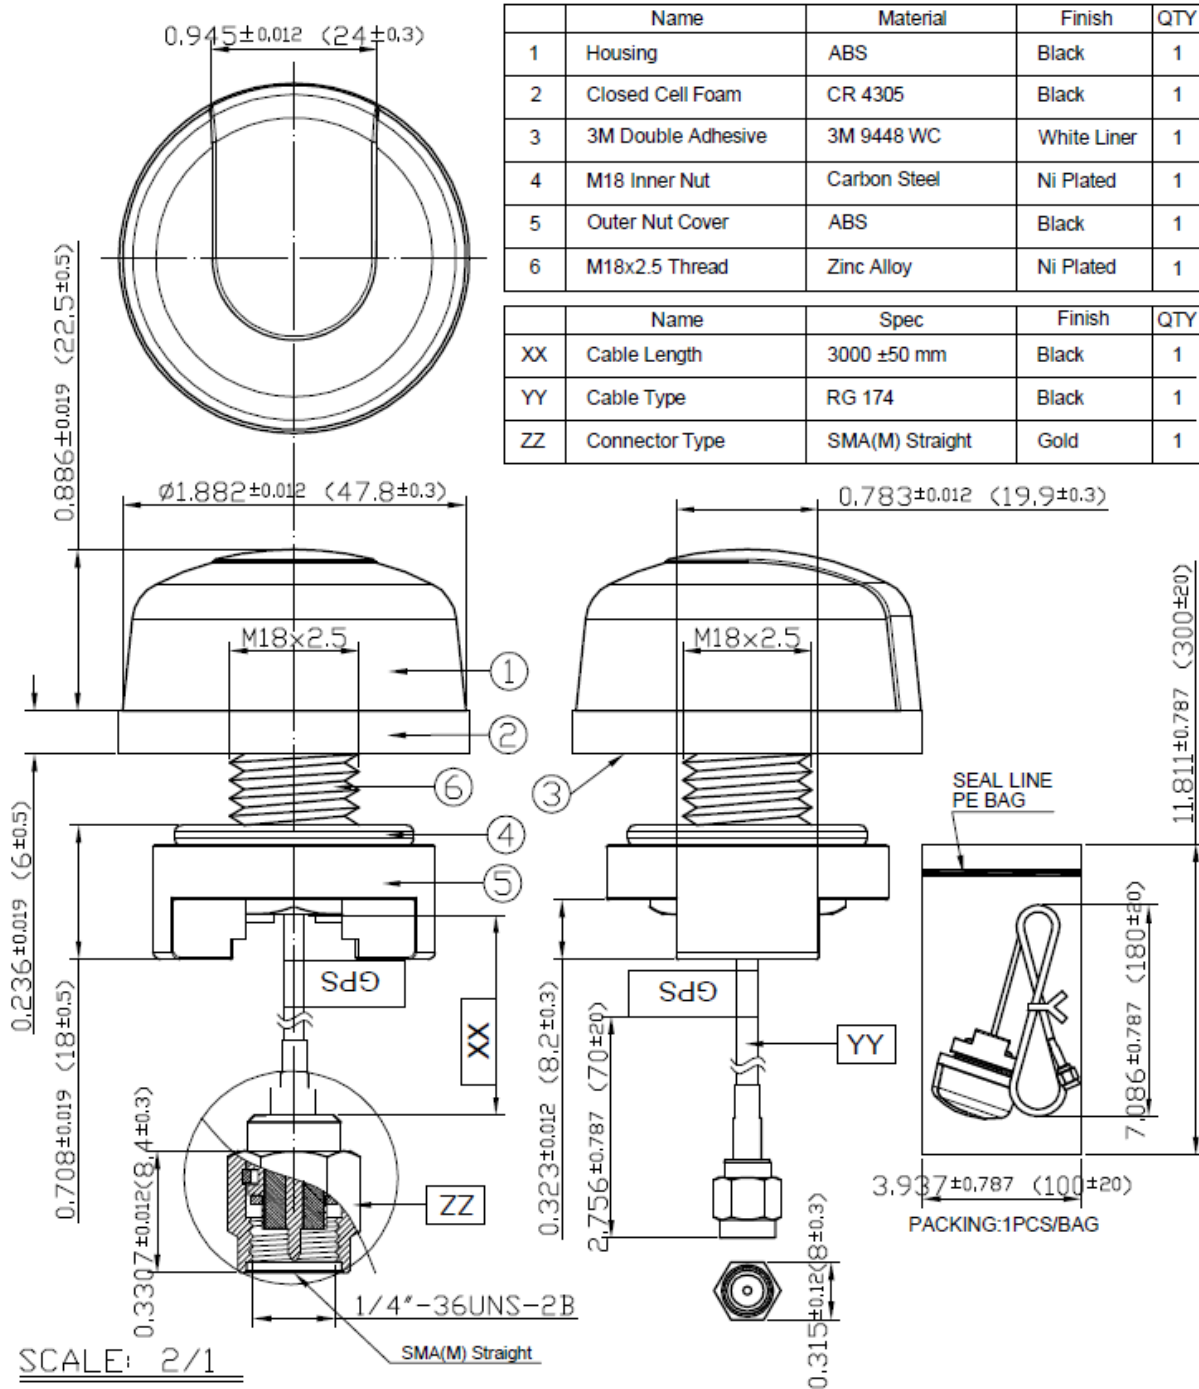


	Name	Material	Finish	QTY
1	Housing	ABS	Black	1
2	Closed Cell Foam	CR 4305	Black	1
3	3M Double Adhesive	3M 9448 WC	White Liner	1
4	M18 Inner Nut	Carbon Steel	Ni Plated	1
5	Outer Nut Cover	ABS	Black	1
6	M18x2.5 Thread	Zinc Alloy	Ni Plated	1

	Name	Spec	Finish	QTY
XX	Cable Length	3000 \pm 50 mm	Black	1
YY	Cable Type	RG 174	Black	1
ZZ	Connector Type	SMA(M) Straight	Gold	1

Unit : mm

7. Installation

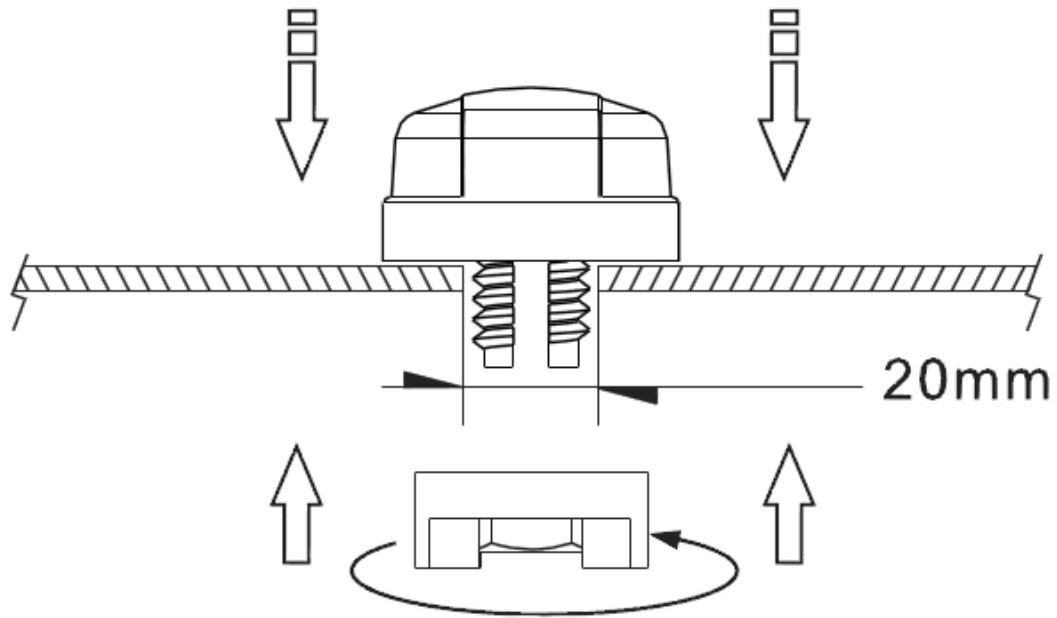

Recommended torque for mounting is 95Nm or 70ftlbs
Maximum torque for mounting is 135.6Nm or 100ft lbs

