

ADSP-BF527 EZ-KIT Lite® Evaluation System Manual

Revision 1.6, March 2010

Part Number
82-000208-01

Analog Devices, Inc.
One Technology Way
Norwood, Mass. 02062-9106



Copyright Information

© 2010 Analog Devices, Inc., ALL RIGHTS RESERVED. This document may not be reproduced in any form without prior, express written consent from Analog Devices, Inc.

Printed in the USA.

Disclaimer

Analog Devices, Inc. reserves the right to change this product without prior notice. Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under the patent rights of Analog Devices, Inc.

Trademark and Service Mark Notice

The Analog Devices logo, VisualDSP++, Blackfin, EZ-KIT Lite, and EZ-Extender are registered trademarks of Analog Devices, Inc.

All other brand and product names are trademarks or service marks of their respective owners.

Regulatory Compliance

The ADSP-BF527 EZ-KIT Lite is designed to be used solely in a laboratory environment. The board is not intended for use as a consumer end product or as a portion of a consumer end product. The board is an open system design which does not include a shielded enclosure and therefore may cause interference to other electrical devices in close proximity. This board should not be used in or near any medical equipment or RF devices.

The ADSP-BF527 EZ-KIT Lite has been certified to comply with the essential requirements of the European EMC directive 2004/108/EC and therefore carries the “CE” mark.

The ADSP-BF527 EZ-KIT Lite has been appended to Analog Devices, Inc. EMC Technical File (EMC TF) referenced **DSPTOOLS1**, issue 2 dated June 4, 2008 and was declared CE compliant by an appointed Notified Body (No.0673) as listed below.

Notified Body Statement of Compliance: Z600ANA2.030 dated June 4, 2008.



Issued by: Technology International (Europe) Limited
60 Shrivenham Hundred Business Park
Shrivenham, Swindon, SN6 8TY, UK

The EZ-KIT Lite evaluation system contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused EZ-KIT Lite boards in the protective shipping package.



CONTENTS

PREFACE

Product Overview	ix
Purpose of This Manual	xi
Intended Audience	xii
Manual Contents	xii
What’s New in This Manual	xiii
Technical or Customer Support	xiii
Supported Processors	xiv
Product Information	xiv
Analog Devices Web Site	xiv
VisualDSP++ Online Documentation	xv
Technical Library CD	xvi
EngineerZone	xvi
Social Networking Web Sites	xvii
Related Documents	xvii
Notation Conventions	xviii

USING ADSP-BF527 EZ-KIT LITE

Package Contents	1-3
------------------------	-----

Contents

Default Configuration	1-4
Installation and Session Startup	1-5
Evaluation License Restrictions	1-7
Lockbox Key	1-7
Memory Map	1-8
SDRAM Interface	1-10
Parallel Flash Memory Interface	1-12
NAND Flash Interface	1-13
SPI Interface	1-14
PPI Interface	1-14
LCD Module Interface	1-15
Touchscreen Interface	1-17
Keypad Interface	1-17
Rotary Encoder Interface	1-18
Ethernet Interface	1-18
Audio Interface	1-19
USB OTG Interface	1-21
UART Interface	1-22
RTC Interface	1-23
LEDs and Push Buttons	1-23
JTAG Interface	1-24
Expansion Interface	1-25
Power Measurements	1-26
Power-On-Self Test	1-26

Example Programs	1-27
Background Telemetry Channel	1-27
Reference Design Information	1-27

ADSP-BF527 EZ-KIT LITE HARDWARE REFERENCE

System Architecture	2-2
Programmable Flags	2-3
Push Buttons and Switches	2-10
ETH Enable Switch (SW1)	2-10
Boot Mode Select Switch (SW2)	2-11
Rotary Encoder with Momentary Switch (SW3)	2-12
MIC Gain Switch (SW4)	2-12
LCD Reset Switch (SW5)	2-13
Flash Enable Switch (SW7)	2-13
Mic/HP LPBK Audio Mode Switch (SW8)	2-14
ETH Mode Flash CS Switch (SW9)	2-14
UART Enable Switch (SW10)	2-15
Rotary NAND Enable Switch (SW11)	2-16
GPIO Enable Switch (SW13)	2-17
Programmable Flag Push Buttons (SW14–15)	2-18
Reset Push Button (SW16)	2-18
SPI/TWI Switch (SW19)	2-19
SPORT0A ENBL Switches (SW20 and SW27)	2-19
TFS0A/HOSTCE Enable Switch (SW21)	2-19
Touch ADD Switch (SW22)	2-19

Contents

Touchpad INT Switch (SW24)	2-20
LCD/KPAD CTL Switch (SW25)	2-20
Mode Switch (SW26)	2-21
Line In-Out LPBK Switch (SW28)	2-21
CPLD D8–13 Switch (SW29)	2-22
CPLD 14–15/DCE ENB Switch (SW30)	2-22
Jumpers	2-23
MIC Select Jumper (JP6)	2-23
STAMP Enable Jumper (JP7)	2-23
STP ENB Enable Jumper (JP14)	2-24
LED0 OFF Jumper (JP15)	2-24
VDDINT Power Jumper (P14)	2-24
VDDEXT Power Jumper (P15)	2-25
VDDMEM Power Jumper (P16)	2-25
LEDs	2-26
User LEDs (LED1–3)	2-26
Power LED (LED4)	2-27
Reset LED (LED5)	2-27
Ethernet LEDs (LED6–7)	2-27
Keypad Current Sink LED (LED8)	2-27
Connectors	2-28
Expansion Interface Connectors (J1–3)	2-28
DCE (RS-232) Connector (J4)	2-29
Battery Holder (J5)	2-29

Power Connector (J6)	2-30
Dual Audio Connectors (J7–8)	2-30
Ethernet Connector (J9)	2-30
USB OTG Connector (P1)	2-31
Keypad Connector (P2)	2-31
UART0 Connector (P5)	2-31
SPORT0 Connector (P6)	2-32
SPORT1 Connector (P7)	2-32
PPI Connector (P8)	2-32
SPI Connector (P9)	2-33
TWI Connector (P10)	2-33
TIMERS Connector (P11)	2-33
Host Interface Connector (P13)	2-34
CPLD JTAG Connector (P17)	2-34
LCD Data Connector (P18)	2-34
USB Debug Agent Connector (ZJ1)	2-35
JTAG Connector (ZP4)	2-35

ADSP-BF527 EZ-KIT LITE BILL OF MATERIALS

ADSP-BF527 EZ-KIT LITE SCHEMATIC

Title Page	B-1
Processor EBIU and Control	B-2
Series Termination	B-3
Processor Power	B-4

Contents

Memory	B-5
Processor USB OTG	B-6
Internal Audio Codec	B-7
RMII PHY	B-8
Touchscreen, Keypad, and Backlight	B-9
LCD, CPLD	B-10
Rotary Switch, RS-232	B-11
LEDs, Push Buttons, Reset, and Host Port	B-12
Expansion Interface and JTAG	B-13
STAMP Connectors	B-14
Power	B-15

INDEX

PREFACE

Thank you for purchasing the ADSP-BF527 EZ-KIT Lite[®], Analog Devices, Inc. evaluation system for the ADSP-BF523, ADSP-BF525, and ADSP-BF527 Blackfin[®] processors.

Blackfin processors embody a new type of embedded processor designed specifically to meet the computational demands and power constraints of today's embedded audio, video, and communications applications. They deliver breakthrough signal-processing performance and power efficiency within a reduced instruction set computing (RISC) programming model.

Blackfin processors support a media instruction set computing (MISC) architecture. This architecture is the natural merging of RISC, media functions, and digital signal processing (DSP) characteristics. Blackfin processors deliver signal-processing performance in a microprocessor-like environment.

Based on the Micro Signal Architecture (MSA), Blackfin processors combine a 32-bit RISC instruction set, dual 16-bit multiply accumulate (MAC) DSP functionality, and eight-bit video processing performance that had previously been the exclusive domain of very-long instruction word (VLIW) media processors.

The evaluation board is designed to be used in conjunction with the VisualDSP++[®] development environment to test capabilities of the ADSP-BF523/BF525/BF527 Blackfin processors. The VisualDSP++

development environment aids advanced application code development and debug, such as:

- Create, compile, assemble, and link application programs written in C++, C, and ADSP-BF527 assembly
- Load, run, step, halt, and set breakpoints in application programs
- Read and write data and program memory
- Read and write core and peripheral registers
- Plot memory

Access to the processor from a personal computer (PC) is achieved through a USB port or an external JTAG emulator. The USB interface provides unrestricted access to the ADSP-BF527 processor and evaluation board peripherals. Analog Devices JTAG emulators offer faster communication between the host PC and target hardware. Analog Devices carries a wide range of in-circuit emulation products. To learn more about Analog Devices emulators and processor development tools, go to <http://www.analog.com/dsp/tools/>.

The ADSP-BF527 EZ-KIT Lite provides example programs to demonstrate the evaluation board capabilities.



The ADSP-BF527 EZ-KIT Lite installation is part of the VisualDSP++ installation. The EZ-KIT Lite is a licensed product that offers an unrestricted evaluation license for the first 90 days. For details about evaluation license restrictions after the 90 days, refer to “[Evaluation License Restrictions](#)” on page 1-7 and the *VisualDSP++ Installation Quick Reference Card*.

Product Overview

The board features:

- Analog Devices ADSP-BF527 Blackfin processor
 - Core performance up to 600 MHz
 - External bus performance up to 133 MHz
 - 289-pin 0.5 mm pitch mini-BGA package
 - 25 MHz oscillator
- Synchronous dynamic random access memory (SDRAM)
 - Micron MT48LC32M16A2TG – 64 MB (8M x 16 bits x 4 banks)
- Parallel flash memory
 - ST Micro M29W320EB – 32 Mb (2M x 16 bits)
- NAND flash memory
 - Numonyx NAND04 – 4 Gb
- SPI flash memory
 - ST Micro M25P16 – 16 Mb
- Internal audio codec
 - Low-power audio codec
 - One stereo LINE OUT jack
 - One input MIC jack
 - One input stereo LINE IN jack

Product Overview

- TFT LCD display with touchscreen
 - Sharp LQ035Q1DH02 320 x 240 3.5” touchscreen LCD
 - Analog Devices AD7879-1 four-wire touchscreen controller
- Ethernet interface
 - SMSC LAN8700 PHY device
 - 10-BaseT and 100-BaseTX Ethernet controller
 - Auto-MDIX
- Keypad
 - Analog Devices ADP5520 keypad controller
 - ACT components– 4 x 4 keypad assembly
- Thumbwheel
 - CTS Corp rotary encoder
- Universal asynchronous receiver/transmitter (UART)
 - ADM3202 RS-232 line driver/receiver
 - DB9 female connector
- LEDs
 - Ten LEDs: one power (green), one board reset (red), three general-purpose (yellow), one USB monitor (amber), PHY link (yellow), PHY activity (green), keypad controller (red), and FPGA done (yellow)

- Push buttons
 - Three push buttons: one reset, two programmable flags with debounce logic
- Expansion interface
 - Provides access to all ADSP-BF527 processor signals
- Other features
 - JTAG ICE 14-pin header
 - USB OTG connector
 - HOST interface connector
 - Power measurement jumpers
 - PPI IDC connector
 - SPORT0 and SPORT1 IDC connectors
 - TWI, SPI, timers, and UART0 IDC connectors

For information about the hardware components of the EZ-KIT Lite, refer to [“ADSP-BF527 EZ-KIT Lite Hardware Reference” on page 2-1](#).

Purpose of This Manual

The *ADSP-BF527 EZ-KIT Lite Evaluation System Manual* provides instructions for installing the product hardware (board). The text describes operation and configuration of the board components and provides guidelines for running your own code on the ADSP-BF527 EZ-KIT Lite. Finally, a schematic and a bill of materials are provided as a reference guide for future designs.

Intended Audience

The product software installation is detailed in the *VisualDSP++ Installation Quick Reference Card*.

Intended Audience

The primary audience for this manual is a programmer who is familiar with Analog Devices processors. This manual assumes that the audience has a working knowledge of the appropriate processor architecture and instruction set. Programmers who are unfamiliar with Analog Devices processors can use this manual but should supplement it with other texts (such as the *ADSP-BF52x Blackfin Processor Hardware Reference* and *Blackfin Processor Instruction Set Reference*) that describe your target architecture.

Programmers who are unfamiliar with VisualDSP++ should refer to the VisualDSP++ online Help and user's or getting started guides. For the locations of these documents, see [“Related Documents”](#).

Manual Contents

The manual consists of:

- Chapter 1, [“Using ADSP-BF527 EZ-KIT Lite” on page 1-1](#)
Describes EZ-KIT Lite operation from a programmer's perspective and provides a simplified memory map.
- Chapter 2, [“ADSP-BF527 EZ-KIT Lite Hardware Reference” on page 2-1](#)
Provides information on the EZ-KIT Lite hardware components.

- Appendix A, “[ADSP-BF527 EZ-KIT Lite Bill Of Materials](#)” on [page A-1](#)
Provides a list of components used to manufacture the EZ-KIT Lite board.
- Appendix B, “[ADSP-BF527 EZ-KIT Lite Schematic](#)” on [page B-1](#)
Provides the resources for board-level debugging, can be used as a reference guide. Appendix B is part of the online Help.

What's New in This Manual

The *ADSP-BF527 EZ-KIT Lite Evaluation System Manual* has been updated to reflect the latest board revision. In addition, modifications and corrections based on errata reports against the previous manual revision have been made.

Technical or Customer Support

You can reach Analog Devices, Inc. Customer Support in the following ways:

- Visit the Embedded Processing and DSP products Web site at http://www.analog.com/processors/technical_support
- E-mail tools questions to processor.tools.support@analog.com
- E-mail processor questions to processor.support@analog.com (World wide support)
processor.europe@analog.com (Europe support)
processor.china@analog.com (China support)
- Phone questions to 1-800-ANALOGD

Supported Processors

- Contact your Analog Devices, Inc. local sales office or authorized distributor
- Send questions by mail to:
Analog Devices, Inc.
One Technology Way
P.O. Box 9106
Norwood, MA 02062-9106
USA

Supported Processors

This evaluation system supports Analog Devices ADSP-BF527 Blackfin embedded processors. Functionality of the ADSP-BF523 and ADSP-BF525 processors can be evaluated using the same product because the processors have many similarities.

Product Information

Product information can be obtained from the Analog Devices Web site, VisualDSP++ online Help system, and a technical library CD.

Analog Devices Web Site

The Analog Devices Web site, www.analog.com, provides information about a broad range of products—analog integrated circuits, amplifiers, converters, and digital signal processors.

To access a complete technical library for each processor family, go to http://www.analog.com/processors/technical_library. The manuals selection opens a list of current manuals related to the product as well as a link to the previous revisions of the manuals. When locating your manual

title, note a possible errata check mark next to the title that leads to the current correction report against the manual.

Also note, MyAnalog.com is a free feature of the Analog Devices Web site that allows customization of a Web page to display only the latest information about products you are interested in. You can choose to receive weekly e-mail notifications containing updates to the Web pages that meet your interests, including documentation errata against all manuals.

MyAnalog.com provides access to books, application notes, data sheets, code examples, and more.

Visit MyAnalog.com to sign up. If you are a registered user, just log on. Your user name is your e-mail address.

VisualDSP++ Online Documentation

Online documentation comprises the VisualDSP++ Help system, software tools manuals, hardware tools manuals, processor manuals, Dinkum Abridged C++ library, and FLEXnet License Tools software documentation. You can search easily across the entire VisualDSP++ documentation set for any topic of interest.

For easy printing, supplementary Portable Documentation Format (.pdf) files for all manuals are provided on the VisualDSP++ installation CD.

Each documentation file type is described as follows.

File	Description
.chm	Help system files and manuals in Microsoft help format
.htm or .html	Dinkum Abridged C++ library and FLEXnet License Tools software documentation. Viewing and printing the .html files requires a browser, such as Internet Explorer 6.0 (or higher).
.pdf	VisualDSP++ and processor manuals in PDF format. Viewing and printing the .pdf files requires a PDF reader, such as Adobe Acrobat Reader (4.0 or higher).

Technical Library CD

The technical library CD contains seminar materials, product highlights, a selection guide, and documentation files of processor manuals, VisualDSP++ software manuals, and hardware tools manuals for the following processor families: Blackfin, SHARC, TigerSHARC, ADSP-218x, and ADSP-219x.

To order the technical library CD, go to http://www.analog.com/processors/technical_library, navigate to the manuals page for your processor, click the request CD check mark, and fill out the order form.

Data sheets, which can be downloaded from the Analog Devices Web site, change rapidly, and therefore are not included on the technical library CD. Technical manuals change periodically. Check the Web site for the latest manual revisions and associated documentation errata.

EngineerZone

EngineerZone is a technical support forum from Analog Devices. It allows you direct access to ADI technical support engineers. You can search FAQs and technical information to get quick answers to your embedded processing and DSP design questions.

Use EngineerZone to connect with other DSP developers who face similar design challenges. You can also use this open forum to share knowledge and collaborate with the ADI support team and your peers. Visit <http://ez.analog.com> to sign up.

Social Networking Web Sites

You can now follow Analog Devices SHARC development on Twitter and LinkedIn. To access:

- Twitter: <http://twitter.com/ADIs narc>
- LinkedIn: Network with the LinkedIn group, Analog Devices SHARC or Analog Devices Blackfin: <http://www.linkedin.com>

Related Documents

For information on product related development software, see the following publications.

Table 1. Related Processor Publications

Title	Description
<i>ADSP-BF522/ADSP-BF525/ADSP-BF527 Blackfin Embedded Processor Data Sheet</i>	General functional description, pinout, and timing.
<i>ADSP-BF2x Blackfin Processor Hardware Reference</i>	Description of the internal processor architecture and all register functions.
<i>Blackfin Processor Programming Reference</i>	Description of all allowed processor assembly instructions

Table 2. Related VisualDSP++ Publications

Title	Description
<i>ADSP-BF527 EZ-KIT Lite Evaluation System Manual</i>	Description of the hardware capabilities of the evaluation system; description of how to access these capabilities in the VisualDSP++ environment.
<i>VisualDSP++ Assembler and Preprocessor Manuals</i>	Description of the assembler function and commands.

Notation Conventions

Table 2. Related VisualDSP++ Publications (Cont'd)

Title	Description
<i>VisualDSP++ C/C++ Compiler and Library Manual for Blackfin Processors</i>	Description of the compiler function and commands for Blackfin processors.
<i>VisualDSP++ Linker and Utilities Manual</i>	Description of the linker function and commands.
<i>VisualDSP++ Loader and Utilities Manual</i>	Description of the loader/splitter function and commands.
<i>VisualDSP++ Device Drivers and System Services Manual for Blackfin Processors</i>	Description of the device drivers' and system services' functions and commands.

Notation Conventions

Text conventions used in this manual are identified and described as follows.

Example	Description
Close command (File menu)	Titles in reference sections indicate the location of an item within the VisualDSP++ environment's menu system (for example, the Close command appears on the File menu).
{this that}	Alternative required items in syntax descriptions appear within curly brackets and separated by vertical bars; read the example as <i>this</i> or <i>that</i> . One or the other is required.
[this that]	Optional items in syntax descriptions appear within brackets and separated by vertical bars; read the example as an optional <i>this</i> or <i>that</i> .
[this,...]	Optional item lists in syntax descriptions appear within brackets delimited by commas and terminated with an ellipse; read the example as an optional comma-separated list of <i>this</i> .
.SECTION	Commands, directives, keywords, and feature names are in text with letter gothic font.
<i>filename</i>	Non-keyword placeholders appear in text with italic style format.

Example	Description
	Note: For correct operation, ... A Note provides supplementary information on a related topic. In the online version of this book, the word Note appears instead of this symbol.
	Caution: Incorrect device operation may result if ... Caution: Device damage may result if ... A Caution identifies conditions or inappropriate usage of the product that could lead to undesirable results or product damage. In the online version of this book, the word Caution appears instead of this symbol.
	Warning: Injury to device users may result if ... A Warning identifies conditions or inappropriate usage of the product that could lead to conditions that are potentially hazardous for the devices users. In the online version of this book, the word Warning appears instead of this symbol.

Notation Conventions

1 USING ADSP-BF527 EZ-KIT LITE

This chapter provides information to assist you with development of programs for the ADSP-BF527 EZ-KIT Lite evaluation system.

The following topics are covered.

- “Package Contents” on page 1-3
- “Default Configuration” on page 1-4
- “Installation and Session Startup” on page 1-5
- “Evaluation License Restrictions” on page 1-7
- “Memory Map” on page 1-8
- “SDRAM Interface” on page 1-10
- “Parallel Flash Memory Interface” on page 1-12
- “NAND Flash Interface” on page 1-13
- “SPI Interface” on page 1-14
- “PPI Interface” on page 1-14
- “LCD Module Interface” on page 1-15
- “Touchscreen Interface” on page 1-17
- “Keypad Interface” on page 1-17
- “Rotary Encoder Interface” on page 1-18

- “Ethernet Interface” on page 1-18
- “Audio Interface” on page 1-19
- “USB OTG Interface” on page 1-21
- “UART Interface” on page 1-22
- “RTC Interface” on page 1-23
- “LEDs and Push Buttons” on page 1-23
- “JTAG Interface” on page 1-24
- “Expansion Interface” on page 1-25
- “Power Measurements” on page 1-26
- “Power-On-Self Test” on page 1-26
- “Example Programs” on page 1-27
- “Background Telemetry Channel” on page 1-27
- “Reference Design Information” on page 1-27

For information about VisualDSP++, including the boot loading, target options, and other facilities of the EZ-KIT Lite system, refer to the online Help.

For more detailed information about the ADSP-BF527 Blackfin processor, see documents referred to as “[Related Documents](#)”.

Package Contents

Your ADSP-BF527 EZ-KIT Lite evaluation system package contains the following items.

- ADSP-BF527 EZ-KIT Lite board
- *VisualDSP++ Installation Quick Reference Card*
- CD containing:
 - VisualDSP++ software
 - ADSP-BF527 EZ-KIT Lite debug software
 - USB driver files
 - Example programs
- Universal 7.0V DC power supply
- Ethernet patch cable
- Three 3.5 mm male-to-male audio cables
- 3.5 mm headphones
- USB A-B male cable for USB debug agent
- 5-in-1 cable and connectors for USB on-the-go (OTG) applications
- Ethernet loopback connector

Contact the vendor where you purchased your EZ-KIT Lite or contact Analog Devices, Inc. if any item is missing.

Default Configuration

The ADSP-BF527 EZ-KIT Lite board is designed to run outside your personal computer as a stand-alone unit. You do not have to open your computer case.

The EZ-KIT Lite evaluation system contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused EZ-KIT Lite boards in the protective shipping package.



When removing the EZ-KIT Lite board from the package, handle the board carefully to avoid the discharge of static electricity, which can damage some components. [Figure 1-1](#) shows the default jumper settings, switches, connector locations, and LEDs used in installation. Confirm that your board is in the default configuration before using the board.

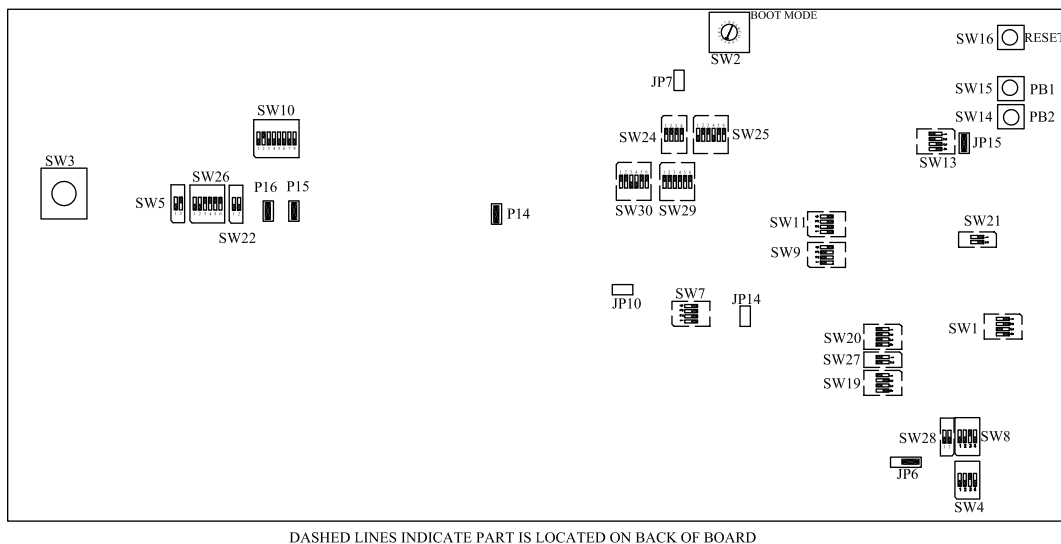


Figure 1-1. EZ-KIT Lite Hardware Setup

Installation and Session Startup

For correct operation, install the software and hardware in the order presented in the *VisualDSP++ Installation Quick Reference Card*.



There are two USB interfaces on the ADSP-BF527 EZ-KIT Lite. Be sure to use the debugger's interface (ZJ1) when connecting your computer to the board with provided USB cable. The other USB interface (labelled USB-OTG, P1) is for applications use.

1. Verify that the yellow USB monitor LED (ZLED3, located near the USB connector) is lit. This signifies that the board is communicating properly with the host PC and is ready to run VisualDSP++.
2. If you are running VisualDSP++ for the first time, navigate to the VisualDSP++ environment via the **Start→Programs** menu. The main window appears. Note that VisualDSP++ does not connect to any session. Skip the rest of this step to step 3.

If you have run VisualDSP++ previously, the last opened session appears on the screen. You can override the default behavior and force VisualDSP++ to start a new session by pressing and holding down the **Ctrl** key while starting VisualDSP++. Do not release the **Ctrl** key until the **Session Wizard** appears on the screen. Go to step 4.

3. To connect to a new EZ-KIT Lite session, start **Session Wizard** by selecting one of the following.
 - From the **Session** menu, **New Session**.
 - From the **Session** menu, **Session List**. Then click **New Session** from the **Session List** dialog box.
 - From the **Session** menu, **Connect to Target**.

Installation and Session Startup

4. The **Select Processor** page of the wizard appears on the screen. Ensure **Blackfin** is selected in **Processor family**. In **Choose a target processor**, select **ADSP-BF527**. Click **Next**.
5. The **Select Connection Type** page of the wizard appears on the screen. Select **EZ-KIT Lite** and click **Next**.
6. The **Select Platform** page of the wizard appears on the screen. Ensure that the selected platform is **ADSP-BF527 EZ-KIT Lite via Debug Agent**. Specify your own **Session name** for the session or accept the default name.

The session name can be a string of any length; although, the box displays approximately 32 characters. The session name can include space characters. If you do not specify a session name, VisualDSP++ creates a session name by combining the name of the selected platform with the selected processor. The only way to change a session name later is to delete the session and open a new session.

Click **Next**.

7. The **Finish** page of the wizard appears on the screen. The page displays your selections. Check the selections. If you are not satisfied, click **Back** to make changes; otherwise, click **Finish**. VisualDSP++ creates the new session and connects to the EZ-KIT Lite. Once connected, the main window's title is changed to include the session name set in step 6.



To disconnect from a session, click the disconnect button or select **Session**→**Disconnect from Target**.



To delete a session, select **Session** → **Session List**. Select the session name from the list and click **Delete**. Click **OK**.

Evaluation License Restrictions

The ADSP-BF527 EZ-KIT Lite installation is part of the VisualDSP++ installation. The EZ-KIT Lite is a licensed product that offers an unrestricted evaluation license for the first 90 days. Once the initial unrestricted 90-day evaluation license expires:

- VisualDSP++ restricts a connection to the ADSP-BF527 EZ-KIT Lite via the USB debug agent interface only. Connections to simulators and emulation products are no longer allowed.
- The linker restricts a user program to 20 KB of memory for code space with no restrictions for data space.
- The EZ-KIT Lite hardware must be connected and powered up to use VisualDSP++ with a valid evaluation or permanent license.

Refer to the *VisualDSP++ Installation Quick Reference Card* for details.

Lockbox Key

The ADSP-BF527 Blackfin processors feature Lockbox™ secure technology: hardware-enabled code security and content protection for one-time programmable (OTP) memory. Customers purchasing the ADSP-BF527 processors can program their own customer public key in OTP memory.

The ADSP-BF527 EZ-KIT Lites are special cases—evaluation boards with the Lockbox keys pre-programmed and publicly documented—the burden of key generation and OTP programming of public keys is removed from the customer. Customers can still program other areas of OTP memory on the ADSP-BF527 EZ-KIT Lite. Analog Devices publicly document the EZ-KIT Lite's public and private key pair for customer evaluation and support of the Lockbox feature, all while avoiding any keys information exchange. As a result, there is no confidentiality associated with the Lockbox key on EZ-KIT Lites.

Memory Map

To demonstrate Lockbox features using an EZ-KIT Lite, you must use the keys that are provided pre-programmed on your EZ-KIT Lite.



Use the EZ-KIT Lite key pair to generate a demo and then provide the keys to the demo users. Note that the EZ-KIT Lite cannot be used to secure any confidential information. If you wish to create a demo with confidential keys, you must build your own Blackfin board and personalize it with your own keys.

Memory Map

The ADSP-BF527 processor has internal static random access memory (SRAM) used for instructions or data storage. See [Table 1-1](#). The internal memory details can be found in the *ADSP-BF2x Blackfin Processor Hardware Reference*.

The ADSP-BF527 EZ-KIT Lite board includes four types of external memory: synchronous dynamic random access memory (SDRAM), serial peripheral interconnect (SPI), parallel flash, and NAND flash. See

[Table 1-2](#). For more information about a specific memory type, go the respective section in this chapter.

Table 1-1. EZ-KIT Lite Internal Memory Map

Start Address	Content
0xEF00 0000	BOOT ROM (32K BYTE)
0xEF00 8000 0xFEB0 0000 0xFEB2 0000 0xFF40 0000 0xFF40 4000 0xFF40 8000 0xFF50 0000 0xFF50 4000 0xFF50 8000 0xFF60 0000 0xFF60 4000 0xFF60 8000 0xFF60 C000 0xFF61 0000 0xFF61 4000 0xFF70 0000 0xFF70 1000	Reserved
0xFF80 0000	L1 DATA BANKA SRAM (16K BYTE)
0xFF80 4000	L1 DATA BANKA SRAM/CACHE (16K BYTE)
0xFF80 8000	Reserved
0xFF90 0000	L1 DATA BANKB SRAM (16K BYTE)
0xFF90 4000	L1 DATA BANKB SRAM/CACHE (16K BYTE)
0xFF90 8000	Reserved
0xFFA0 0000	L1 INSTRUCTION BANKA LOWER SRAM (16K BYTE)
0xFFA0 4000	L1 INSTRUCTION BANKA UPPER SRAM (16K BYTE)
0xFFA0 8000	L1 INSTRUCTION BANKB LOWER SRAM (16K BYTE)
0xFFA0 C000	Reserved
0xFFA1 0000	L1 INSTRUCTION SRAM/CACHE (16K BYTE)

SDRAM Interface

Table 1-1. EZ-KIT Lite Internal Memory Map (Cont'd)

Start Address	Content
0xFFA1 4000 0xFFA1 8000 0xFFA1 C000 0xFFA2 0000 0xFFA2 4000	Reserved
0xFFB0 0000	L1 SCRATCHPAD SRAM (4K BYTE)
0xFFB0 1000	Reserved
0xFFC0 0000	SYSTEM MMR REGISTERS
0xFFE0 0000	CORE MMR REGISTERS

Table 1-2. EZ-KIT Lite External Memory Map

Start Address	End Address	Content
0x0000 0000	0x03FF FFFF	SDRAM bank 0 (SDRAM)
0x2000 0000	0x200F FFFF	ASYNCR memory bank 0 (flash)
0x2010 0000	0x201F FFFF	ASYNCR memory bank 1 (flash)
0x2020 0000	0x202F FFFF	ASYNCR memory bank 2 (flash)
0x2030 0000	0x203F FFFF	ASYNCR memory bank 3 (flash)
0x2040 0000	0xEEFF FFFF	Reserved

SDRAM Interface

The ADSP-BF527 processor connects to a 64 MB Micron MT48LC32M16A2TG-75 chip through the external bus interface unit (EBIU). The SDRAM chip can operate at a maximum clock frequency of 133 MHz.

With a VisualDSP++ session running and connected to the EZ-KIT Lite board via the USB debug agent, SDRAM registers are configured automatically with values listed in [Table 1-3](#) each time the processor is reset.

The values are used whenever SDRAM is accessed through the debugger (for example, when viewing memory windows or loading a program).

To disable the automatic setting of SDRAM registers, select **Target Options** from the **Settings** menu in VisualDSP++ and uncheck **Use XML reset values**. For more information on changing the reset values, refer to the online Help.

Table 1-3. SDRAM Default Settings with a 133 MHz SCLK

Register	Value	Function
pEBIU_SDRRC	0x0407	Calculated with SCLK = 133 MHz fSCLK = 133 MHz tREF = 64 ms NRA = 8192 row addresses tRAS = 6 clock cycles tRP = 2 clock cycles RDIV = 0x407
pEBIU_SDBCTL	0x0025	EBCAW = 10 bits EBSZ = 64M byte EBE = enabled
pEBIU_SDGCTL	0x0091998d	TSCSR = 45 degrees C EMREN = disabled FBBRW = disabled PSSE = enables SDRAM powerup sequence on next SDRAM access PSM = precharge, 8 BCBR refresh cycles, mode register set PUPSD = no extra delay added before first precharge command TWR = 2 cycles TRCD = 3 cycles TRP = 3 cycles TRAS = 6 cycles PASR = all 4 banks refreshed CL = CAS latency 3 cycles SCTLE = CLOUT disabled

Parallel Flash Memory Interface

[Table 1-4](#) shows the PLL register settings using a 400 MHz CCLK and 133 MHz SCLK. The PLL_CTL and PLL_DIV registers are initialized in the user code to achieve maximum performance.

Table 1-4. PLL Register Settings

Register	SCLK = 133 MHz CCLK = 400 MHz
PLL_CTL	16
PLL_DIV	3

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the SDRAM interface. For more information on how to initialize the registers after a reset, search the VisualDSP++ online Help for “reset values”.

Parallel Flash Memory Interface

The parallel flash memory interface of the ADSP-BF527 EZ-KIT Lite contains a 4 MB (2M x 16 bits) ST Micro M29W320EB chip. Flash memory is connected to the 16-bit data bus and address lines 1 through 19. Chip enable is decoded by using AMS0–3 select lines through NAND and AND gates. The address range for flash memory is 0x2000 0000 to 0x203F FFFF.

Flash memory is pre-loaded with boot code for the blink, LCD images, and power-on-self test (POST) programs. For more information, refer to “[Power-On-Self Test](#)” on [page 1-26](#).

By default, the EZ-KIT Lite boots from the 16-bit parallel flash memory. The processor boots from flash memory if the boot mode select switch (SW2) is set to a position of 1; see “[Boot Mode Select Switch \(SW2\)](#)” on [page 2-11](#).

Flash memory code can be modified. For instructions, refer to the online Help and example program included in the EZ-KIT Lite installation directory.

NAND Flash Interface

The ADSP-BF527 processor is equipped with an internal NAND flash controller, which allows the 4 Gbit ST Micro's NAND04 device to be attached gluelessly to the processor. NAND flash is attached via the processor's specific NAND flash control and data lines. NAND flash shares pins with the Ethernet PHY, host connector, and expansion interface.

The NAND chip enable signal (NDCE#_HOSTD10) can be disconnected from NAND flash by turning SW11.4 (switch 11 position 4) OFF. This ensures that the NAND will not be driving data when HOSTD10 changes state. See “Rotary NAND Enable Switch (SW11)” on page 2-16 for more information.

The Ethernet PHY (U14) must be disabled in order for NAND flash to function properly. This is accomplished by setting SW1 to OFF, OFF, ON, OFF.

For more information about the NAND04 device, refer to the Numonyx Web site at:

<http://www.numonyx.com/en-US/MemoryProducts/NAND/Pages/SLCLargePage.aspx>.

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the NAND flash interface.

SPI Interface

The ADSP-BF527 processor has one serial peripheral interface (SPI) port with multiple chip select lines. The SPI port connects directly to serial flash memory, LCD, audio codec, and expansion interface.

Serial flash memory is a 16 Mb ST Micro M25P16 device, which is selected using the `SPISEL1` line of the processor. SPI flash memory is pre-loaded with boot code for the blink and POST programs. For more information, refer to [“Power-On-Self Test” on page 1-26](#). By default, the EZ-KIT Lite boots from the 16-bit flash parallel memory. SPI flash can be selected as the boot source by setting the boot mode select switch (SW2) to position 3; see [“Boot Mode Select Switch \(SW2\)” on page 2-11](#).

SPI flash code can be modified. For instructions, refer to the VisualDSP++ online Help and example program included in the EZ-KIT Lite installation directory.

By default, the audio codec is set up to use the `SPISEL5` signal as the SPI chip select when configuring the codec. The chip select is shared with the `HOSTD9` signal. For more information, refer to [“Audio Interface” on page 1-19](#).

By default, the LCD is setup to use `SPISEL7`. The LCD optionally can use `SPISEL1` or `SPISEL5` by setting SW25 appropriately. For more information, refer to [“LCD/KPAD CTL Switch \(SW25\)” on page 2-20](#).

PPI Interface

The ADSP-BF527 processor provides a parallel peripheral interface (PPI), supporting data widths up to 16 bits. The PPI interface provides three multiplexed frame syncs, a dedicated clock input, and 16 data lines. The EZ-KIT Lite uses an eight-bit data connection to the TFT LCD module. The full PPI port is accessible on the PPI connector P8 and expansion interface.

The PPI signals are connected to multi-function pins; the upper eight data bit signals are configured for the rotary, SPI, UART1, and LED0 interfaces.

The PPI interface is set up to drive the LCD through a complex programmable logic device (CPLD). The CPLD has a 15 MHz oscillator input and drives PPICLK at 5 MHz, 10 MHz or 15 MHz, depending on the LCD display mode chosen. For more information, refer to the “[LCD Module Interface](#)” on page 1-15.

The source of the PPI clock can be configured by software via the PPI_SEL signal. The signal connects to the processor’s flag pin PG12 by setting SW13 position 4 ON. Flag pin PG12 is shared with the HOSTACK_LED2 signal. When the clock select line is used, HOSTACK and LED2 are not available. The PPISEL signal does not need to be driven if the default CPLD clock is used; PPISEL is driven when the expansion interface is used as the clocking source. Refer to “[GPIO Enable Switch \(SW13\)](#)” on page 2-17 for more information.

LCD Module Interface

The EZ-KIT Lite features a Sharp LQ035Q1DH02 TFT LCD module with touchscreen overlay. This is a 3.5” landscape display with a resolution of 320 x 240 pixels and a color depth of 16 bits. By default, the interface is an RGB-888 serial parallel interface, eight bits of red, followed by eight bits of green, and then eight bits of blue.

To configure the PPI interface, refer to the LCD software example located in the `<install_path>\Blackfin\Examples\ADSP-BF527 EZ-KIT Lite\POST` directory of VisualDSP++. The configuration values are obtained from the timing characteristics section of the Sharp LQ035Q1DH02 data sheet.

The LCD interface setup is flexible and allows three data formats: RGB888 (24 bits per pixel), RGB565 (16 bits per pixel), and 16-bit pass through mode. All LCD signals are input from the processor into a Xilinx

LCD Module Interface

CPLD (XC95144XL), and the CPLD drives the LCD inputs. By default, switch SW26 is used to interface the LCD module in RGB888 mode.

The other two LCD modes are RGB565, where each pixel is represented by two bytes, and 16-bit pass through, where all 16 bits of the PPI data bus are connected to the CPLD and passed to the LCD. To run RGB565 or 16-bit pass through mode, configure the processor's PPI appropriately. For more information about setting up the LCD interface mode, see [“Mode Switch \(SW26\)” on page 2-21](#).

When setting up the LCD module in 16-bit pass through mode, ensure PPI data signals PPID15–8 are not used elsewhere on the board because these processor pins are multiplexed with other functionality. Switches SW29 and SW30 disconnect the PPI data lines from the CPLD: turn SW29 all ON and SW30 positions 1 and 2 ON to disconnect PPID15–8 from the CPLD. See [“CPLD D8–13 Switch \(SW29\)” on page 2-22](#) and [“CPLD 14–15/DCE ENB Switch \(SW30\)” on page 2-22](#) for more information.

The LCD reset is selectable between the board's $\sim$ RESET signal and GPIO controllable signal HOSTWR#_LED1 (PG11). By default, the LCD reset is connected to the board's $\sim$ RESET signal. See [“LCD Reset Switch \(SW5\)” on page 2-13](#) for more information.

The verilog source code for the CPLD can be found in the reference resource zip file in the `<install_path>\Blackfin\Examples\ADSP-BF527 EZ-KIT Lite\XC95144XL_ConfigFiles` directory of VisualDSP++.

The LCD module can be disconnected from PPI by setting Enable2 to high. Refer to [“Mode Switch \(SW26\)” on page 2-21](#) for more information.

Touchscreen Interface

The AD7879-1 touchscreen controller (U37) is connected to the 2-wire interface (TWI) of the processor. Switch SW22 sets the default I²C address to 0101111. The ~AD7879_1_PENIRQ interrupt signal comes from one of the three signals connected to the SW24 switch. The default is LED0. To use two other signals for the touch pad interrupt, set SW24 appropriately. Refer to [“Touchpad INT Switch \(SW24\)” on page 2-20](#) for more information.

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to set up and access the touchscreen interface.

Keypad Interface

The ADP5520 keypad controller is used for keypad functions and connected to the TWI interface of the processor. By default, the keypad interrupt (~NINT) is set up to the ~KEYIRQ signal on the PF9 port pin. To use two other signals for the keypad interrupt, set SW25 accordingly. Refer to [“LCD/KPAD CTL Switch \(SW25\)” on page 2-20](#) for more information.

The I²C address of the keypad controller is 0110101. A red LED (LED8) can be used as a general-purpose status LED. LED8 is connected to the ILED pin of the ADP5520 controller (U35).

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the keypad interface.

Rotary Encoder Interface

The ADSP-BF527 processor has a built-in, up-down counter interface with support for a rotary encoder. The three-wire rotary encoder interface connects to the rotary switch (SW3) and expansion interface connector. The rotary encoder can be turned clockwise for the up function, counter clockwise for the down function, or can be used as a push button for clearing the counter.

The rotary switch is a two-bit quadrature (Gray code) counter with detent, meaning that both the down signal (CDG) and up signal (CUD) will toggle when the count register increases on a rotation to the right. Upon rotating to the left, both CDG and CUD will toggle, and the overall count decreases.

If the processor pins are needed for the expansion interface, disconnect the rotary encoder switch via the four-position rotary NAND enable switch (SW11). [For more information, see “Rotary NAND Enable Switch \(SW11\)” on page 2-16.](#)

An example program is included in the EZ-KIT Lite installation directory to demonstrate how to setup and access the rotary encoder interface.

Ethernet Interface

The ADSP-BF527 processor has an integrated Ethernet MAC with media independent interface (MII) and reduced media independent interface (RMII), which connects to an external PHY. The EZ-KIT Lite provides a SMSC LAN8700 RMII Ethernet PHY with Auto-MDIX, fully compliant with IEEE 802.2/802.2u standards. The SMSC LAN8700 chip supports 10BASE-T and 100BASE-TX operations. The part is attached gluelessly to the processor.

The Ethernet signals are shared with NAND flash. By default, Ethernet is turned off (SW1 OFF, OFF, ON, OFF). See [“ETH Enable Switch \(SW1\)” on](#)

[page 2-10](#) for more information. It is important not to run code that accesses the NAND while using the Ethernet interface.

The Ethernet mode is set by the SW9 switch and defaults to all capable, auto negotiation with settings OFF, OFF, OFF, ON. See [“ETH Mode Flash CS Switch \(SW9\)” on page 2-14](#) for more information.

The Ethernet chip is pre-loaded with a MAC address for the EZ-KIT Lite. The MAC address is stored in the public one-time programmable (OTP) memory of the processor and can be found on a sticker on the bottom side of the EZ-KIT Lite.

The PHY portion of the Ethernet chip is connected to a Pulse HX1188 (U26) magnetics, then to a standard RJ-45 Ethernet connector (J9). [For more information, see “Ethernet Connector \(J9\)” on page 2-30.](#)

Example programs are included in the EZ-KIT Lite installation directory to demonstrate how to use the Ethernet interface.

Audio Interface

The audio interface of the EZ-KIT Lite consists of an internal low-power stereo codec with an integrated headphone driver and its associated passive components. There are two inputs, stereo line in, and mono microphone as well as two outputs, headphone, and stereo line out. The codec has integrated stereo analog-to-digital converters (ADCs) and digital-to-analog converters (DACs) and requires minimal external circuitry.

The codec is connected to the ADSP-BF527 processor via the processor's serial port 0A (alternate). The SPORT0A port is disconnected from the codec by turning SW20 all OFF and SW27 positions 1 and 2 OFF. This allows SPORT0A to be used on the expansion interface.

The TFS0A signal is shared with the Ethernet and host connectors, as well as the RMIIMDINT# and HOSTCE# signals. SW21 allows this signal to be disconnected from the host connector by setting position 1 OFF, and STAMP

Audio Interface

connectors position 2 OFF. To connect signal TFS0A_RMIIMDINT#_HOSTCE# to either interface, turn the corresponding switch position ON. Refer to [“TFS0A/HOSTCE Enable Switch \(SW21\)” on page 2-19](#) for more information.

The control interface for the codec is selectable by the SW8 and SW19 switches between the TWI and SPI. By default, the board is in SPI mode, which is set up by the SW19 switch (ON, OFF, ON, OFF) and SW8 switch (positions 3 ON and 4 OFF). To select TWI mode, turn SW8 positions 3 OFF and 4 ON, as well as SW19 OFF, ON, OFF, ON. Refer to [“Mic/HP LPBK Audio Mode Switch \(SW8\)” on page 2-14](#) and [“SPI/TWI Switch \(SW19\)” on page 2-19](#) for more information.

Switch SW28 can be used to tie the LEFT_IN channel to LEFT_OUT and the RIGHT_IN channel to RIGHT_OUT, respectively. See [“Line In-Out LPBK Switch \(SW28\)” on page 2-21](#) for more information.

Mic gain is selectable through the SW4 switch, with values of 14 dB, 0 dB, or –6 dB, by turning ON position 1, 2, or 3 respectively. All other positions must be OFF to achieve the desired gain. Refer to [“MIC Gain Switch \(SW4\)” on page 2-12](#) for more information.

Microphone bias is provided through a low-noise reference voltage. A jumper on position 2 and 3 of JP6 connects the MICBIAS signal to the audio jack. Placing the jumper on positions 1 and 2 of JP6 connects the bias directly to the mic signal. Refer to [“MIC Select Jumper \(JP6\)” on page 2-23](#) for more information.

J7 and J8 are 3.5 mm connectors for the audio portion of the board. J7 connects the mic on the top portion and line-in on the bottom. J8 connects the headphone on the top portion and line-out on the bottom. If there is no 3.5 mm cable plugged into the bottom of J7 or J8, the LINEIN to LINOUT signals are looped back inside the connector, as long as SW23 positions 3 and 4 are ON.

For testing purposes, SW8 positions 1 and 2 allow the MICIN signal to be connected to either the left or right headphone. Do not connect both left

and right to the `MICIN` signal at the same time—only position 1 or 2 of `SW8` should be `ON` at the same time. Refer to [“Mic/HP LPBK Audio Mode Switch \(SW8\)” on page 2-14](#) for more information.

For more information, see [“Dual Audio Connectors \(J7–8\)” on page 2-30](#).

The EZ-KIT Lite is shipped with a headphone and multiple 3.5 mm cables, which allow you to run the example programs provided in the EZ-KIT Lite installation directory and learn about the audio interface.

USB OTG Interface

The ADSP-BF527 processor has a built-in, high-speed USB on-the-go (OTG) interface and integrated PHY. The interface is connected to a 24 MHz clock (`U12`), has a surge protector, and can be configured as a host or a device. When in device mode, the USB 5V regulator (`VR3`) and FET switch (`U28`) are turned `OFF`. When in host mode, the USB 5V regulator and FET are turned `ON` and can supply 5V at 500 mA.

The control mechanism to turn the two devices on and off are via the `PG13` flag pin of the processor and must be connected on the board to signal `USB_VRSEL` through switch `SW13`. By default, `USB_VRSEL` is held low or a logic 0 via a pull-down resistor, and both devices are turned off. To use host mode and provide 5V to a device, turn `SW13` position 2 `OFF` and position 3 `ON`. This disables push button 2. Note that signal `USB_VRSEL` is shared with `HOSTADDR`. By default, positions 2 and 3 of `SW13` are `ON` and `OFF`, which shut off the `VR3` regulator and `U28` FET. For more information, see [“GPIO Enable Switch \(SW13\)” on page 2-17](#).

The USB OTG interface has a mini-AB connector (`P1`); cables that plug into `P1` are shipped with the EZ-KIT Lite.

Use example programs in the EZ-KIT Lite installation directory to learn about the ADSP-BF527 processor’s device and host modes. For more

UART Interface

information about the USB interface, refer to the *ADSP-BF52x Blackfin Processor Hardware Reference*.

UART Interface

The ADSP-BF527 processor has two built-in universal asynchronous receiver transmitters (UARTs). UART1–0 share the processor pins with other peripherals on the EZ-KIT Lite.

UART1 has full RS-232 functionality via the Analog Devices 3.3V ADM3202 line driver and receiver (U25). The UART can be disconnected from the ADM3202 device by turning all positions of SW10 OFF. When using UART1, SW10 position 8 should be OFF. Turning this switch provides UART data loopback and should be ON only when running the POST program. If signals RTS and CTS are needed for flow control, the UART1CTS_LCDSPICS_Z port pin PF10 can be configured as a GPIO for CTS. The HWAIT port pin PG0 can be used for RTS by setting up the pin accordingly. See [“UART Enable Switch \(SW10\)” on page 2-15](#) for more information.

UART1 signals are connected to the ADM3202 device through the CPLD 14–15/DCE enable switch (SW30). To connect TX and RX signals, turn SW30 positions 3 and 4 ON. Additionally, a flow control can be added by connecting SW30 positions 5 and 6 ON. Refer to [“CPLD 14–15/DCE ENB Switch \(SW30\)” on page 2-22](#) for more information.

UART0 and UART1 are connected to the expansion interface. UART0 of the processor also is available via a STAMP connector (P5). See [“UART0 Connector \(P5\)” on page 2-31](#).

Example programs are included in the EZ-KIT Lite installation directory to demonstrate UART and RS-232 operations.

For more information about the UART interface, refer to the *ADSP-BF52x Blackfin Processor Hardware Reference*.

RTC Interface

The ADSP-BF527 processor has a real-time clock (RTC) and a watchdog timer. Typically the RTC interface is used to implement a real-time watchlog or life counter of the time elapsed since the last system reset. The EZ-KIT Lite is equipped with a Sanyo (CR2430) lithium coin 3V battery supplying 280 mAh. The 3V battery and 3.3V supply of the board are connected to the RTC power pin of the processor. When the EZ-KIT Lite is powered, the RTC circuit uses the board power to supply voltage to the RTC pin. When the EZ-KIT Lite is not powered, the RTC circuit uses the lithium battery to maintain the power to the RTC pin. After removing the mylar, the battery will last for about one year with the EZ-KIT Lite unpowered.

Example programs are included in the EZ-KIT Lite installation directory to demonstrate the RTC features.



The EZ-KIT Lite is shipped with a protective Mylar sheet placed between the coin battery and positive pin of the battery holder. Please remember to remove the Mylar sheet before trying to use RTC functionality of the processor.

For more information on the RTC and watchdog timer, refer to the *ADSP-BF52x Blackfin Processor Hardware Reference*.

LEDs and Push Buttons

The EZ-KIT Lite provides two push buttons and three LEDs for general-purpose I/O.

The three LEDs, labeled LED1 through LED3, are accessed via the PF8, PG11, and PG12 pins of the processor, respectively. For information on how to program the pins, refer to the *ADSP-BF52x Blackfin Processor Hardware Reference*.

JTAG Interface

LED0 is shared with a touchscreen controller interrupt and PPI data pin 8. LED1 is shared with the HOSTWR# signal, keypad controller interrupt, touchscreen controller interrupt, and LCD reset. LED2 is shared with the HOSTACK signal. The LED1 signal can be used for the LCD reset by turning SW5 positions 1 ON and 2 OFF. LED2 is shared with HOSTACK and PPI_SEL functionality. Refer to [“LCD Reset Switch \(SW5\)” on page 2-13](#), [“Touchpad INT Switch \(SW24\)” on page 2-20](#), [“LCD/KPAD CTL Switch \(SW25\)” on page 2-20](#), and [“GPIO Enable Switch \(SW13\)” on page 2-17](#) for configuration options.

The two general-purpose push buttons are labeled PB1 and PB2. The status of each individual button can be read through programmable flag inputs, PG0 and PG13. The flag reads 1 when a corresponding switch is being pressed. When the switch is released, the flag reads 0. A connection between the push button and processor input is established through the SW13 DIP switch.

Push button 1 is shared with HWAIT. Push button 2 is shared with HOSTADDR and also can be connected to USB_VRSEL by setting SW13 position 2 OFF and position 3 ON. USB_VRSEL allows the USB OTG to power an external USB device with 5V. See [“USB OTG Interface” on page 1-21](#) and [“GPIO Enable Switch \(SW13\)” on page 2-17](#) for more information.

An example program is included in the EZ-KIT Lite installation directory to demonstrate functionality of the LEDs and push buttons.

JTAG Interface

The JTAG emulation port allows an emulator to access the processor’s internal and external memory through a six-pin interface. The JTAG emulator port of the processor can be accessed via the on-board USB debug agent or with an external emulator via the JTAG connector (ZP4). When an external emulator connects to the board, the on-board USB debug agent is disabled. See [“JTAG Connector \(ZP4\)” on page 2-35](#) for more information.

For more information about emulators, contact Analog Devices or go to: <http://www.analog.com/processors/blackfin/evaluationDevelopment/crosscore/>.

Expansion Interface

The expansion interface consists of three 90-pin connectors (J1–3). These connectors contain a majority of the ADSP-BF527 processor's signals. For the pinout of the connectors, go to “[ADSP-BF527 EZ-KIT Lite Schematic](#)” on page B-1. The expansion interface allows an EZ-Extender or a custom-design daughter board to be tested across various hardware platforms. The mechanical dimensions of the expansion connectors can be obtained by contacting [Technical or Customer Support](#).

Analog Devices offers many EZ-Extender products. For more information about EZ-Extenders, visit the Analog Devices Web site at: <http://www.analog.com/processors/blackfin/evaluationDevelopment/crosscore/>.

Limits to current and interface speed must be taken into consideration when using the expansion interface. Current for the expansion interface is sourced from the EZ-KIT Lite; therefore, the current should be limited to 1A for both the 5V and 3.3V planes. If more current is required, then a separate power connector and a regulator must be designed on a daughter card. Additional circuitry can add extra loading to signals, decreasing their maximum effective speed.



Analog Devices does not support and is not responsible for the effects of additional circuitry.

Power Measurements

Several locations are provided for measuring the current draw from various power planes. Precision 0.05 ohm shunt resistors are available on the `VDDINT`, `VDDEXT`, and `VDDMEM` pins. For current draw measurements, the associated jumper (P14, P15, or P16) should be removed. Once the jumper is removed, voltage across the resistor can be measured using an oscilloscope. Once voltage is measured, current can be calculated by dividing the voltage by 0.05. For the highest accuracy, a differential probe should be used for measuring the voltage across the resistor.

For more information, see [“VDDINT Power Jumper \(P14\)”](#), [“VDDEXT Power Jumper \(P15\)”](#), and [“VDDMEM Power Jumper \(P16\)”](#) on [page 2-25](#).

Power-On-Self Test

The power-on-self program (POST) tests all EZ-KIT Lite peripherals, validates functionality, as well as connectivity to the processor. Once assembled, each EZ-KIT Lite is fully tested for an extended period of time with a POST. All boards are shipped with the POST pre-loaded into parallel flash (U5) and SPI flash (U8) memories. The POST is executed by resetting the board and pressing the proper push button(s). The POST also can be used for reference in a custom software design or hardware troubleshooting.

When running the POST, you may need to place switches and jumpers in specific test modes. In some instances, such as Ethernet, you may need to plug in an Ethernet loopback connector (provided with the EZ-KIT Lite) to run the POST. The user LEDs (LED1–3) convey whether the specific tests have passed or failed.

The source code for the POST program is included in the EZ-KIT Lite installation directory of VisualDSP++ along with the readme file, which describes how the board is configured to run a POST.

Example Programs

Example programs are provided with the ADSP-BF527 EZ-KIT Lite to demonstrate various capabilities of the product. The programs are installed with the VisualDSP++ software and can be found in the `<install_path>\Blackfin\Examples\ADSP-BF527 EZ-KIT Lite` directory. Refer to a readme file provided with each example for more information.

Background Telemetry Channel

The USB debug agent supports the background telemetry channel (BTC), which facilitates data exchange between VisualDSP++ and the processor without interrupting processor execution.

The BTC allows you to read and write data in real time while the processor continues to execute. For increased performance of the BTC, including faster reading and writing, please check our latest line of processor emulators at:

<http://www.analog.com/processors/blackfin/evaluationDevelopment/crosscore/>. For more information about BTC, see the online Help.

Reference Design Information

A reference design info package is available for download on the Analog Devices Web site. The package provides information on the design, layout, fabrication, and assembly of the EZ-KIT Lite and EZ-Board products.

Reference Design Information

The information can be found at:

<http://www.analog.com/en/evaluation-boards-kits/resources/embedded-processing-dsp/blackfin/index.html%20>.

2 ADSP-BF527 EZ-KIT LITE HARDWARE REFERENCE

This chapter describes the hardware design of the ADSP-BF527 EZ-KIT Lite board.

The following topics are covered.

- [“System Architecture” on page 2-2](#)
Describes the ADSP-BF527 EZ-KIT Lite board configuration and explains how the board components interface with the processor.
- [“Programmable Flags” on page 2-3](#)
Shows the locations and describes the programming flags (PFs).
- [“Push Buttons and Switches” on page 2-10](#)
Shows the locations and describes the on-board push buttons and switches.
- [“Jumpers” on page 2-23](#)
Shows the locations and describes the on-board configuration jumpers.
- [“LEDs” on page 2-26](#)
Shows the locations and describes the on-board LEDs.
- [“Connectors” on page 2-28](#)
Shows the locations and provides part numbers for the on-board connectors. In addition, the manufacturer and part number information is provided for the mating parts.

System Architecture

This section describes the processor's configuration on the EZ-KIT Lite board (Figure 2-1).

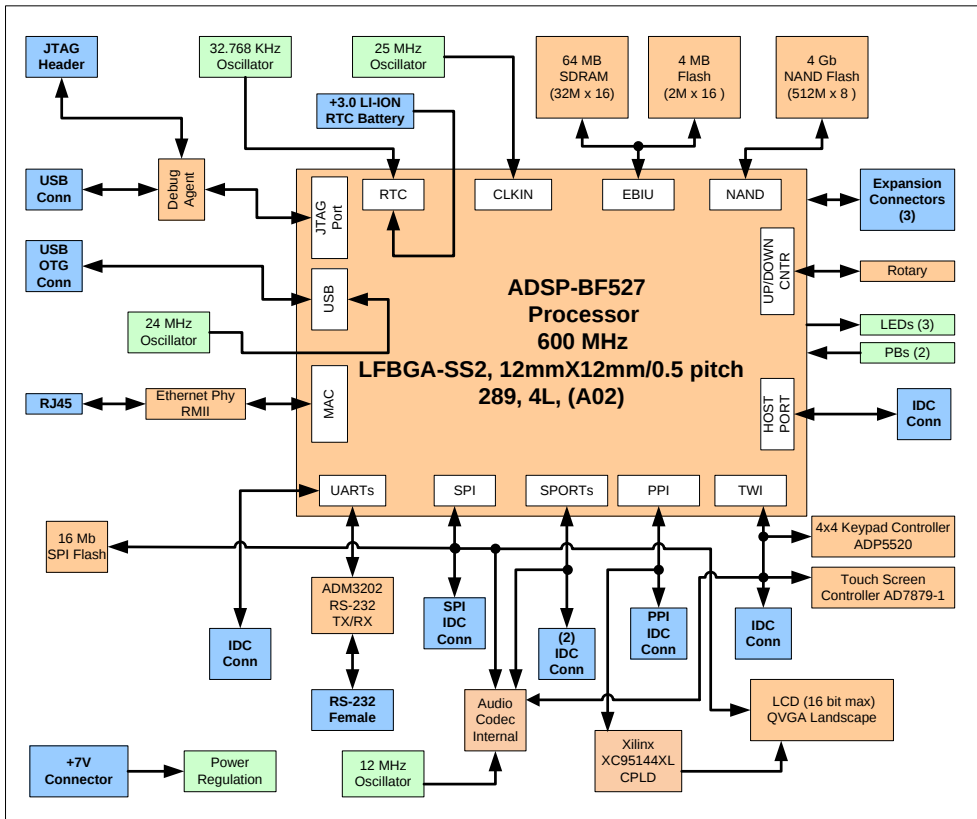


Figure 2-1. System Architecture

The EZ-KIT Lite is designed to demonstrate the ADSP-BF527 processor capabilities. The processor has an I/O voltage of 3.3V. The core voltage of the processor is controlled by the internal voltage regulator.

The core voltage and clock rate can be set on the fly by the processor. The input clock is 25 MHz. A 32.768 kHz crystal supplies the real-time clock (RTC) inputs of the processor. The default boot mode for the processor is external parallel flash boot. See [“Boot Mode Select Switch \(SW2\)” on page 2-11](#) for information on how to change the default boot mode.

Programmable Flags

The processor has 50 general-purpose input/output (GPIO) signals spread across four ports (PF, PG, PH, and PJ). The pins are multi-functional and depend on the ADSP-BF527 processor setup. The following tables show how the programmable flag pins are used on the EZ-KIT Lite.

- PF programmable flag pins in [Table 2-1](#)
- PG programmable flag pins in [Table 2-2](#)
- PH programmable flag pins in [Table 2-3](#)
- PJ programmable flag pins in [Table 2-4](#)

Table 2-1. PF Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PF0	PPID0/DROPRI/ND_D0A	Default: LCD via CPLD. Expansion interface via J1.72. PPI connector via P8.8.
PF1	PPID1/RFS0/ND_D1A	Default: LCD via CPLD. Expansion interface via J1.73. PPI connector via P8.9.
PF2	PPID2/RSCLK0/ND_D2	Default: LCD via CPLD. Expansion interface via J1.74. PPI connector via P8.10.
PF3	PPID3/DTOPRI/ND_D3A	Default: LCD via CPLD. Expansion interface via J1.75. PPI connector via P8.11.

Programmable Flags

Table 2-1. PF Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PF4	PPID4/TFS0/ND_D4A/ TACLK0	Default: LCD via CPLD. Expansion interface via J2.43. PPI connector via P8.12.
PF5	PPID5/TSCLK0/ND_D5A/ TACLK1	Default: LCD via CPLD. Expansion interface via J2.44. PPI connector via P8.13.
PF6	PPID6/DT0SEC/ND_D6A/ TACIO	Default: LCD via CPLD. Expansion interface via J2.45. PPI connector via P8.14.
PF7	PPID7/DROSEC/ND_D7A/ TACI1	Default: LCD via CPLD. Expansion interface via J2.46. PPI connector via P8.15.
PF8	PPID8/DR1PRI	Default: LED1. LCD via CPLD, SW29, and JP15. Touchscreen interrupt via SW24.1 and JP15. Expansion interface via J1.79, J2.29, and J2.47. Via a quick switch U30 and JP15 to the following connectors: SPORT0 P6.25, SPORT1 P7.8, SPI P9.14, TWI P10.10, and PPI P8.24.
PF9	PPID9/RSCLK1/SPISEL6#	Default: KEYIRQ# (U35) via SW25.4. LCD via CPLD and SW29. Expansion interface via J2.48 and J2.33. Via a quick switch U38 to SPORT1 connector P7.16 and PPI connector P8.17.
PF10	PPID10/PRFS1/SPISEL7#	Default: ~LCD_SPICS via SW25.1. LCD via CPLD and SW29. CTS UART1 U25 via SW10.3 and SW30. Expansion interface via J2.31 and J2.49. Via a quick switch U38 to SPORT1 connector P7.7 and PPI connector P8.18.
PF11	PPID11/TFS1/CZM	Default: CZM rotary (SW3) via SW11.3. LCD via CPLD and SW29. Expansion interface via J2.32 and J2.50. Via a quick switch U30 to PPI connector P8.19 and SPORT1 connector P7.11.

ADSP-BF527 EZ-KIT Lite Hardware Reference

Table 2-1. PF Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PF12	PPID12/DT1PRI/ SPISEL2#/CDG	Default: CDG rotary (SW3) via SW11.2. LCD via CPLD and SW29. Expansion interface via J2.30 and J2.51. Via a quick switch U31 to the following connectors: SPI P9.9, SPORT1 P7.14 and P7.19, PPI P8.20 and P8.26, SPORT0 P6.19.
PF13	PPID13/TSCLK1/ SPISEL3#/CUD	Default: CUD rotary (SW3) via SW11.1. LCD via CPLD and SW29. Expansion interface via J2.34 and J2.52. Via a quick switch U30 to the following connectors: SPORT1 P7.6 and P7.21, SPORT0 P6.21, PPI P8.21 and P8.25, SPI P9.12.
PF14	PPID14/DT1SEC/UART1TX	Default: UART1 (U25) TX via SW30. LCD via CPLD and SW30. Expansion interface via J2.28, J2.53, J2.55, J3.8. Via a quick switch U38 to SPORT1 connector P7.12, and PPI connector P8.22.
PF15	PPID15/DR1SEC/UART1RX/T ACI3	Default: UART1 (U25) RX via SW10.2 and SW30. LCD via CPLD and SW30. Expansion interface via J2.27, J2.54, J2.56, J3.7, SPORT1 connector P7.10, and PPI connector P8.23

Table 2-2. PG Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PG0	HWAIT	Default: PB1 via SW13.1. UART1 RTS (HWAIT) via SW10.1 and SW30, host connector P13.12, and expansion interface J1.84.
PG1	SPISS#/SPISEL1#	Default: SPI flash (U8) CS via SW9.4. LCD CS via SW25.2, expansion interface J2.11, via quick switch U31 to the following connectors: SPI P9.10, PPI P8.27, SPORT0 P6.17, and SPORT1 P7.17.

Programmable Flags

Table 2-2. PG Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PG2	SPISCK	Default: SPI flash (U8), codec (U2) via SW19, and LCD. Expansion interface J2.9, via quick switch U31 to the following connectors: SPI P9.8, SPORT0 P6.22, SPORT1 P7.22, and PPI P8.34.
PG3	SPIMISO/DROSECA	Default: SPI flash (U8) and LCD. Via a quick switch (U31) to the following connectors: SPI P9.6, SPORT0 P6.10 and P6.20, SPORT1 P7.20, and PPI P8.32, and expansion interface J2.12, J2.35.
PG4	SPIMOSI/DTOSECA	Default: SPI flash (U8), codec (U2) via SW19, and LCD. Via a quick switch (U31) to the following connectors: SPORT0 P6.12 and P6.18, SPORT1 P7.18, SPI P9.5, PPI P8.30, and expansion interface J2.10, J2.36.
PG5	TMR1/PPIFS2/TFS0A	Default: LCD via CPLD. PPI connector P8.33, expansion interface J2.24.
PG6	DTOPRIA/TMR2/PPIFS3	Default: SPORT0 audio codec (U2) via SW20.2. Via JP14 to PPI connector P8.29 and SPORT0 connector P6.14. Expansion interface via J2.38, J2.23.
PG7	TMR3/DROPRIA/UART0TX	Default: SPORT0 audio codec (U2) via SW20.3. Via a quick switch (U34) to the following connectors: UART0 P5.6, SPORT0 P6.8 and P6.28, SPORT1 P7.28, timers P11.6, and expansion interface J2.37, J3.6.
PG8	TMR4/RFS0A/UART0RX/TACI4	Default: SPORT0 audio codec (U2) via SW20.4. Via a quick switch (U34) to the following connectors: SPORT0 P6.7 and P6.30, SPORT1 P7.30, timers P11.8, UART0 P5.10, and expansion interface J2.39, J3.5.
PG9	TMR5/RSCLK0A/TACI5	Default: SPORT0 audio codec (U2) via SW23.2. Via a quick switch (U34) to the following connectors: SPORT0 P6.32 and P6.16, SPORT1 P7.32, timers P11.10, and expansion interface J2.41.
PG10	TMR6/TSCLK0A/TACI6	Default: SPORT0 audio codec (U2) via SW23.1. SPORT0 connector P6.6, expansion interface J2.42.

ADSP-BF527 EZ-KIT Lite Hardware Reference

Table 2-2. PG Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PG11	TMR7/HOST_WR#	Default: LED2. Keypad interrupt via SW25.5, touchscreen interrupt via SW24.2, LCD reset via SW5.1. Host connector P13.4, via a quick switch to the following connectors: SPORT0 P6.27, UART0 P5.3, SPORT1 P7.29, TWI P10.9, timers P11.3, SPI P9.15, and expansion interface J1.80.
PG12	DMAR1/UART1TXA/ HOST_ACK	Default: LED3. PPI_SEL via SW13.4, host connector P13.10, via a quick switch (U30) to the following connectors: UART0 P5.5, timers P11.5, TWI P10.12, SPORT0 P6.29, SPORT1 P7.31, SPI P9.16, and expansion interface J1.81.
PG13	DMAR0/UART1RXA/ HOST_ADDR/TAC12	Default: PB2 via SW13.2. OTG USB_VRSEL via SW13.3 ON and SW13.2 OFF, host connector P13.8, and expansion interface J1.85.
PG14	TSCCLKOA/MDC/HOST_RD#	Default: host connector P13.6. MDIO PHY (U14) via SW1.2, expansion interface J3.41.
PG15	TFS0A/MIIPHYINT#/ RMIIMDINT#/HOST_CE#	Default: SPORT0 audio codec (U2) via SW20.1. RMIIMDINT# PHY (U14), host connector P13.6, SPORT0 connector P6.11, and expansion interface J2.40, J3.31.

Table 2-3. PH Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PH0	ND_D0/MIICRS/ RMIICRS/DV/HOST_D0	Default: NAND Data 0 (U4). RMI carrier sense/receive data valid (U14.36), host connector data 0 (P13.31), and expansion interface (J3.40).
PH1	ND_D1/ERXER/HOST_D1	Default: NAND Data 1 (U4). PHY receive error (U14.21), host connector data 1 (P13.29), expansion interface (J3.39).

Programmable Flags

Table 2-3. PH Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PH2	ND_D2/MDIO/HOST_D2	Default: NAND Data 2 (U4). PHY management bus MDIO via SW1.1, host connector data 2 (P13.27), and expansion interface (J3.42).
PH3	ND_D3/ETXEN/HOST_D3	Default: NAND Data 3 (U4). PHY transmit enable (U14.6), host connector data 3 (P13.25), and expansion interface (J3.15).
PH4	ND_D4/MIITXCLK/ RMIIREF_CLK/ HOST_D4	Default: NAND Data 4 (U4). PHY RMII ref clock (U14.14) via SW1.3 OFF, oscillator output U24, host connector data 4 (P13.23), and expansion interface (J3.16).
PH5	ND_D5/ETXD0/HOST_D5	Default: NAND Data 5 (U4). PHY RMII transmit data 0 (U14.23), host connector data 5 (P13.21), and expansion interface (J3.11).
PH6	ND_D6/ERXD0/HOST_D6	Default: NAND Data 6 (U4). PHY RMII receive data 0 (U14.18), PHY mode via SW9.3, host connector data 6 (P13.19), and expansion interface (J3.33).
PH7	ND_D7/ETXD1/HOST_D7	Default: NAND Data 7 (U4). PHY RMII transmit data 1 (U14.24), host connector data 7 (P13.17), and expansion interface (J3.12).
PH8	SPISEL4#/ERXD1/ HOST_D8/TACLK2	Default: NAND Data 7 (U4). PHY RMII transmit data 1 (U14.24), keypad/touch-screen chip select via SW18.2, host connector data 8 (P13.17), and expansion interface (J3.12).
PH9	SPISEL5#/ETXD2/ HOST_D9/TACLK3	Default: SPI SEL5 audio codec U2. Host connector data 9 (P13.13), expansion interface (J3.13).
PH10	ND_CE#/_ERXD2/HOST_D10	Default: NAND chip enable via SW11.4 ON. Host connector data 10 (P13.17), expansion interface (J3.35).
PH11	ND_WE/ETXD3/HOST_D11	Default: NAND write enable (U4). Host connector data 11 (P13.9), expansion interface (J3.14).

ADSP-BF527 EZ-KIT Lite Hardware Reference

Table 2-3. PH Port Programmable Flag Connections (Cont'd)

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PH12	ND_RE/ERXD3/HOST_D12	Default: NAND output enable (U4). Host connector data 12 (P13.7), expansion interface (J3.36).
PH13	ND_BUSY/ERXCLK/HOST_D13	Default: NAND busy (U4). Host connector data 13 (P13.5), expansion interface (J3.38).
PH14	ND_CLE/ERXDV/HOST_D14	Default: NAND command latch enable (U4). Host connector data 14 (P13.3), expansion interface (J3.37).
PH15	ND_ALE/COL/HOST_D15	Default: NAND address latch enable (U4). Host connector data 15 (P13.1), expansion interface (J3.32).

Table 2-4. PJ Port Programmable Flag Connections

Processor Pin	Other Processor Function	EZ-KIT Lite Function
PJ0	PPIFS1/TMRO	Default: LCD via CPLD. PPI connector (P8.31), expansion interface (J2.25).
PJ1	PPICLK/TMRCLK	Default: LCD via CPLD. Output of switch (U20), PPI connector (P8.6), and expansion interface (J1.71).
PJ2	SCL	Default: touchscreen (U37). Codec via SW19.4, expansion interface (J2.57), the following connectors via a quick switch (U31): TWI (P10.5), PPI (P8.38), SPORT0 (P6.26), and SPORT1 (P7.26).
PJ3	SDA	Default: touchscreen (U37). Codec via SW19.4, expansion interface (J2.58), the following connectors via a quick switch (U31): TWI (P10.6), PPI (P8.36), SPORT0 (P6.24), and SPORT1 (P7.24).

Push Buttons and Switches

This section describes operation of the push buttons and switches. The push button and switch locations are shown in [Figure 2-2](#).

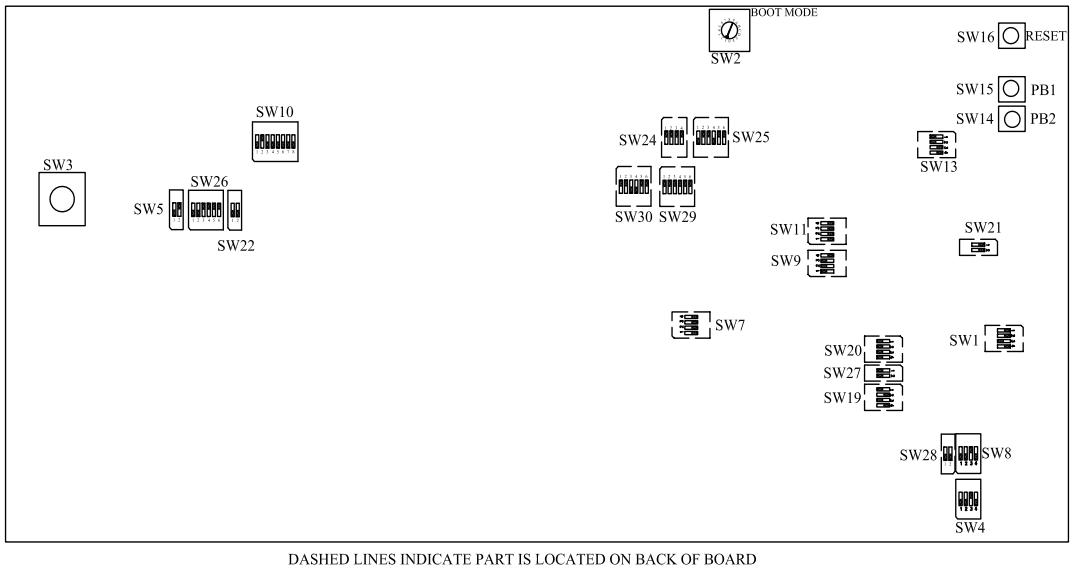


Figure 2-2. Push Button and Switch Locations

ETH Enable Switch (SW1)

The Ethernet enable switch (SW1) allows the Ethernet to operate. Ethernet and NAND flash share the same lines and cannot operate at the same time. By default, SW1 is OFF, OFF, ON, OFF (see [Table 2-5](#)). Ethernet is enabled by setting the switch to ON, ON, OFF, ON. SW1 positions 1 and 2 connect the management bus (MDIO and MDC). SW1 position 3 enables the

50 MHz RMII clock. SW1 position 4 holds the PHY in reset (set to OFF) or connects the PHY reset to the EZ-KIT Lite reset (set to ON).

Table 2-5. ETH Enable Switch (SW1)

SW1 Switch Setting	Ethernet Mode
OFF, OFF, ON, OFF	OFF (default)
ON, ON, OFF, ON	ON

Boot Mode Select Switch (SW2)

The rotary switch (SW2) determines the boot mode of the processor. [Table 2-6](#) shows the available boot mode settings. By default, the ADSP-BF527 processor boots from the on-board parallel flash memory.



The selected position of SW2 is marked by the notch down the entire rotating portion of the switch, not the small arrow.

Table 2-6. Boot Mode Select Switch (SW2)

SW2 Position	Processor Boot Mode
0	Reserved
1	Boot from 8-bit external flash memory (default)
2	Boot from 16-bit asynchronous FIFO
3	Boot from serial SPI memory
4	Boot from SPI host device
5	Boot from serial TWI memory
6	Boot from TWI host
7	Boot from UART0 host
8	Boot from UART1 host
9	Reserved
A	Boot from SDRAM

Push Buttons and Switches

Table 2-6. Boot Mode Select Switch (SW2) (Cont'd)

SW2 Position	Processor Boot Mode
B	Reserved
C	Boot from 8-bit NAND flash PORTF
D	Boot from 8-bit NAND flash PORTH
E	Boot from 16-bit host DMA
F	Boot from 8-bit host DMA

Rotary Encoder with Momentary Switch (SW3)

The rotary encoder (SW3) can be turned clockwise for an up count or counter-clockwise for a down count. The encoder also features a momentary switch, activated by pushing down the switch and setting the counter to zero. The rotary encoder is a two-bit quadrature (Gray code) encoder. Refer to the “Rotary Counter” section in the *ADSP-BF52x Hardware Reference Manual* for additional information about interfacing with the rotary encoder.

The rotary encoder can be disconnected from the processor by setting the rotary enable switch SW11 positions 1, 2 and 3 to OFF. See [“Rotary NAND Enable Switch \(SW11\)” on page 2-16](#) for more information.

MIC Gain Switch (SW4)

The microphone gain switch (SW4) sets the gain of the MIC signal, which is connected to the top 3.5 mm jack (J7). The gain can be set to 14 dB, 0 dB, or –6 dB by turning position 1, 2 or 3 of the switch ON (see [Table 2-7](#)). When the corresponding position for the desired gain is

ON, the remaining positions should be OFF. Refer to [“Audio Interface” on page 1-19](#) for more information about the audio codec.

Table 2-7. MIC Gain Switch (SW4)

Gain	SW4 Switch Settings
5 (14 dB)	ON, OFF, OFF, OFF
1 (0 dB)	OFF, ON, OFF, OFF
0.5 (–6 dB)	OFF, OFF, ON, OFF (default)
Unused	OFF, OFF, OFF, OFF

LCD Reset Switch (SW5)

The LCD reset switch (SW5) in default mode connects the general ~RESET line to the ~LCD_RESET line. By default, SW5.2 is ON. When SW5.1 is set to ON, ~LCD_RESET comes from HOSTWR#_LED1 (see [Table 2-8](#)).

Table 2-8. LCD Reset Switch (SW5)

SW5 Position (Default)	From	To	Function
1 (OFF)	Processor (U2, PG11)	LCD RESET	Resets the LCD through the processor's PG11 pin
2 (ON)	Main reset (U27)	LCD RESET	Reset the LCD through the main reset

Flash Enable Switch (SW7)

The flash enable switch (SW7) disconnects ~AMS signals from flash memory, allowing other devices to utilize the signals via the expansion interface. For

Push Buttons and Switches

each switch listed in [Table 2-9](#) that is turned OFF, the size of available flash memory is reduced by 1 MB.

Table 2-9. Flash Enable Switch (SW7)

SW7 Switch Position (Default)	Processor Signal
1 (ON)	~AMS0
2 (ON)	~AMS1
3 (ON)	~AMS2
4 (ON)	~AMS3

Mic/HP LPBK Audio Mode Switch (SW8)

The audio mode select switch SW8 places the EZ-KIT Lite in loopback mode to test signal/circuit continuity and functionality (see [“Power-On-Self Test” on page 1-26](#)).

SW8 positions 1 and 2 connect the MICIN signal to the headphone left and right outputs for audio loopback. Do not turn SW8 positions 1 and 2 ON at the same time.

SW8 positions 3 and 4 select the control interface for the audio codec. SW8 position 3 ON and 4 OFF select SPI interface, while position 3 OFF and position 4 ON select TWI mode. The SW8 default settings are OFF, OFF, ON, OFF. See [“SPI/TWI Switch \(SW19\)” on page 2-19](#) for more information.

ETH Mode Flash CS Switch (SW9)

The Ethernet mode flash CS switch (SW9) sets the bootstrapping options for the LAN8700 RMII PHY chip (U14). [Table 2-10](#) shows the SW9 default as well as the alternate switch settings.

SW9 position 4 disconnects SPISEL1 from the SPI flash chip (U8). Setting SW9 position 4 OFF is useful when using SPISEL1 on the expansion interface at connector J2 pin 11. By default, SW9 position 4 is ON.

Table 2-10. ETH Mode Flash CS Switch (SW9)

SW9 Switch Setting	MODE[2:0] Setting	Mode Definitions
OFF, OFF, OFF	111	All capable, auto negotiation (default)
OFF, OFF, ON	110	Power down mode
OFF, ON, OFF	101	Repeater mode, auto negotiation
OFF, ON, ON	100	100Base-TX half duplex advertised, auto negotiation
ON, OFF, OFF	011	100Base-TX full duplex
ON, OFF, ON	010	100Base-TX half duplex
ON, ON, OFF	001	10Base-T full duplex
ON, ON, ON	000	10Base-T half duplex

UART Enable Switch (SW10)

The UART enable switch (SW10) disconnects UART1 signals from the GPIO pins of the processor (see [Table 2-11](#)). When SW10 is OFF, its associated GPIO signals can be used for other functions. By default, SW10 is OFF, ON, OFF, OFF, OFF, OFF, OFF, OFF, OFF. Flow control is not implemented in POST programs, so SW10 positions 1 and 3 are OFF. Refer to the ADM3202 datasheet for more information about the UART interface.

Table 2-11. UART Enable Switch (SW10)

POS	From	To	Default	Alternate Function
SW10.1	HWAIT_PUSHBUTTON1 (PG0) (U2)	T2IN in U25	OFF	Ties URT1RTS to T2IN
SW10.2	UART1RX (PF15) (U2)	U25	ON	Disconnects UART1RX

Push Buttons and Switches

Table 2-11. UART Enable Switch (Cont'd)(SW10) (Cont'd)

POS	From	To	Default	Alternate Function
SW10.3	UART1CTS_LCDSPICS (PF10) (U2)	R2OUT in U25	OFF	CTS flow control signal
SW10.4	R2OUT	T2IN in U25	OFF	Loopback of CTS to RTS
SW10.5	R2OUT	SOFT_RESET	OFF	Soft resets the processor through UART
SW10.6	Pin 7 in J4	R2IN in U25	OFF	Ties pin 7 in J4 to R2IN
SW10.7	Pins 1, 4, 6 in J4	R2IN in U25	OFF	Ties pins 1, 4, 6 in J4 to R2IN
SW10.8	UART1TX	UART1RX	OFF	Loopback of TX to RX

Rotary NAND Enable Switch (SW11)

The rotary NAND enable switch (SW11) disconnects the rotary encoder signals from the GPIO pins of the processor. When SW11 is OFF, its associated GPIO signals can be used on the host interface (see [Table 2-12](#)). Position 4 of SW11 disconnects the chip enable for NAND flash memory (U4).

Table 2-12. Rotary NAND Enable Switch (SW11)

SW11 Position (Default)	From	To	Alternate Function/OFF Mode
1 (ON)	Encoder (SW3)	Processor (U2, PF13)	Expansion interface (J2.34, J2.52) STAMP buffer (U34)
2 (ON)	Encoder (SW3)	Processor (U2, PF12)	CS audio codec (U2), CS keypad/touch controller (U16), expansion interface (J2.30, J2.51), STAMP buffer (U30)
3 (ON)	Encoder (SW3)	Processor (U2, PF11)	Expansion interface (J2.32, J2.50), STAMP buffer (U34)
4 (ON)	Processor (U2, PH10)	NAND (U4)	Host connector (P13.11), expansion interface (J3.35)

GPIO Enable Switch (SW13)

The general-purpose input/output (GPIO) switch (SW13) disconnects the associated push buttons and LED circuits from the GPIO pins of the processor and allows the signals to be used for other functions. Depending on the switch configuration, the signals can be used as PPI clock select, keypad_busy, or OTG host mode 5V select (see [Table 2-13](#)).

Table 2-13. GPIO Enable Switch (SW13)

SW13 Position (Default)	From	To	Function
1 (ON)	Push button 1	Processor (U2, PG0)	ON (PB1), OFF (UART1 CTS U25, host connector P13.12, keypad busy SW13.8, expansion interface J1.84)
2 (ON)	Push button 2	Processor (U2, PG13)	ON (PB2), OFF (host connector P13.8, OTG voltage select SW13.7, expansion interface J1.85)
3 (OFF)	OTG PWR (VR3, U28)	Processor (U2, PG13)	OFF (host connector P13.8, expansion interface J1.85), ON (PB2 SW13.11, OTG power VR3, U28)
4 (OFF)	Processor (U2, PG12)	PPI CLK (U20)	OFF (LED2, host connector P13.10, expansion interface J1.81, STAMP buffer U34), ON (PPI CLK U20)

To select an on-board or external PPI clock through software, set SW13 position 4 ON. Drive the PG12 programmable flag to low (0) to connect an external expansion interface clock. Drive PG12 high to select the on-board PPI oscillator. By default, SW13 position 4 is OFF, and the PPI clock source is on-board.

The USB_VRSEL signal is used to provide 5V to a device connected over the USB OTG interface when running in host mode. Signal USB_VRSEL is connected by setting SW13 position 2 OFF and position 3 ON. Then the PG13 programmable flag pin of the processor can be used to control the 5V regulator (VR3). Refer to [“USB OTG Interface” on page 1-21](#) for more information.

Programmable Flag Push Buttons (SW14–15)

Two momentary push buttons (SW14–15) are provided for general-purpose user input. The push buttons are connected to the PG0 and PG13 GPIO pins of the processor. The push buttons are active high and, when pressed, send a high (1) to the processor. The GPIO enable switch (SW13) disconnects the push buttons from the corresponding PB signal. Refer to [“GPIO Enable Switch \(SW13\)” on page 2-17](#) for more information.

Reset Push Button (SW16)

The reset push button (SW16) resets the following ICs.

- Processor (U2), parallel flash (U5), PHY (U14) if SW1 position 4 is ON
- LCD (P12) if SW5 position 1 is OFF and 2 is ON
- CPLD (U34)

The reset push button does not reset the following ICs.

- SDRAM (U7), NAND flash (U4), SPI flash (U8)
- Audio codec (U2), keypad controller (U35), touchscreen controller (U37)
- UART1 (U25)

The reset push button does not reset the debug agent once it has been connected to a PC. The USB chip is not reset when the push button is pressed after the USB cable has been plugged in and communication with the PC has been initialized correctly. After USB communication has been initialized, the only way to reset the USB chip is by powering down the board.

SPI/TWI Switch (SW19)

The SPI/TWI switch (SW19) selects the control interface for the audio codec. By default, SW19 is ON, OFF, ON, OFF (SPI interface is selected). TWI is selected by setting SW19 to OFF, ON, OFF, ON. See “[Mic/HP LPBK Audio Mode Switch \(SW8\)](#)” on page 2-14 for more information on how to set up the audio mode.

SPORT0A ENBL Switches (SW20 and SW27)

The SPORT0A enable switches (SW20 and SW27) connect the SPORT0A interface of the processor to the audio codec. When SPORT0A is needed at the expansion interface, turn SW20, SW27.1, and SW27.2 all OFF. By default, the switches are all ON.

TFS0A/HOSTCE Enable Switch (SW21)

The TFS0A/HOSTCE enable switch (SW21) disconnects the PG15 programmable flag signal TFS0A_RMIIMDINT#_HOSTCE# from SPORT0 (position 1) connector P6 pin 11 and host connector (position 2) P13 pin 6. By default, SW21 is OFF, OFF.

Touch ADD Switch (SW22)

The touchscreen address switch (SW22) sets the I²C address of the AD7879-1 controller (U37) as shown in [Table 2-14](#).

Table 2-14. AD7879-1 (U37) I²C Address Options

SW22.1 Setting	SW22.2 Setting	I ² C Address
ON	ON	0101 100
ON	OFF	0101 101

Push Buttons and Switches

Table 2-14. AD7879-1 (U37) I²C Address Options (Cont'd)

SW22.1 Setting	SW22.2 Setting	I ² C Address
OFF	ON	0101 110
OFF	OFF	0101 111 (default)

Touchpad INT Switch (SW24)

The touchpad interrupt switch (SW24) selects a GPIO signal as the AD7879-1 controller's (U37) interrupt signal. The signal options are:

- LED0 (PF8) on position 1
- HOSTWR#_LED1 (PG11) on position 2
- SPISEL5#_HOSTD9 (PH9) on position 3

Position 4 is not connected to any signals. By default, SW24 is ON, OFF, OFF, OFF.

LCD/KPAD CTL Switch (SW25)

The LCD/keypad control switch (SW25) selects the LCD SPI chip select and interrupt line signals for the ADP5520 keypad controller (U35).

The signal options for the LCD SPI chip select are:

- UART1CTS_LCDSPICS (PF10) on position 1
- ~SPISEL1 (PG1) on position 2
- SPISEL5#_HOSTD9 (PH9) on position 3.

The signal options for the keypad interrupt are:

- KEYIRQ# (PF9) on position 4
- HOSTWR#_LED1 (PG11) on position 5
- SPISEL5#_HOSTD9 (PH9) on position 6.

By default, SW25 is ON, OFF, OFF, ON, OFF, OFF.



Check other board settings before making a selection for this switch. Many signals are multiplexed with other functions and may cause a conflict if not handled appropriately.

Mode Switch (SW26)

The mode switch (SW26) selects the mode between the LCD and CPLD interfaces.

Table 2-15. LCD Mode Interface Select Switch (SW26)

SW26 Positions 2, 1	Mode Definition
ON, ON	16-bit PPI pass through
ON, OFF	16-bit PPI pass through
OFF, ON	RGB565 input mMode 16BPP
OFF, OFF	RGB888 input mode 24BPP (default)

SW26 positions 3, 4, and 5 are not used and available for future use. SW26 position 6 enables a PPI data buffer between the processor and LCD (active low). By default, SW26 is OFF, OFF, ON, ON, ON, ON.

Line In-Out LPBK Switch (SW28)

The line in/out loopback switch (SW28) disconnects LINEIN audio signals from LINEOUT (the signals are no longer looped back). The loopback also

Push Buttons and Switches

can be broken by plugging a cable into the bottom of the J7 or J8 connector. SW28 is ON when a POST example is running.

CPLD D8–13 Switch (SW29)

The CPLD D8–13 switch (SW29) connects PPI data lines 8–13 to the CPLD. By default, SW29 is all OFF.

CPLD 14–15/DCE ENB Switch (SW30)

The CPLD 14–15/DCE enable switch (SW30) disconnects the processor's signals from the EZ-KIT Lite's peripherals:

- Positions 1 and 2 disconnect PPI data lines 14-15 from the CPLD.
- Positions 3 and 4 disconnect UART1TX and UART1RX signals from the DCE (UART) interface.
- Positions 5 and 6 disconnect flow control signals from the DCE (UART) interface.

By default, SW30 is OFF, OFF, ON, ON, OFF, OFF.

Jumpers

This section describes functionality of the configuration jumpers. [Figure 2-3](#) shows the jumper locations.

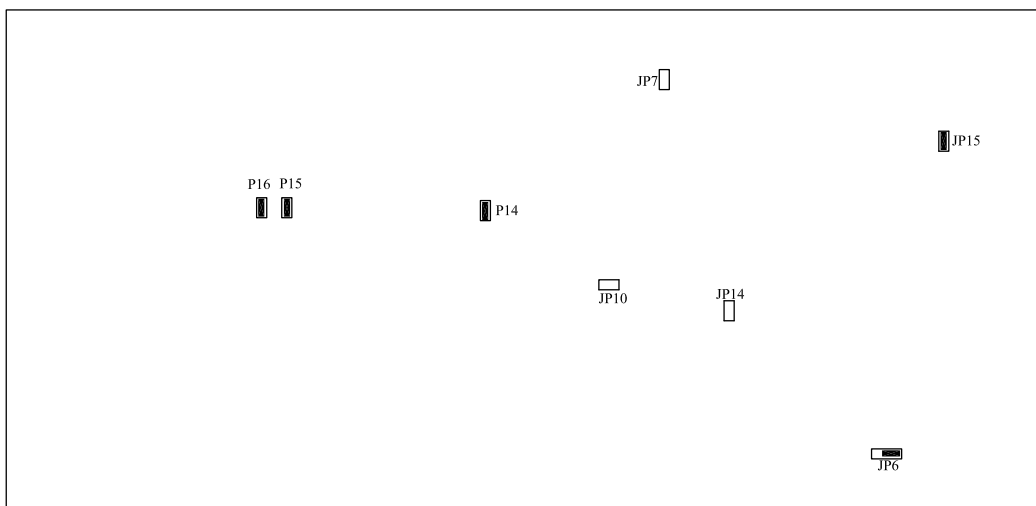


Figure 2-3. Configuration Jumper Locations

MIC Select Jumper (JP6)

The MIC select jumper (JP6) connects the MICBIAS signal to the MICIN (JP6 on 1 and 2) or the 3.5 mm connector J7 pin 3 (JP6 on 2 and 3). By default, JP6 is installed on 2 and 3.

STAMP Enable Jumper (JP7)

STAMP connectors have a number of nets connected by enabling quick switches at locations U30, U31, and U38. When installed, the STAMP enable jumper (JP7) enables the quick switches. [Table 2-16](#) lists the sig-

Jumpers

nals that are connected when JP7 is installed. By default, JP7 is uninstalled.

Table 2-16. STAMP Enable Jumper (JP7)

STAMP Signals Connected through Quick Switches U30–31, U38	
SCL	DROPRIA
SDA	RFS0A
SPISCK	CZM
SPISEL1	CUD
SPISEL2#_CDG	LED0
SPIMISO	HOSTWR#_LED1
SPIMOSI	HOSTACK_LED2
RSCLK0A	KEYIRQ#, UART1CTS_LCDSPICS, UART1TX

STP ENB Enable Jumper (JP14)

The stamp enable jumper (JP14) connects the DTOPRIA_PPIFS3 signal to the STAMP interface connectors. By default, JP14 is uninstalled.

LED0 OFF Jumper (JP15)

The LED0 OFF jumper (JP15) disconnects the LED0 signal from the following switches: SW24, SW29, and a quick switch U38.

VDDINT Power Jumper (P14)

The VDDINT power jumper (P14) is used to measure the core voltage and current supplied to the processor core. By default, P14 is ON, and the power flows through the two-pin IDC header. To measure power, remove the jumper and measure voltage across the 0.05 ohm resistor. Once voltage is

measured, the power can be calculated. For more information, refer to [“Power Measurements” on page 1-26](#).

VDDEXT Power Jumper (P15)

The `VDDEXT` power jumper (P15) is used to measure the processor's I/O voltage and current. By default, JP15 is ON, and the power flows through the two-pin IDC header. To measure power, remove the jumper and measure voltage across the 0.05 ohm resistor. Once voltage is measured, the power can be calculated.

VDDMEM Power Jumper (P16)

The `VDDMEM` power jumper (P16) is used to measure the voltage and current supplied to the memory interface of the processor. By default, P16 is ON, and the power flows through the two-pin IDC header. To measure power, remove the jumper and measure voltage across the 0.05 ohm resistor. Once voltage is measured, the power can be calculated.

LEDs

This section describes the on-board LEDs. [Figure 2-3](#) shows the LED locations.

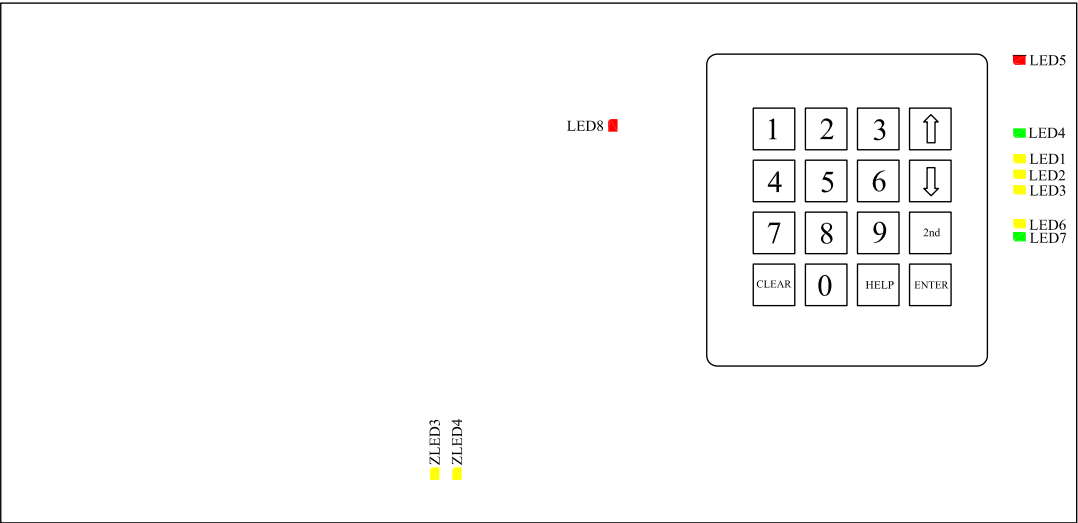


Figure 2-4. LED Locations

User LEDs (LED1–3)

Three LEDs are connected to the three general-purpose I/O pins of the processor (see [Table 2-17](#)). The LEDs are active high and are lit by writing a 1 to the correct PF signal.

Table 2-17. User LEDs

LED Reference Designator	Processor Programmable Flag Pin
LED1	PF8
LED2	PG11
LED3	PG12

Power LED (LED4)

When LED4 is lit (green), it indicates that power is being properly supplied to the board.

Reset LED (LED5)

When LED5 is lit, it indicates that the master reset of all major ICs is active. The reset LED is controlled by the Analog Devices ADM708 supervisory reset circuit. You can assert the reset push button (SW16) to assert a master reset and to activate LED5. [For more information, see “Reset Push Button \(SW16\)” on page 2-18.](#)

Ethernet LEDs (LED6–7)

When LED6 is lit solid, it indicates that the SMSC LAN8700 chip (U14) detects a valid link. When transmit or receive activity is sensed, LED7 flashes as an activity indicator. For more information about LEDs, refer to the LAN8700 chip datasheet provided by the product manufacturer.

Keypad Current Sink LED (LED8)

LED8 can be used as a keypad current sink LED. It is programmable up to 14 mA and can be turned on and off. The sink current can be set up using LED1_CURRENT in register 0 x 14. The LED sink can be enabled with the LED1_EN register 0 x 11 in the ADP5520 keypad controller (U35). For details, refer to the ADP5520 datasheet.

Connectors

This section describes connector functionality and provides information about mating connectors. The connector locations are shown in [Figure 2-5](#).

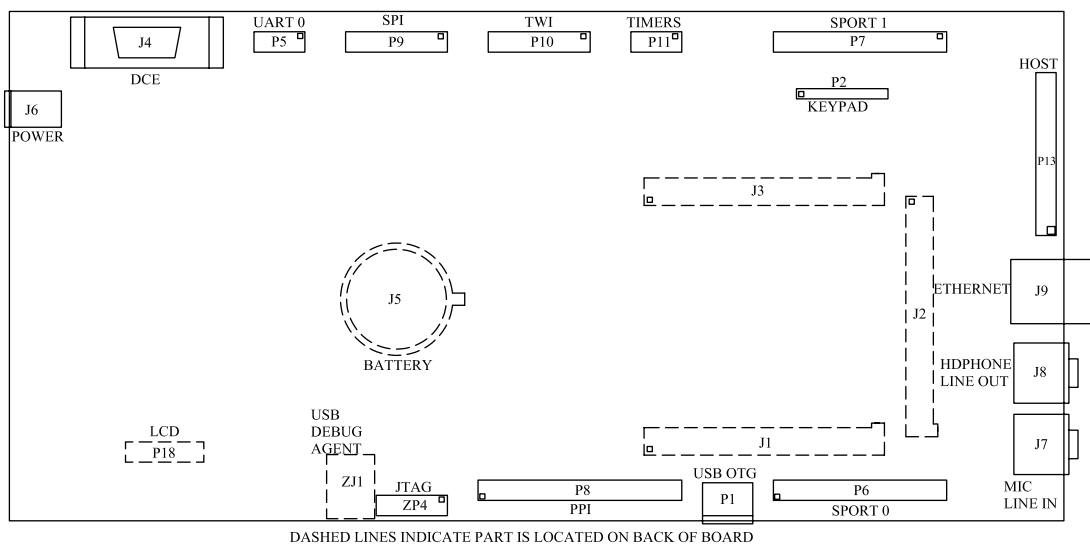


Figure 2-5. Connector Locations

Expansion Interface Connectors (J1–3)

Three board-to-board connector footprints provide signals for most of the processor's peripheral interfaces. The connectors are located at the bottom of the board. For more information, see [“Expansion Interface” on page 1-25](#). For availability and pricing of the J1–3 connectors, contact Samtec.

ADSP-BF527 EZ-KIT Lite Hardware Reference

Part Description	Manufacturer	Part Number
90-position 0.05" spacing, SMT	SAMTEC	SFC-145-T2-F-D-A
Mating Connector		
90-position 0.05" spacing (through hole)	SAMTEC	TFM-145-x1 series
90-position 0.05" spacing (surface mount)	SAMTEC	TFM-145-x2 series
90-position 0.05" spacing (low cost)	SAMTEC	TFC-145 series

DCE (RS-232) Connector (J4)

Part Description	Manufacturer	Part Number
DB9, female, vertical mount	NORCOMP	191-009-213-L-571
Mating Cable		
2m female-to-female cable	DIGI-KEY	AE1020-ND

Battery Holder (J5)

Part Description	Manufacturer	Part Number
24 mm battery holder	KEYSTONE	105
Mating Battery (shipped with EZ-KIT Lite)		
3V 280MAH 24 mm LI-COIN	SANYO	CR2430

Connectors

Power Connector (J6)

The power connector (J6) provides all of the power necessary to operate the EZ-KIT Lite board.

Part Description	Manufacturer	Part Number
2.5 mm power jack	SWITCHCRAFT	RAPC712X
Mating Power Supply (shipped with EZ-KIT Lite)		
7.0VDC@2.14A power supply	CUI INC	DMS070214-P6P-SZ

Dual Audio Connectors (J7–8)

Part Description	Manufacturer	Part Number
3.5 mm dual stereo jack	SWITCHCRAFT	35RAPC7JS
Mating Cable (shipped with EZ-KIT Lite)		
3.5 mm male/male 6' cable	RANDOM	10A3-01106
Mating Headphone (shipped with EZ-KIT Lite)		
3.5 mm stereo headphones	KOSS	151225 UR5

Ethernet Connector (J9)

Part Description	Manufacturer	Part Number
RJ-45 Ethernet jack	STEWART	SS-6488-NF
Mating Cable (shipped with EZ-KIT Lite)		
Cat 5E patch cable	RANDOM	PC10/100T-007

USB OTG Connector (P1)

The pinout of the P1 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
USB 5-pin mini AB	MOLEX	56579-0576
Mating Cables (shipped with EZ-KIT Lite)		
5-in-1 USB 2.0 cable	JO-DAN INTERNAT	GXQU-06

Keypad Connector (P2)

Part Description	Manufacturer	Part Number
IDC header female	SAMTEC	SSW-109-01-TM-S
Mating Keypad (shipped with EZ-KIT Lite)		
4 x 4 keypad	ACT COMPONENTS	ACT-07-30008-000-R

UART0 Connector (P5)

The pinout of the P5 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-410HLF
Mating Connector		
IDC socket	DIGI-KEY	S4205-ND

Connectors

SPORT0 Connector (P6)

The pinout of the P6 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-434HLF
Mating Connector		
IDC socket	DIGI-KEY	S4217-ND

SPORT1 Connector (P7)

The pinout of the P7 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-434HLF
Mating Connector		
IDC socket	DIGI-KEY	S4217-ND

PPI Connector (P8)

The pinout of the P8 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-440HLF
Mating Connector		
IDC socket	DIGI-KEY	S4220-ND

SPI Connector (P9)

The pinout of the P9 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-420HLF
Mating Connector		
IDC socket	DIGI-KEY	S4210-ND

TWI Connector (P10)

The pinout of the P10 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-420HLF
Mating Connector		
IDC socket	DIGI-KEY	S4210-ND

TIMERS Connector (P11)

The pinout of the P11 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-410HLF
Mating Connector		
IDC socket	DIGI-KEY	S4205-ND

Connectors

Host Interface Connector (P13)

The pinout of the P13 connector can be found in [“ADSP-BF527 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	SAMTEC	TSW-116-26-T-D
Mating Connector		
IDC socket	SAMTEC	TSW-116-01-T-D

CPLD JTAG Connector (P17)

The CPLD JTAG connector (P17) is not populated; CPLD code should not be altered for LCD operations.

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-410HLF
Mating Connector		
IDC socket	DIGI-KEY	S4205-ND

LCD Data Connector (P18)

Part Description	Manufacturer	Part Number
FPC 67PIN CON063	KYOCERA ELCO	046281267212846+
Mating LCD Display Module (shipped with EZ-KIT Lite)		
3.5" TFT LCD with touchscreen	Sharp	LQ035Q1DH02

USB Debug Agent Connector (ZJ1)

The USB debug agent connector (ZJ1) is the connecting point for the JTAG USB debug agent interface. The JTAG header (ZP4) should not be used whenever ZJ1 and its mating cable are used to communicate to the processor via VisualDSP++.

JTAG Connector (ZP4)

The JTAG header (ZP4) is the connecting point for a JTAG in-circuit emulator pod. When an emulator connects to the JTAG header, the USB debug interface is disabled.

Pin 3 is missing to provide keying. Pin 3 in the mating connector should have a plug.

When using an emulator with the EZ-KIT Lite board, follow the connection instructions provided with the emulator.

A ADSP-BF527 EZ-KIT LITE BILL OF MATERIALS

The bill of materials corresponds to “[ADSP-BF527 EZ-KIT Lite Schematic](#)” on page B-1.

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
1	1	74LVC14A SOIC14	U17	TI	74LVC14AD
2	1	IDT74FCT324 4APY SSOP20	U22	IDT	IDT74FCT3244APYG
3	1	SN74AHC1G0 0 SOT23-5	U6	TI	SN74AHC1G00DBVR
4	1	32.768KHZ OSC008	U1	EPSON	MC-156-32.7680KA- A0:ROHS
5	1	25MHZ OSC003	U3	EPSON	SG-8002CA MP
6	5	SN74LVC1G08 SOT23-5	U9-11,U29,U36	TI	SN74LVC1G08DBVR
7	1	FDS9431A SOIC8	U21	FAIRCHILD	FDS9431A
8	1	MT48LC32M1 6A2TG-75 TSOP54	U7	MICRON	MT48LC32M16A2P-75
9	2	SI4411DY SO-8	U18,U23	VISHAY	Si4411DY-T1-E3
10	1	HX1188 ICS007	U26	DIGI-KEY	553-1340-ND
11	1	24MHZ OSC003	U12	EPSON	SG-8002CA-MP

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
12	1	LAN8700 QFN36	U14	SMSC	LAN8700C-AEZG
13	1	BF527 M25P16 "U8"	U8	NUMONYX	M25P16-VMW6G
14	1	BF527 M29W320EB "U5"	U5	NUMONYX	M29W320EB70ZE6E
15	1	NAND04 TSOP48	U4	NUMONYX	NAND04GW3B2BN6E
16	1	MIC2025-1 SOIC8	U28	DIGI-KEY	576-1057-ND
17	1	12MHZ OSC003	U13	EPSON	SG-8002CA-MP
18	3	74CBTLV3244 TSSOP20	U30-31,U38	IDT	IDT74CBTLV3244PGG
19	1	15MHZ OSC003	U19	EPSON	SG-8002CA-MPT
20	1	BF527 XC95144XL U34	U34	XILINX	XC95144XL-10TQ100C
21	1	50MHZ OSC003	U24	DIGI-KEY	SG-8002CA-PCB-ND(5 0.000M)
22	1	ADM708SARZ SOIC8	U27	ANALOG DEVICES	ADM708SARZ
23	2	ADP3336ARM Z MSOP8	VR3-4	ANALOG DEVICES	ADP3336ARMZ-REEL7
24	1	ADG752BRTZ SOT23-6	U20	ANALOG DEVICES	ADG752BRTZ-REEL
25	1	ADM3202ARN Z SOIC16	U25	ANALOG DEVICES	ADM3202ARNZ
26	1	ADSPBF527KB CZENG C1 MBGA28	U2	ANALOG DEVICES	ADSP-BF527KBCZ- 6C2

ADSP-BF527 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
27	2	ADP1864AUJZ SOT23-6	VR1-2	ANALOG DEVICES	ADP1864AUJZ-R7
28	1	ADP5520 LFCSP_VQ24	U35	ANALOG DEVICES	ADP5520ACPZ-RL
29	1	AD7879-1 LFCSP16	U37	ANALOG DEVICES	AD7879-1ACPZ-RL
30	1	ADP1613 MSOP8	VR5	ANALOG DEVICES	ADP1613ARMZ-R7
31	1	PWR 2.5MM_JACK CON005	J6	SWITCH- CRAFT	RAPC712X
32	3	.05 45X2 CON019	J1-3	SAMTEC	SFC-145-T2-F-D-A
33	1	DIP8 SWT016	SW10	C&K	TDA08H0SB1
34	4	DIP6 SWT017	SW25-26,SW29-30	CTS	218-6LPST
35	10	DIP4 SWT018	SW1,SW4,SW7-9, SW11,SW13,SW19-20, SW24	ITT	TDA04HOSB1
36	1	DB9 9PIN CON038	J4	NORCOMP	191-009-213-L-571
37	5	DIP2 SWT020	SW5,SW21-22,SW27- 28	C&K	CKN9064-ND
38	2	IDC 2X1 IDC2X1	JP7,JP10	FCI	90726-402HLF
39	3	IDC 2X1 IDC2X1	P14-16	FCI	90726-402HLF
40	1	IDC 3X1 IDC3X1	JP6	FCI	90726-403HLF
41	2	IDC 5X2 IDC5X2	P5,P11	FCI	68737-410HLF
42	2	IDC 10X2 IDC10X2	P9-10	BURG-FCI	54102-T08-10LF

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
43	2	IDC 17X2 IDC17X2	P6-7	BURG-FCI	54102-T08-17LF
44	1	IDC 20X2 IDC20X2	P8	BURG-FCI	54102-T08-20LF
45	4	IDC 2PIN_JUMPER _SHORT	SJ7-10	DIGI-KEY	S9001-ND
46	1	5A RESETABLE FUS005	F2	MOUSER	650-RGEF500
47	1	ROTARY SWT023	SW2	DIGI-KEY	563-1047-ND
48	1	ROTARY_ENC ODER SWT022	SW3	CTS	290UAB0R201B2
49	1	IDC 16x2 IDC16x2	P13	SAMTEC	TSW-116-26-T-D
50	1	USB_MINI-AB 5PIN CON052	P1	MOLEX	56579-0576
51	1	RJ45 8PIN CON_RJ45_12 P	J9	DIGI-KEY	380-1022-ND
52	3	MOMEN- TARY SWT024	SW14-16	PANASONIC	EVQ-Q2K03W
53	1	IDC 9X1 IDC9X1	P2	SAMTEC	SSW-109-01-TM-S
54	1	BATT_HOLDE R 24MM CON054	J5	KEYSTONE ELEC	105
55	1	FPC 67PIN CON063	P18	KYOCERA ELCO	046281267212846+

ADSP-BF527 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
56	2	3.5MM DUAL_STERE O CON066	J7-8	SWITCH- CRAFT	35RAPC7JS
57	1	IDC 2PIN_JUMPER _SHORT	SJ13	DIGI KEY	3M9414-ND
58	2	IDC 2X1 IDC2X1_2MM	JP14-15	SAMTEC	TMM-101-01-T-D
59	4	YELLOW LED001	LED1-3,LED6	DIGI-KEY	P512TR-ND
60	1	22PF 50V 5% 0805	C307	AVX	08055A220JAT
61	6	0.22UF 25V 10% 0805	C112,C283-287	AVX	08053C224KAT2A
62	1	0.1UF 50V 10% 0805	C277	AVX	08055C104KAT
63	4	10K 1/10W 5% 0805	R319-322	VISHAY	CRCW080510K0JNEA
64	2	100 1/10W 5% 0805	R122,R124	VISHAY	CRCW0805100RJNEA
65	15	600 100MHZ 200MA 0603	FER2-16	DIGI-KEY	490-1014-2-ND
66	3	600 100MHZ 500MA 1206	FER1,FER19-20	STEWART	HZ1206B601R-10
67	5	1UF 16V 10% 0805	C92,C144,C148,C159, C178	KEMET	C0805C105K4RAC TU
68	1	10 1/10W 5% 0805	R64	VISHAY	CRCW080510R0FKEA
69	2	10UF 16V 20% CAP002	CT5,CT8	PANASONIC	EEE1CA100SR
70	1	10UH 20% IND001	L1	TDK	445-2014-1-ND

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
71	2	0 1/10W 5% 0805	R58,R188	VISHAY	CRCW08050000Z0EA
72	1	190 100MHZ 5A FER002	FER17	MURATA	DLW5BSN191SQ2
73	2	1A ZHCS1000 SOT23-312	D7,D9	ZETEX	ZHCS1000TA
74	4	1UF 10V 10% 0805	C164-165,C302-303	AVX	0805ZC105KAT2A
75	11	10UF 6.3V 10% 0805	C7,C22,C33,C43,C52, C59,C68,C99,C101- 102,C186	AVX	08056D106KAT2A
76	2	4.7UF 6.3V 10% 0805	C143,C171	AVX	08056D475KAT2A
77	48	0.1UF 10V 10% 0402	C12-19,C27-30,C38- 41,C47-50,C56-57, C64-66,C78,C81,C83, C88,C98,C100,C103, C105,C111,C132, C135-136,C146,C157- 158,C160-161,C249, C280,C300-301,C305, C308	AVX	0402ZD104KAT2A
78	76	0.01UF 16V 10% 0402	C2,C4-6,C8-11,C20- 21,C23-26,C31-32, C34-37,C42,C44-46, C51,C53-55,C58,C60- 63,C67,C69-77,C79- 80,C82,C84-87,C90- 91,C93,C97,C116-117, C121-127,C137-138, C155-156,C163,C166- 168,C187-188,C248, C250,C306	AVX	0402YC103KAT2A

ADSP-BF527 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
79	69	10K 1/16W 5% 0402	R2-3,R11-14,R16-22, R24-27,R34,R53-55, R59,R65,R69-70,R73-76,R89,R91,R104-105, R107,R118-121,R125-126,R129-131,R140, R144,R157-158,R160, R164,R166,R169,R176-178,R196,R198,R213, R305,R318,R324-325, R329,R332-333,R335, R342-343,R345,R351	VISHAY	CRCW040210K0FKED
80	2	4.7K 1/16W 5% 0402	R23,R212	VISHAY	CRCW04024K70JNED
81	12	0 1/16W 5% 0402	R6-7,R110,R116,R149, R172,R192,R215,R302, R310,R336-337	PANASONIC	ERJ-2GE0R00X
82	2	1.2K 1/16W 5% 0402	R87-88	PANASONIC	ERJ-2GEJ122X
83	3	22 1/16W 5% 0402	R193-195	PANASONIC	ERJ-2GEJ220X
84	17	33 1/16W 5% 0402	R1,R8-10,R31,R46, R139,R167,R311,R344, R346-347,R350,R352-353,R356-357	VISHAY	CRCW040233R0JNEA
85	2	18PF 50V 5% 0805	C1,C3	AVX	08055A180JAT2A
86	3	100UF 10V 10% C	CT6,CT9-10	AVX	TPSC107K010R0075
87	1	150UF 10V 10% D	CT16	AVX	TPSD157K010R0050
88	10	2.2UF 10V 10% 0805	C288-290,C293-299	AVX	0805ZD225KAT2A
89	1	64.9K 1/10W 1% 0805	R145	VISHAY	CRCW080564K9FKEA

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
90	1	210.0K 1/4W 1% 0805	R146	VISHAY	CRCW0805210KFKEA
91	2	1.5K 1/10W 5% 0603	R71-72	PANASONIC	ERJ-3GEYJ152V
92	3	0.1UF 16V 10% 0603	C169,C273-274	AVX	0603YC104KAT2A
93	3	1UF 16V 10% 0603	C96,C104,C109	KEMET	C0603C105K4PACTU
94	2	68PF 50V 5% 0603	C141,C183	AVX	06035A680JAT2A
95	1	4.7UF 6.3V 20% 0603	C131	PANASONIC	ECJ-1VB0J475M
96	2	470PF 50V 5% 0603	C140,C182	AVX	06033A471JAT2A
97	3	220UF 6.3V 20% D2E	CT1,CT7,CT11	SANYO	10TPE220ML
98	2	10K 1/10W 5% 0603	R314-315	VISHAY	CRCW060310K0JNEA
99	1	10M 1/10W 5% 0603	R15	VISHAY	CRCW060310M0FNEA
100	1	100K 1/10W 5% 0603	R317	VISHAY	CRCW0603100KJNEA
101	5	330 1/10W 5% 0603	R111-113,R115,R123	VISHAY	CRCW0603330RJNEA
102	1	1M 1/10W 5% 0603	R33	VISHAY	CRCW06031M00FNEA
103	7	0 1/10W 5% 0603	R102,R109,R133,R168, R308-309,R334	PHYCOMP	232270296001L
104	10	49.9 1/16W 1% 0603	R60-63,R78-80,R83-85	VISHAY	CRCW060349R9FNEA
105	2	10 1/10W 5% 0603	R127-128	VISHAY	CRCW060310R0JNEA

ADSP-BF527 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
106	8	100PF 50V 5% 0603	C260-267	PANASONIC	ECJ-1VC1H101J
107	1	12.4K 1/10W 1% 0603	R67	DIGI-KEY	311-12.4KHRTR-ND
108	2	75.0 1/10W 1% 0603	R81-82	DALE	CRCW060375R0FKEA
109	2	100 1/16W 5% 0402	R44-45	DIGI-KEY	311-100JRTR-ND
110	1	390PF 25V 5% 0603	C270	AVX	06033A391FAT2A
111	2	24.9K 1/10W 1% 0603	R98,R150	DIGI-KEY	311-24.9KHTR-ND
112	5	10UF 10V 10% 0805	C89,C94,C128,C170, C279	PANASONIC	ECJ-2FB1A106K
113	1	105.0K 1/16W 1% 0603	R137	PANASONIC	ERJ-3EKF1053V
114	4	0.05 1/2W 1% 1206	R134,R141-143	SEI	CSF 1/2 0.05 1%R
115	2	10UF 16V 10% 1210	C147,C184	AVX	1210YD106KAT2A
116	2	GREEN LED001	LED4,LED7	PANASONIC	LN1361CTR
117	2	RED LED001	LED5,LED8	PANASONIC	LN1261CTR
118	2	1000PF 50V 5% 1206	C179-180	AVX	12065A102JAT2A
119	1	255.0K 1/10W 1% 0603	R152	VISHAY	CRCW06032553FK
120	2	80.6K 1/10W 1% 0603	R99,R151	DIGI-KEY	311-80.6KHRCT-ND
121	4	5A MBR540T3G SMC	D5,D10-12	ON SEMI	MBRS540T3G

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
122	3	15KV PGB1010603 0603	D2-4	LIT- TLEFUSE	PGB1010603MR
123	1	VARISTOR V5.5MLA 30A 0603	R37	LIT- TLEFUSE	V5.5MLA0603
124	1	THERM 0.5A 0.4 1206	R36	LIT- TLEFUSE	1206L050-C
125	1	20MA MA3X717E DIO005	D1	PANASONIC	MA3X717E
126	2	2.5UH 30% IND013	L2,L4	COILCRAFT	MSS1038-252NLB
127	2	330.0 1/16W 1% 0402	R68,R77	DIGI-KEY	541-330LCT-ND
128	5	47.0K 1/16W 1% 0402	R38-39,R50-52	ROHM	MCR01MZPF4702
129	3	1.0K 1/16W 1% 0402	R197,R199-200	PANASONIC	ERJ-2RK1001X
130	2	1000PF 2000V 10% 1206	C133-134	AVX	1206GC102KAT1A
131	1	1UF 50V 10% 0603	C304	DIGI-KEY	587-1257-2-ND
132	1	10.0K 1/16W 1% 0402	R312	DIGI-KEY	541-10.0KLCT-ND
133	2	0.027 1/2W 1% 1206	R101,R103	SUSUMU	RL1632T-R027-F-N
134	4	5.6K 1/16W 0.5% 0402	R40-43	SUSUMU	RR0510P-562-D
135	1	680 1/16W 1% 0402	R47	BC COMPO- NENTS	2312 275 16801
136	1	90.9K 1/16W 5% 0402	R90	DIGI-KEY	541-90.9KLCT-ND

ADSP-BF527 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
137	1	40.2K 1/16W 5% 0402	R57	DIGI-KEY	541-40.2KLCT-ND
138	4	3.3UF 16V 10% 0805	C113,C118,C120,C129	DIGI-KEY	490-3337-2-ND
139	3	22UF 10V 10% 1210	C139,C142,C145	DIGI-KEY	490-1876-2-ND
140	1	95K 1/10W 1% 0603	R136	DIGI-KEY	311-95.3KHRTR-ND
141	5	15PF 50V 5% 0402	C119,C130,C197-199	DIGI-KEY	399-1014-2-ND
142	1	422K 1/10W 1% 0603	R100	PANASONIC	ERJ-3EKF4223V
143	1	15uH 20% IND015	L5	COILCRAFT	MSS4020-153ML
144	3	.5A B0540W SOD-123	D17-19	DIODES INC	B0540W-7-F
145	1	.5A BZT52C33S SOD-323	D20	DIODES INC	BZT52C33S-7-F
146	5	2.2UF 25V 10% 0805	C275-276,C278,C291- 292	DIGI-KEY	490-3331-1-ND
147	11	33 1/16W 5% RNS003	RN2-12	PANASONIC	EXB-2HV330JV
148	2	33 1/32W 5% RNS005	RN13-14	PANASONIC	EXB-28V330JX
149	2	51.1 1/16W 1% 0402	R316,R348	DIGI-KEY	541-51.1LCT-ND
150	1	30A GSOT05 SOT23-3	D15	VISHAY	GSOT05-GS08
151	1	30A GSOT03 SOT23-3	D14	VISHAY	GSOT03-GS08

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
152	1	40A ESD5Z2.5T1 SOD-523	D13	ON SEMI	ESD5Z2.5T1G
153	1	30A GSOT08 SOT23-3	D16	VISHAY	GSOT08-GS08

A

B

C

D

1

1

2

2


3

3

4

4

ADSP-BF527 EZ-KIT LITE SCHEMATIC



**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title	ADSP-BF527 EZ-KIT Lite TITLE
-------	---------------------------------

Size C	Board No. A0208-2006	Rev 2.2
-----------	-------------------------	------------

Date	1-13-2010_14:04	Sheet	1	of	15
------	-----------------	-------	---	----	----

A

B

C

D

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2

3

4

1

2













3

4

1

2

3

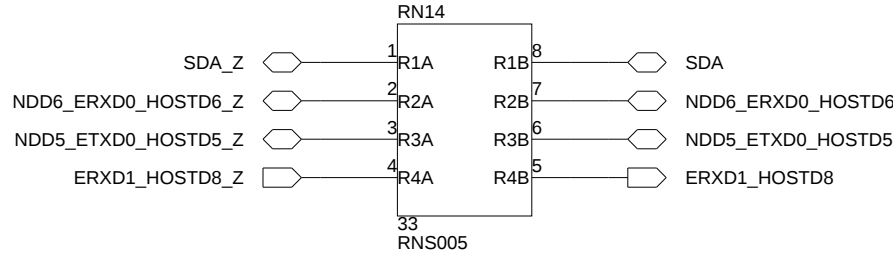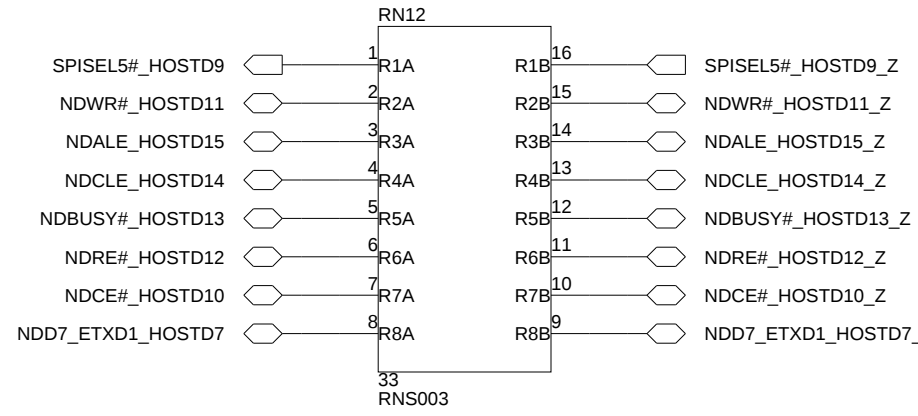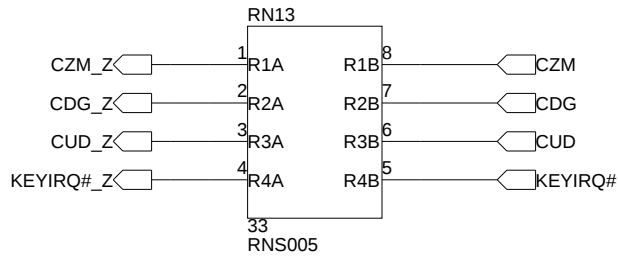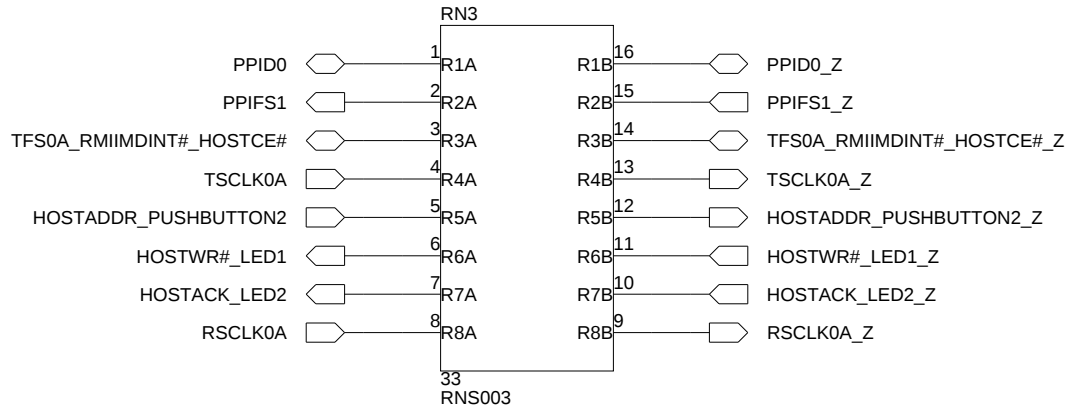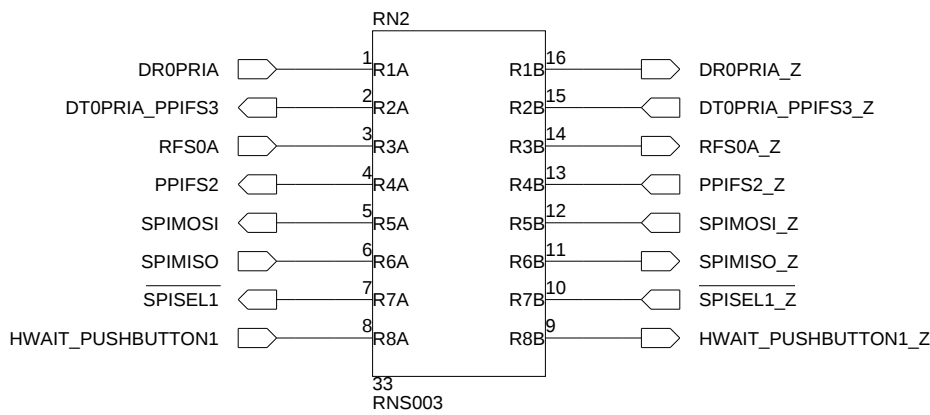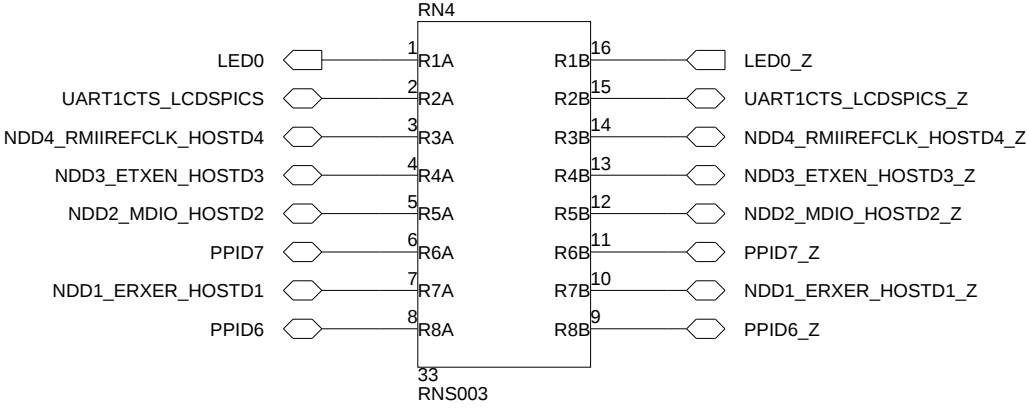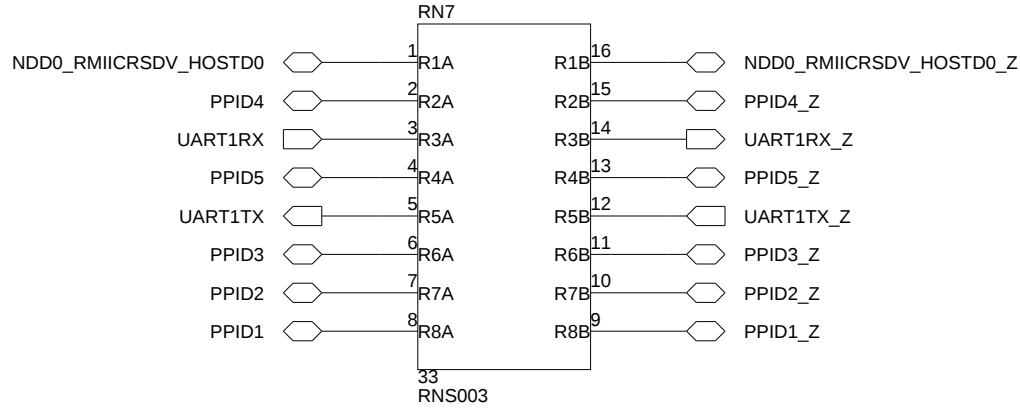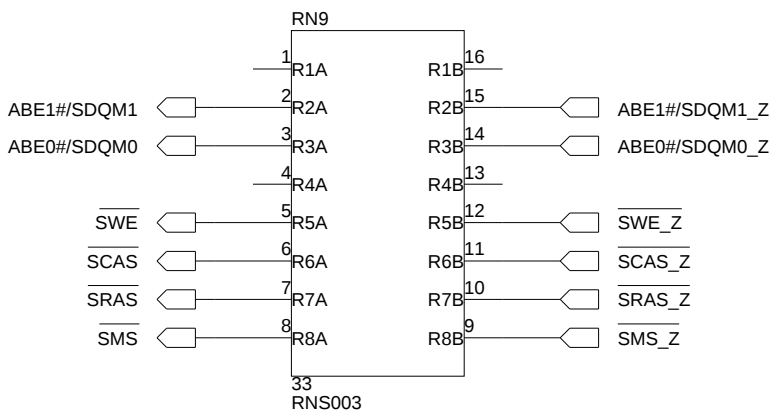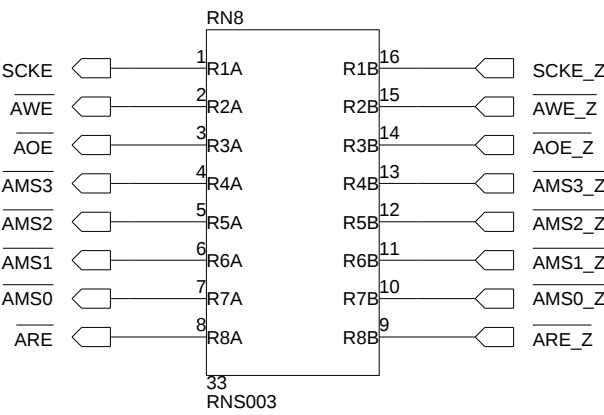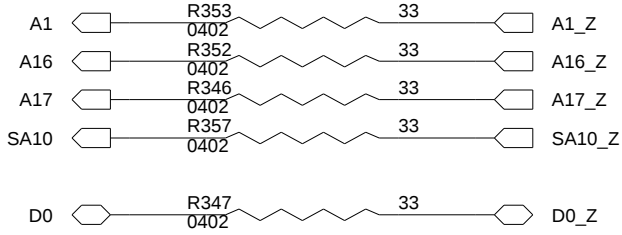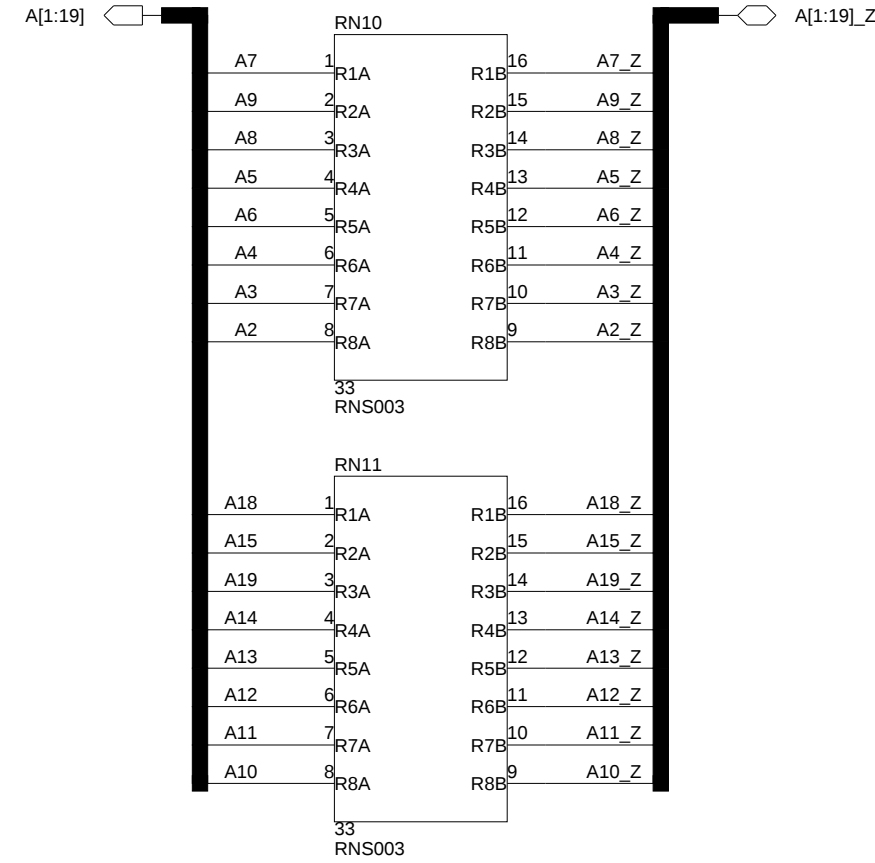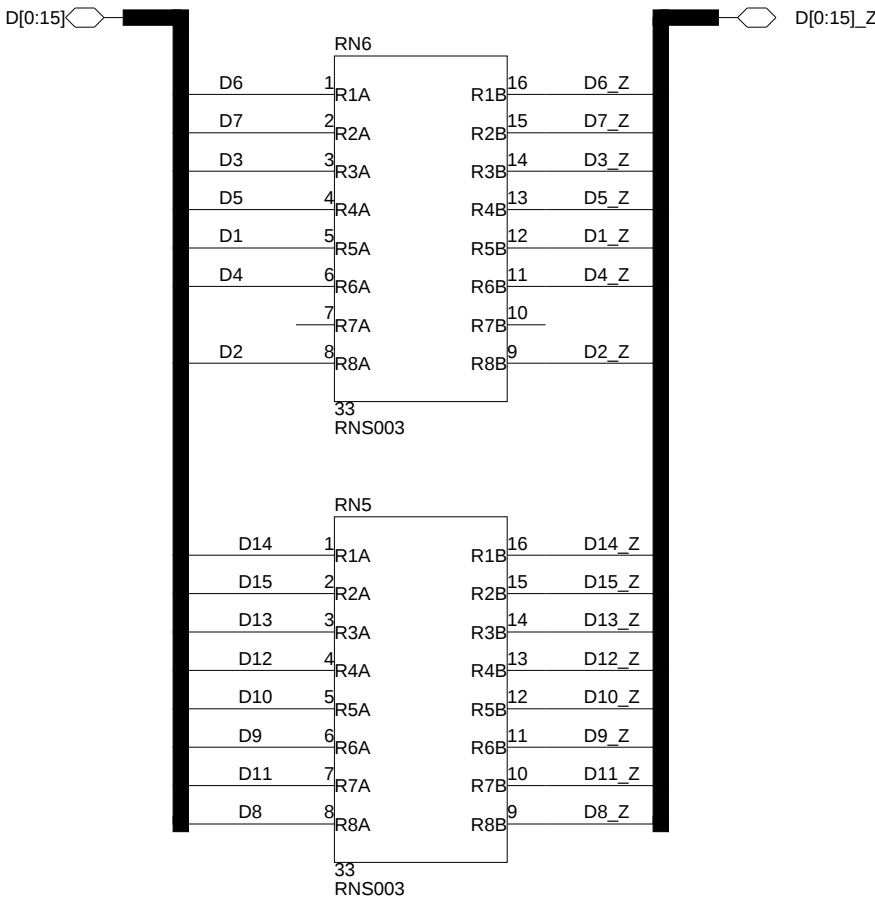

**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD


Title **ADSP-BF527 EZ-KIT Lite
SERIES TERMINATION**

Size C	Board No. A0208-2006	Rev 2.2
Date 1-13-2010_14:04	Sheet 3 of	15


SW7: FLASH Enable

POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION / OFF MODE
SW7.1	DSP (U2)	FLASH (U5)	ON	J2.65 (Expansion Interface)
SW7.2	DSP (U2)	FLASH (U5)	ON	J2.63 (Expansion Interface)
SW7.3	DSP (U2)	FLASH (U5)	ON	J2.61 (Expansion Interface)
SW7.4	DSP (U2)	FLASH (U5)	ON	J2.59 (Expansion Interface)

4 MB FLASH
(2M x 16)

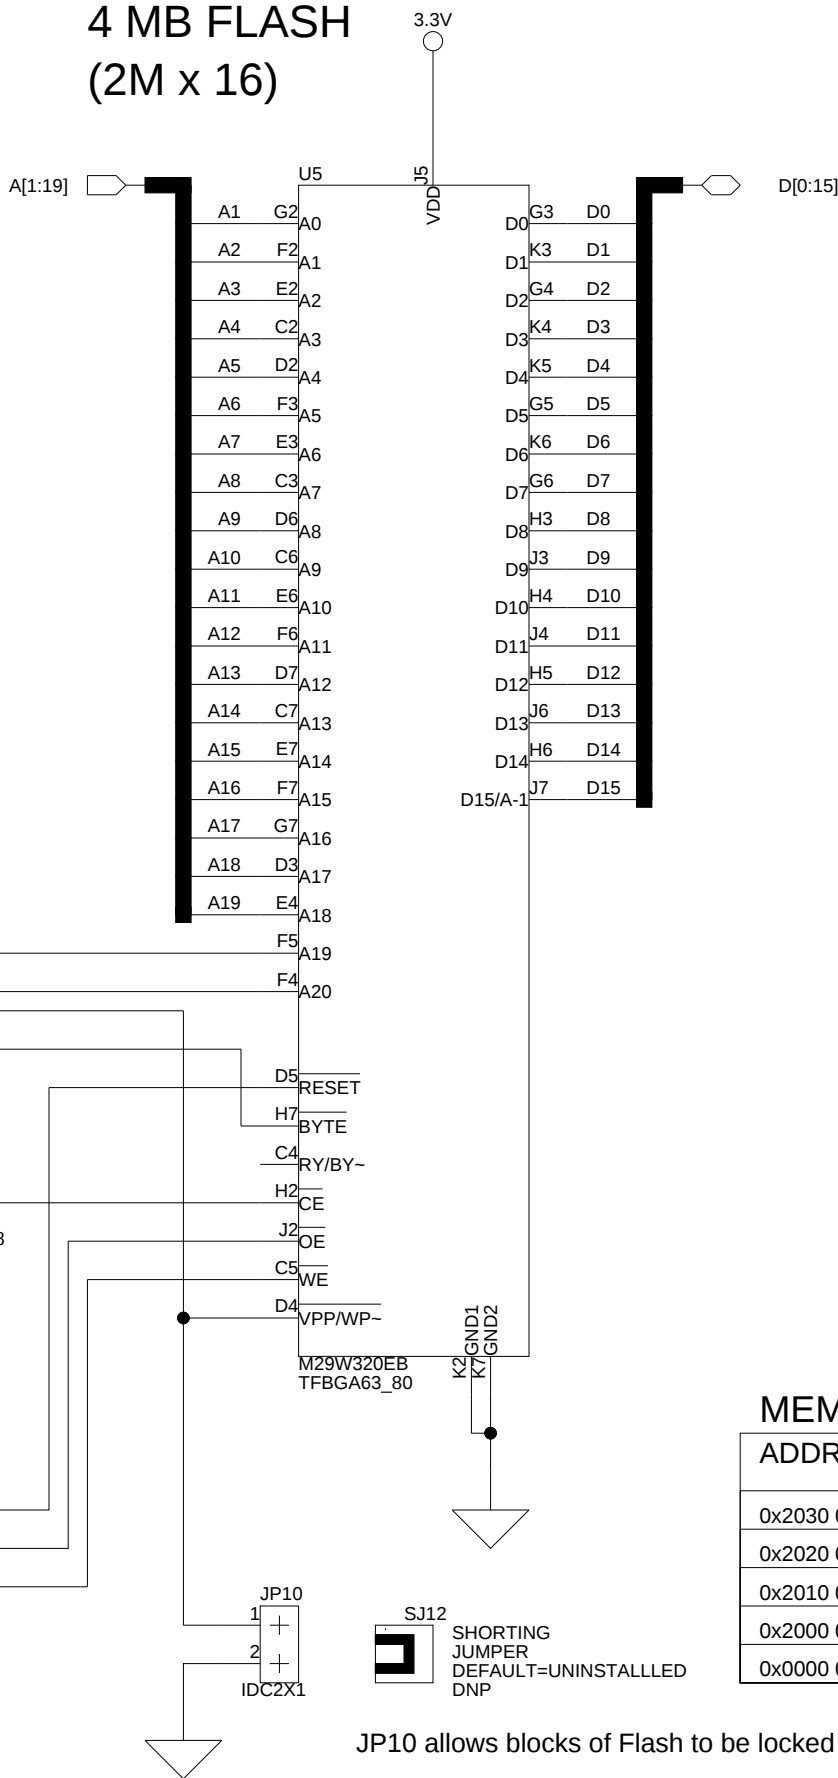


64MB SDRAM (32M x 16)

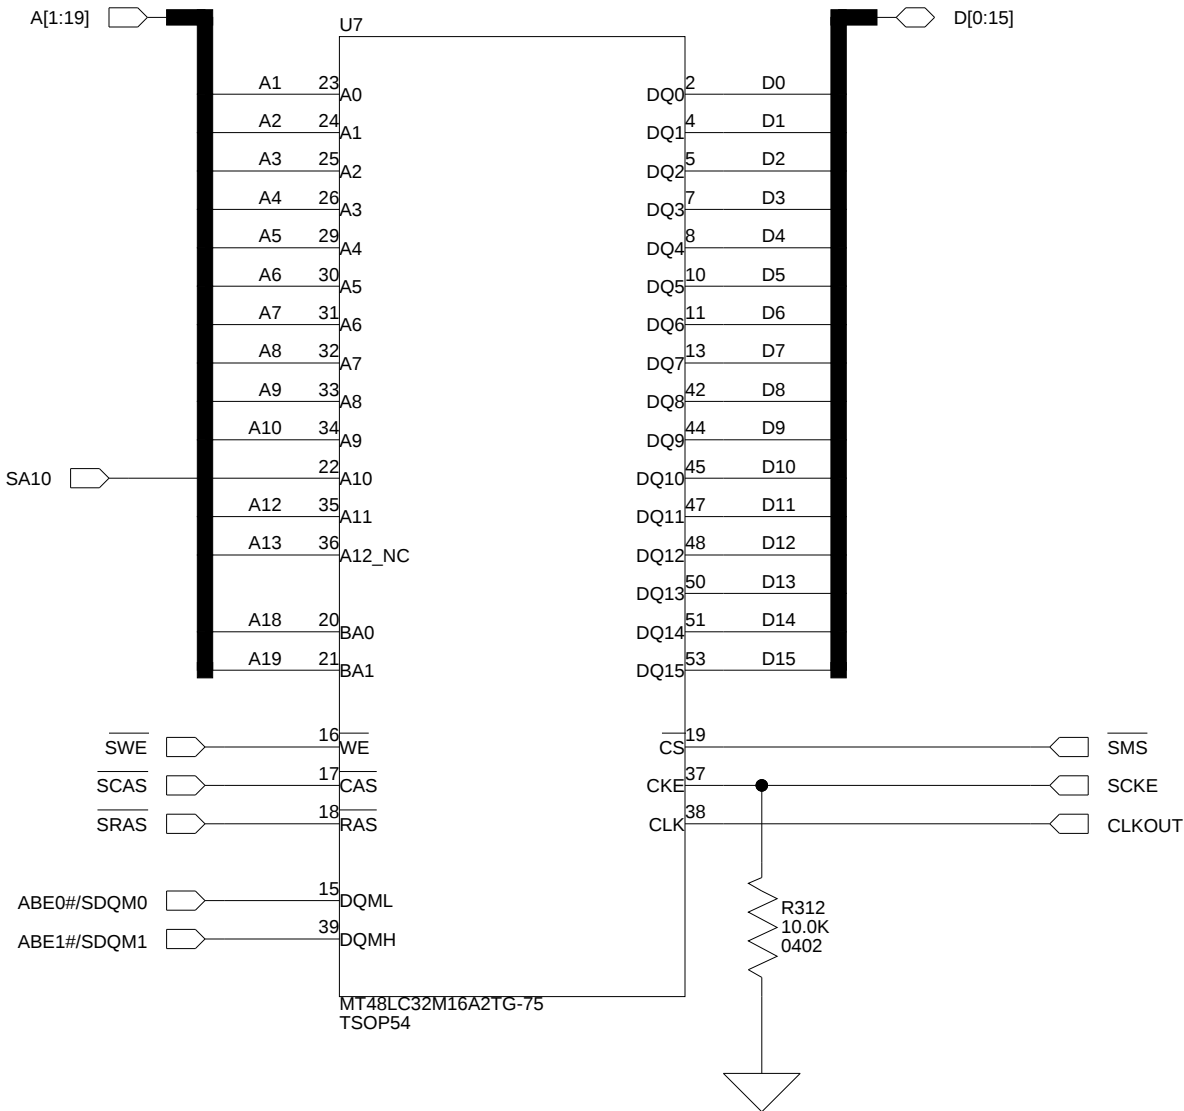


MEMORY MAP

ADDRESS RANGE	SELECT LINE	TYPE
0x2030 0000 - 0x203F FFFF	ASYNC BANK 3	FLASH
0x2020 0000 - 0x202F FFFF	ASYNC BANK 2	FLASH
0x2010 0000 - 0x201F FFFF	ASYNC BANK 1	FLASH
0x2000 0000 - 0x200F FFFF	ASYNC BANK 0	FLASH
0x0000 0000 - 0x03FF FFFF	NONE	SDRAM

4Gb NAND FLASH

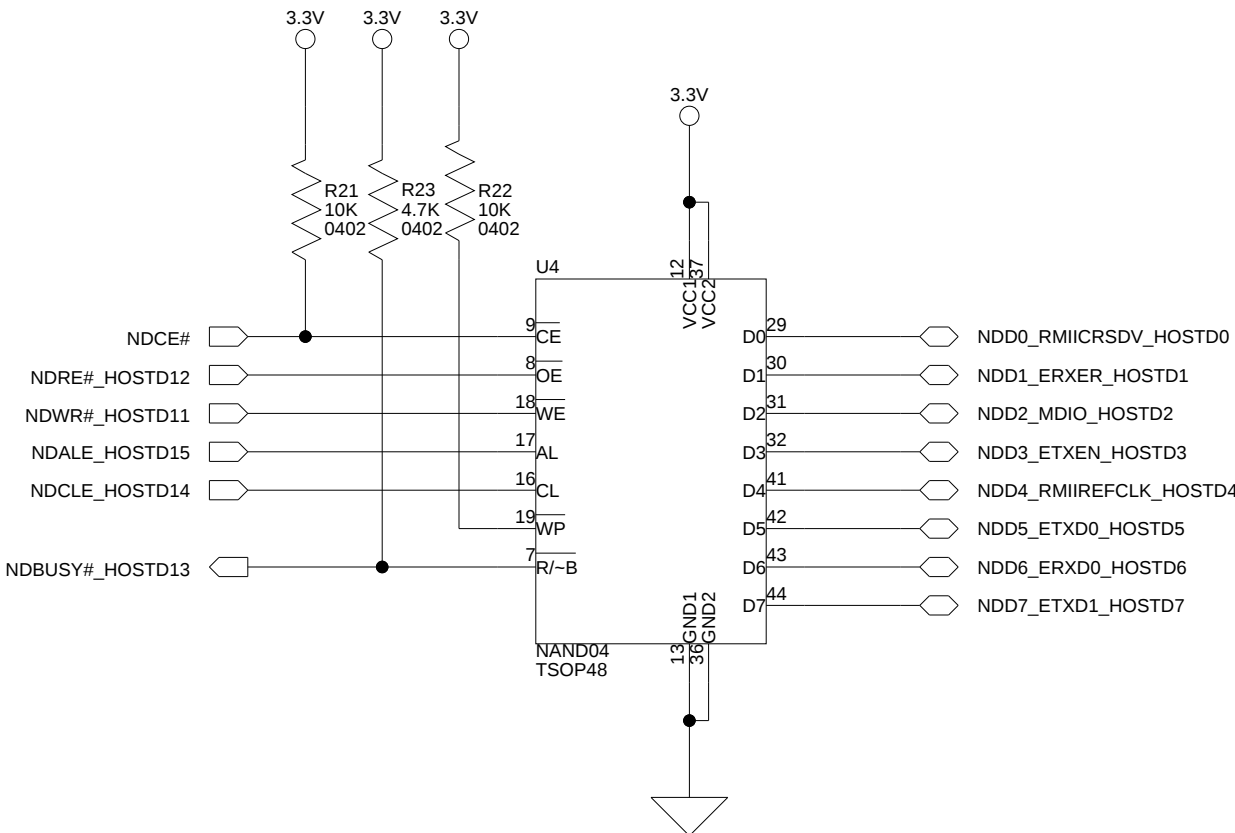

16 Mb SPI FLASH

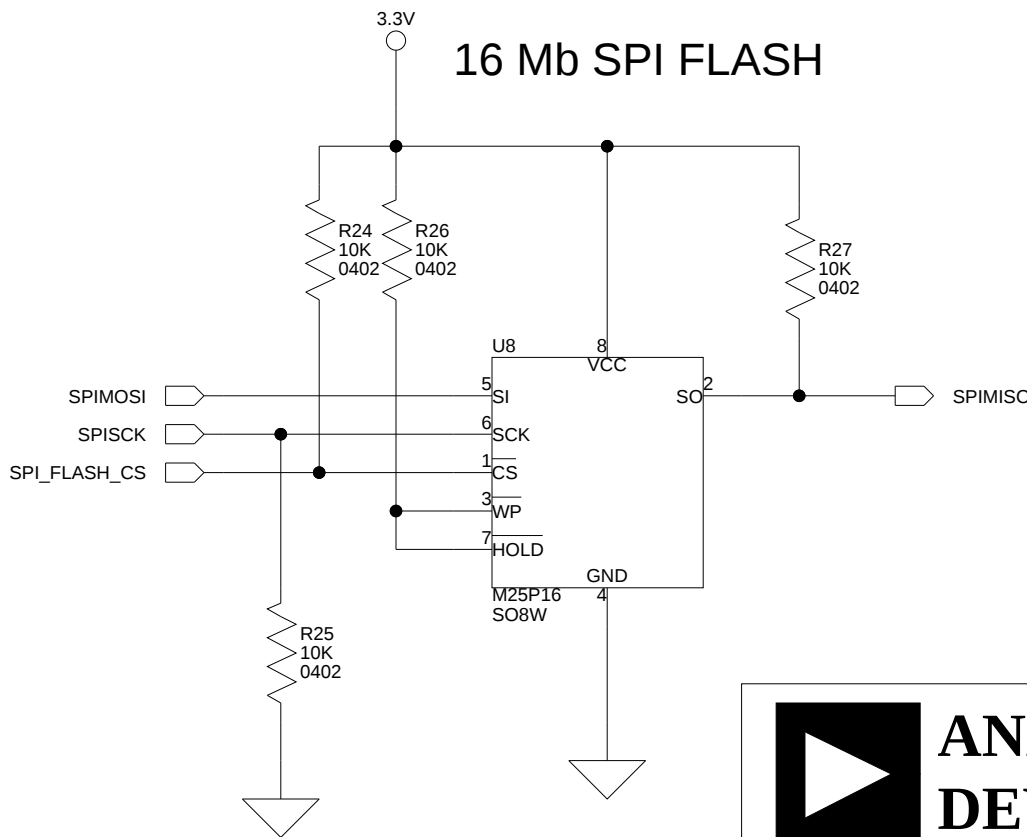

**ANALOG
DEVICES**


20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title **ADSP-BF527 EZ-KIT Lite
MEMORY**

Size C	Board No. A0208-2006	Rev 2.2
Date 1-22-2010_15:22	Sheet 5 of	15

"USB CLK"

"USB OTG"



ANALOG
DEVICES

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title

ADSP-BF527 EZ-KIT Lite
DSP USB OTG

Size
C

Board No.

A0208-2006


Rev
2.2


Date

1-22-2010_15:22

Sheet




6 of 15

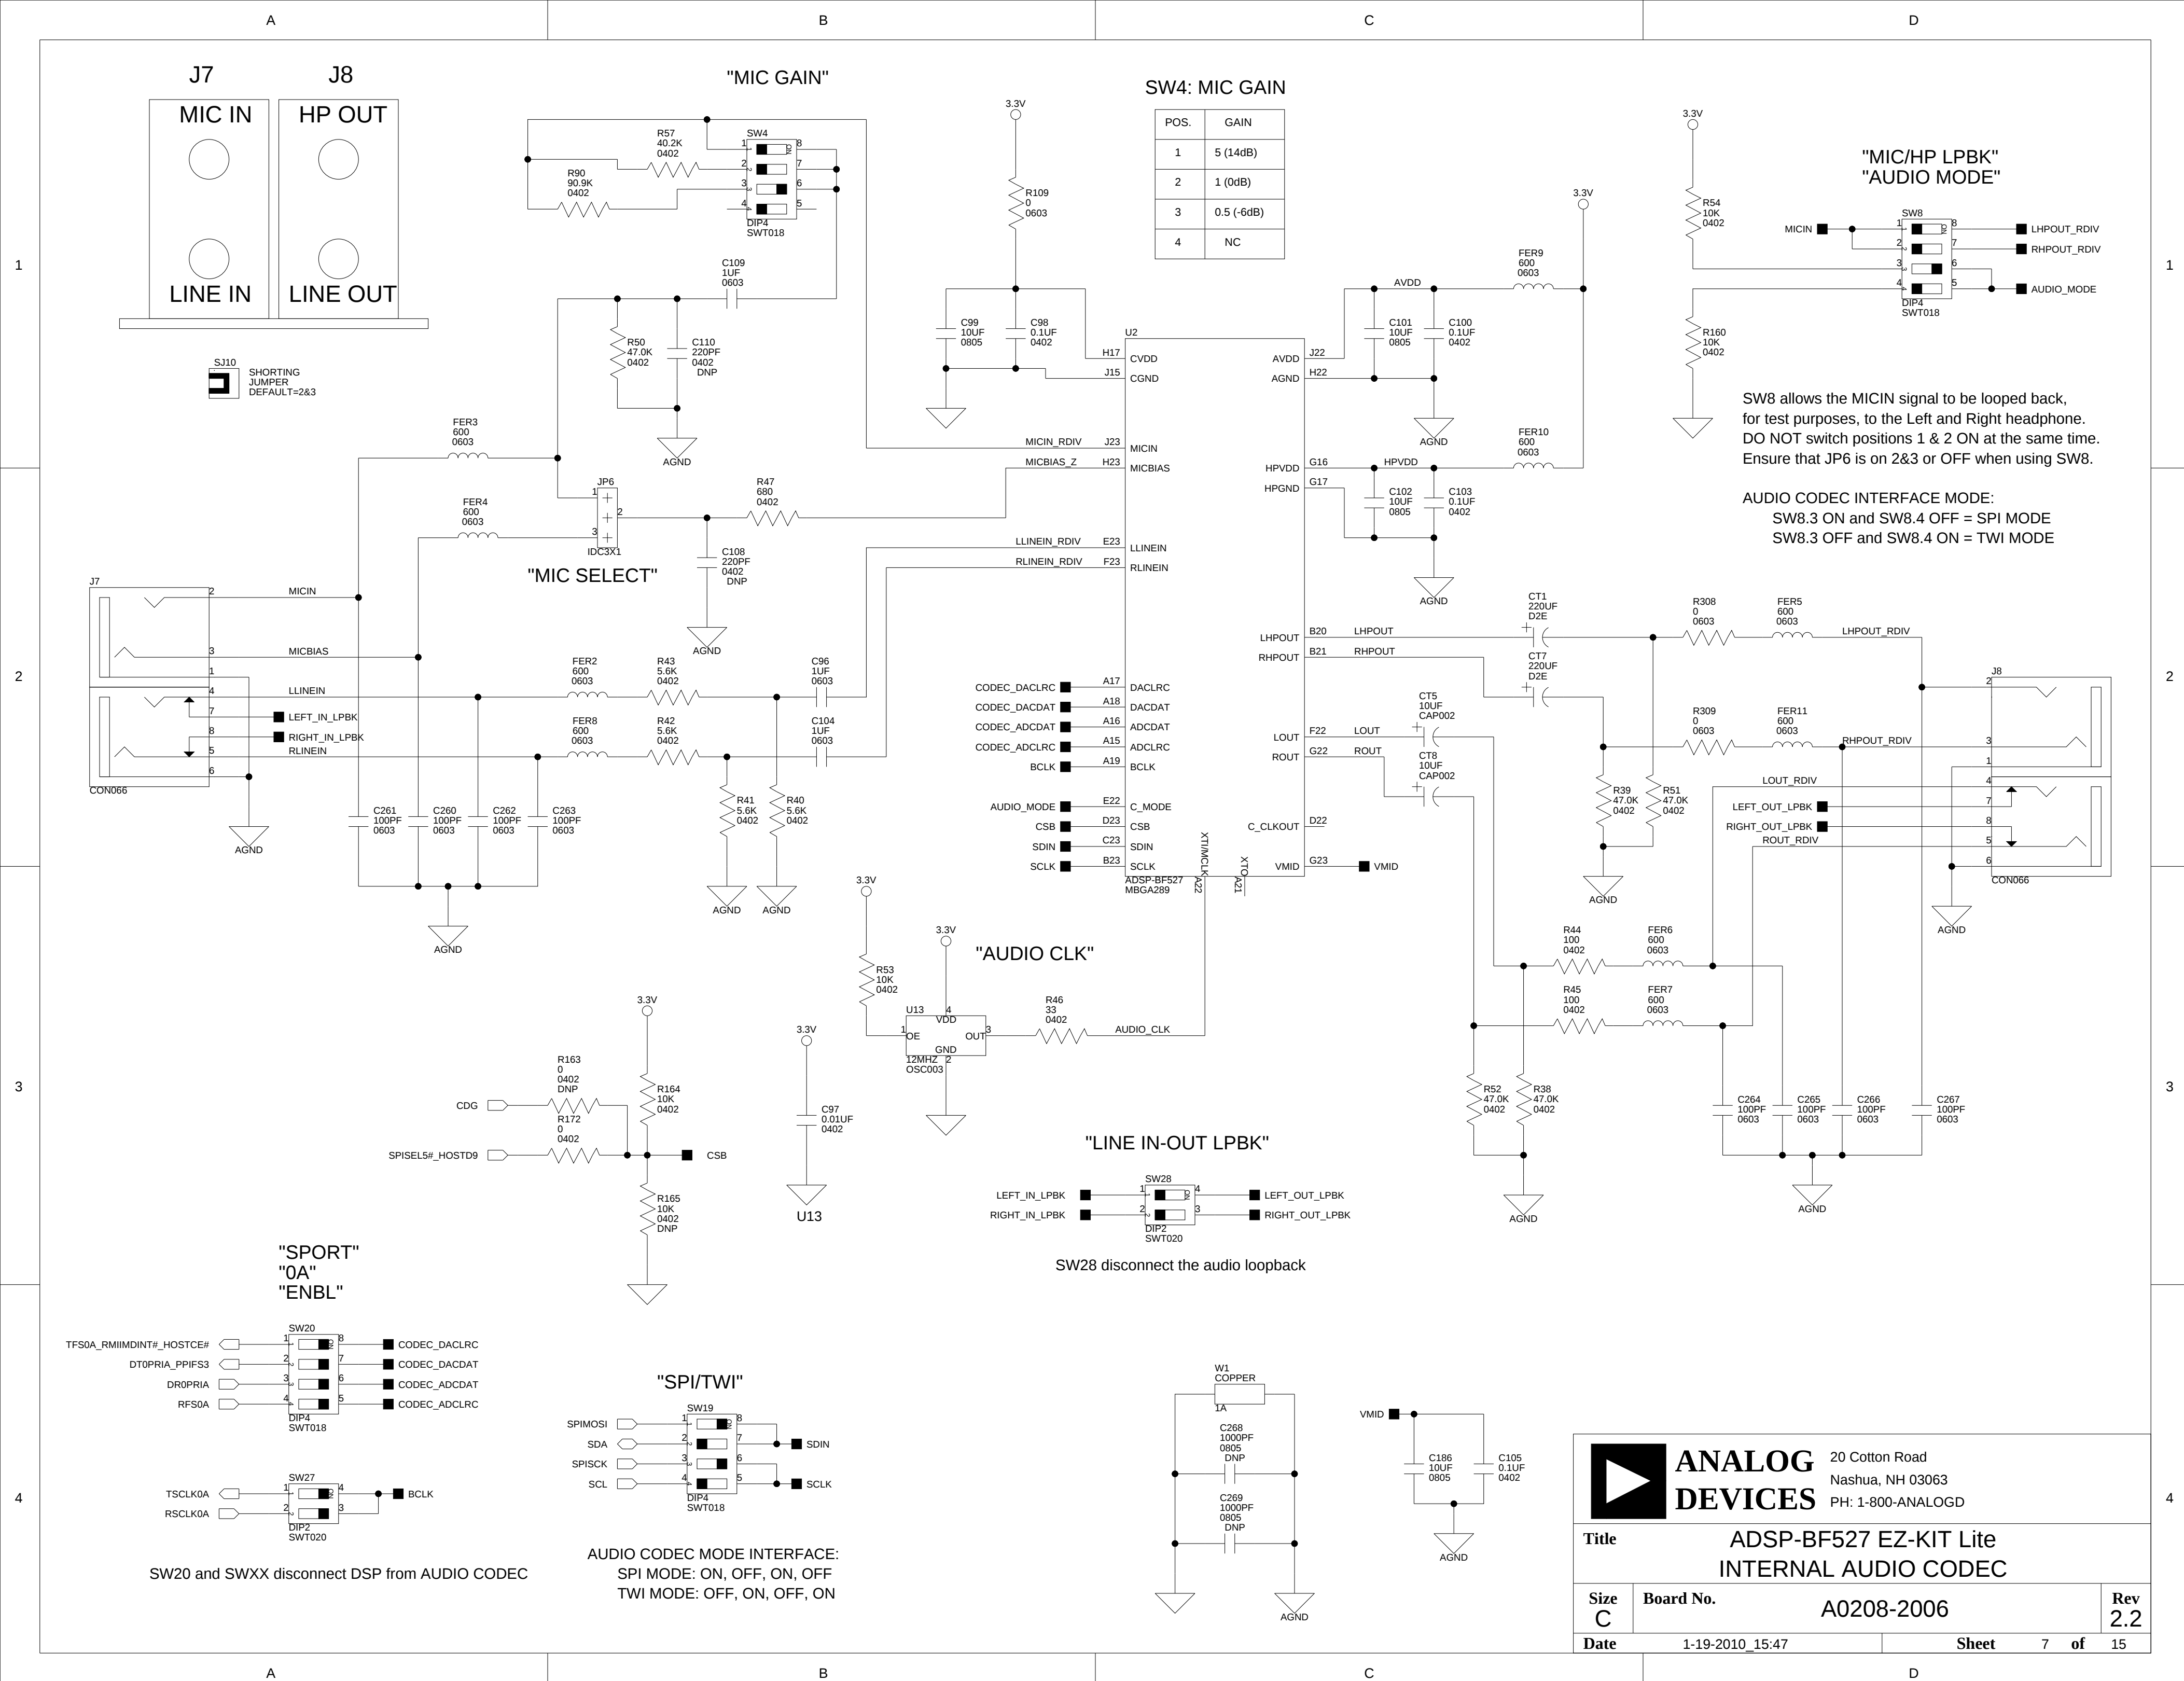


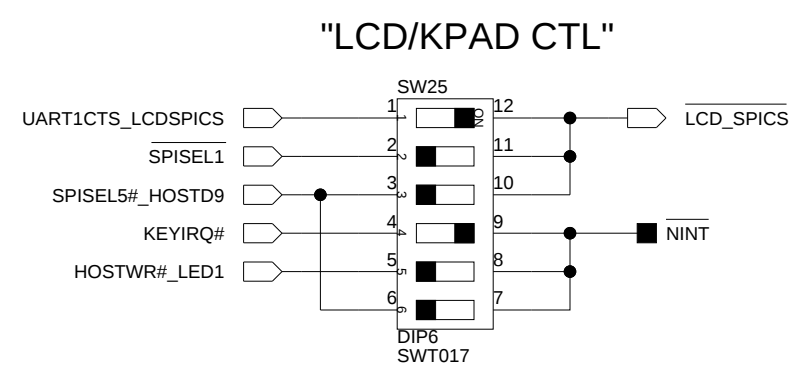


SW25 positions 1, 2 and 3 allows selection of DSP SPI CS for LCD_SPICS

SW25 positions 4, 5 and 6 allows selection of DSP GPIO for keypad interrupt

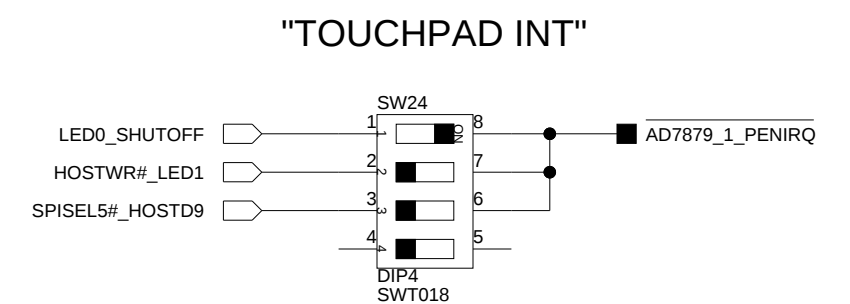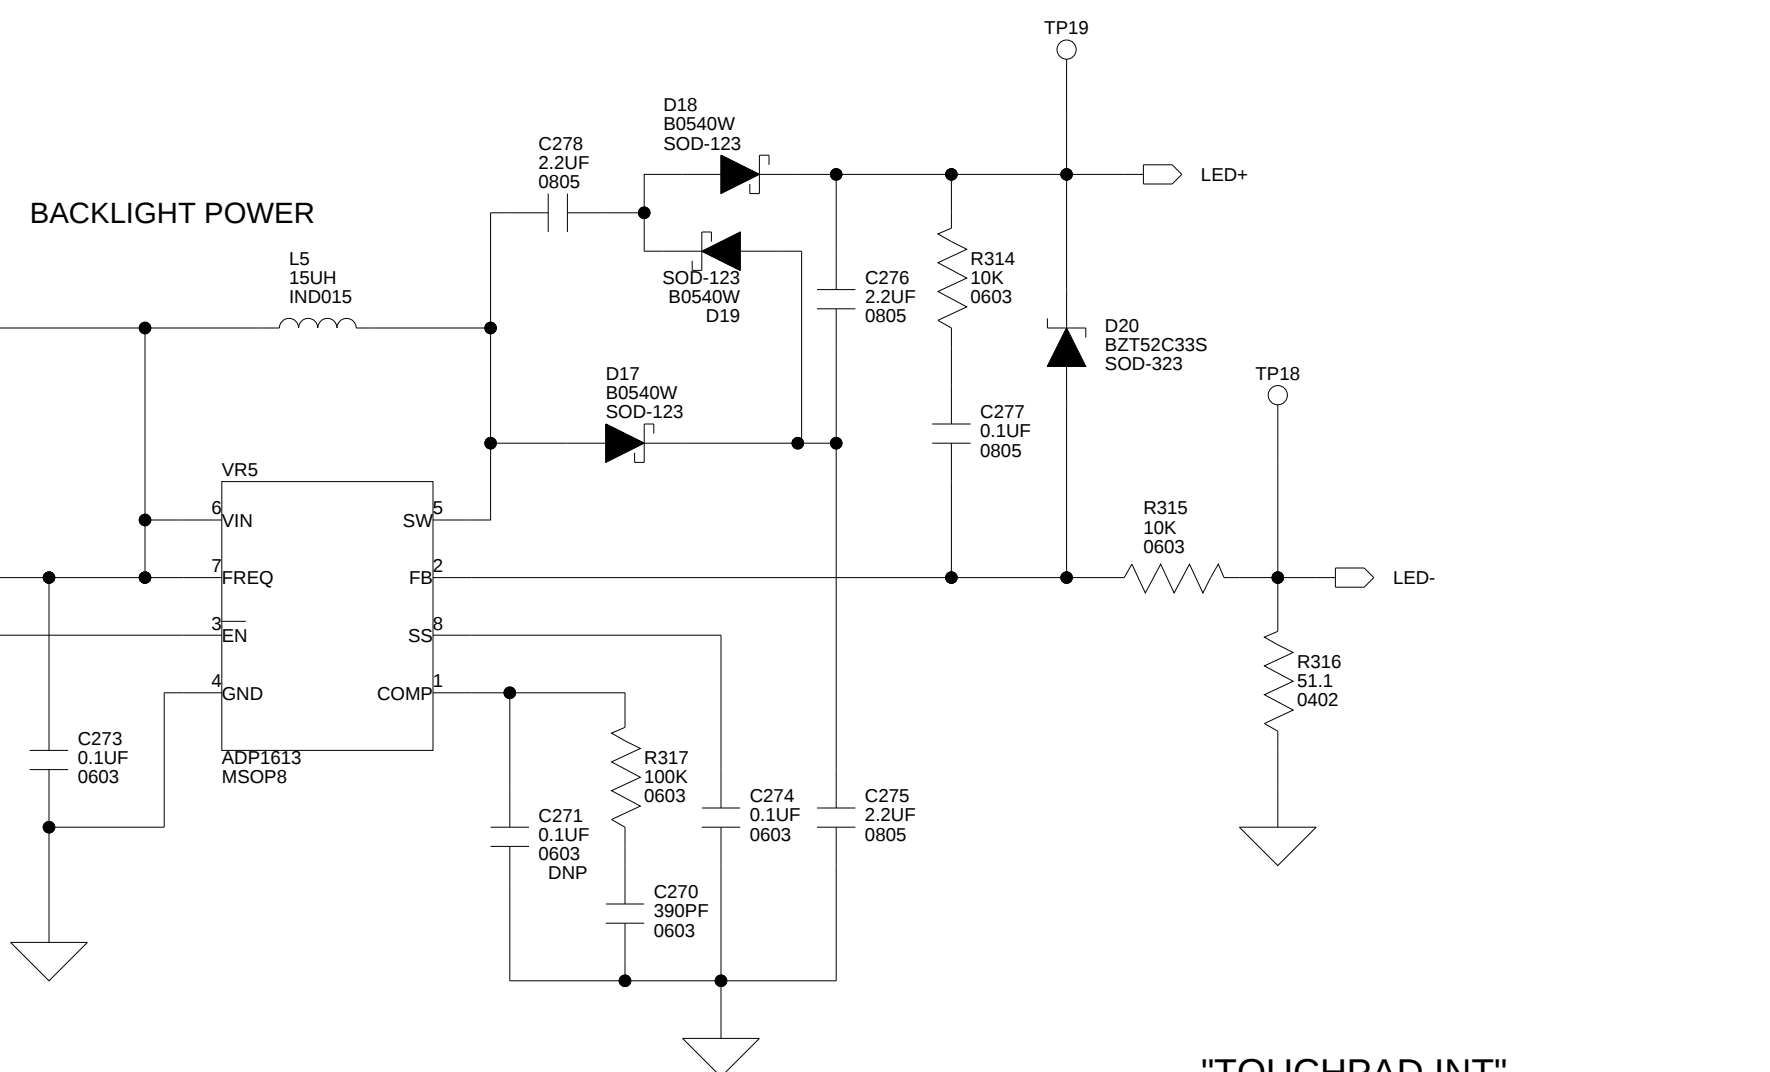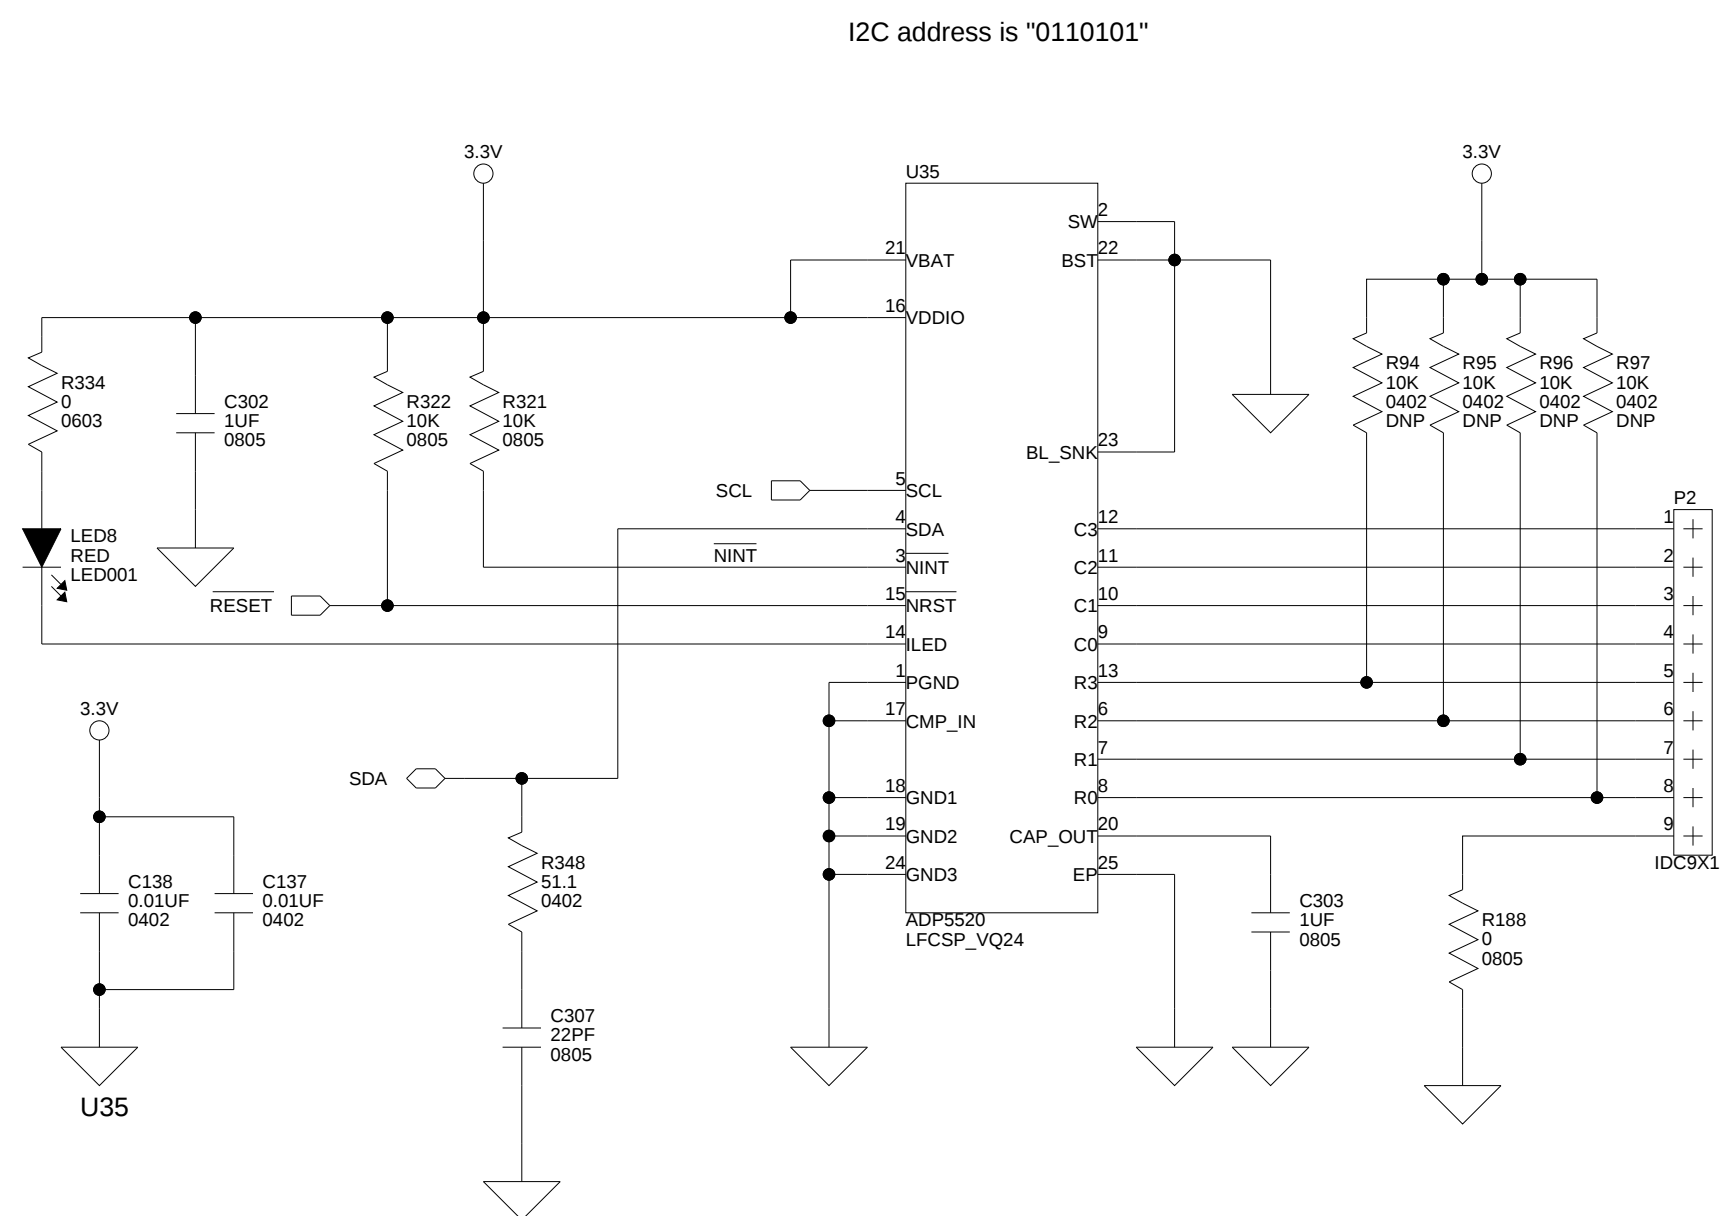

SW24 positions 1, 2 and 3 allows selection of DSP GPIO for touch screen interrupt

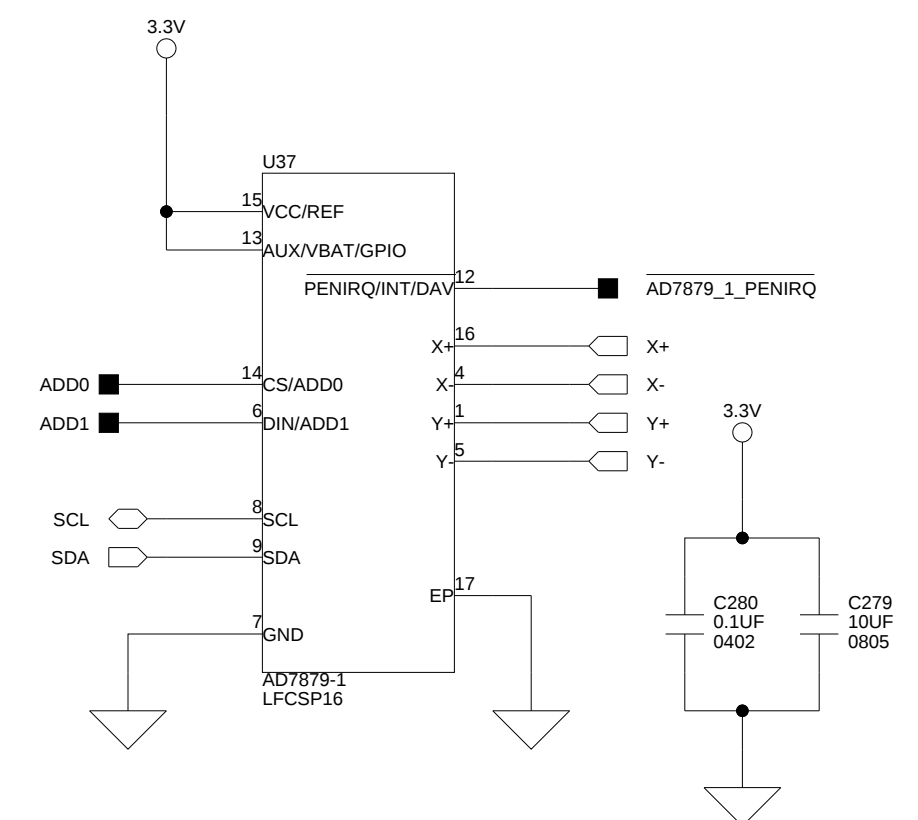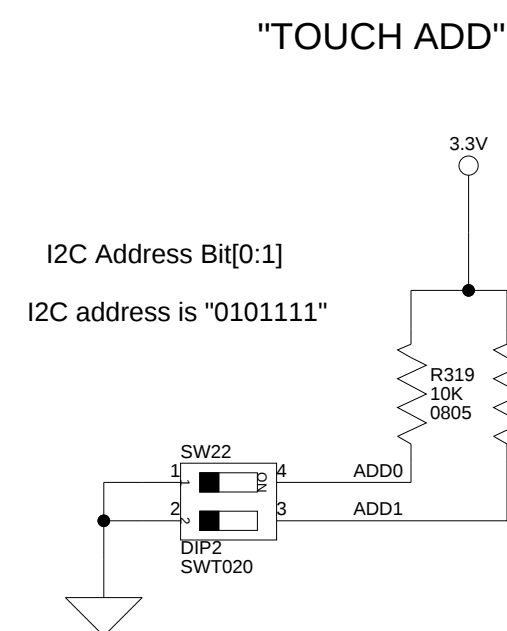


1

2

3

4

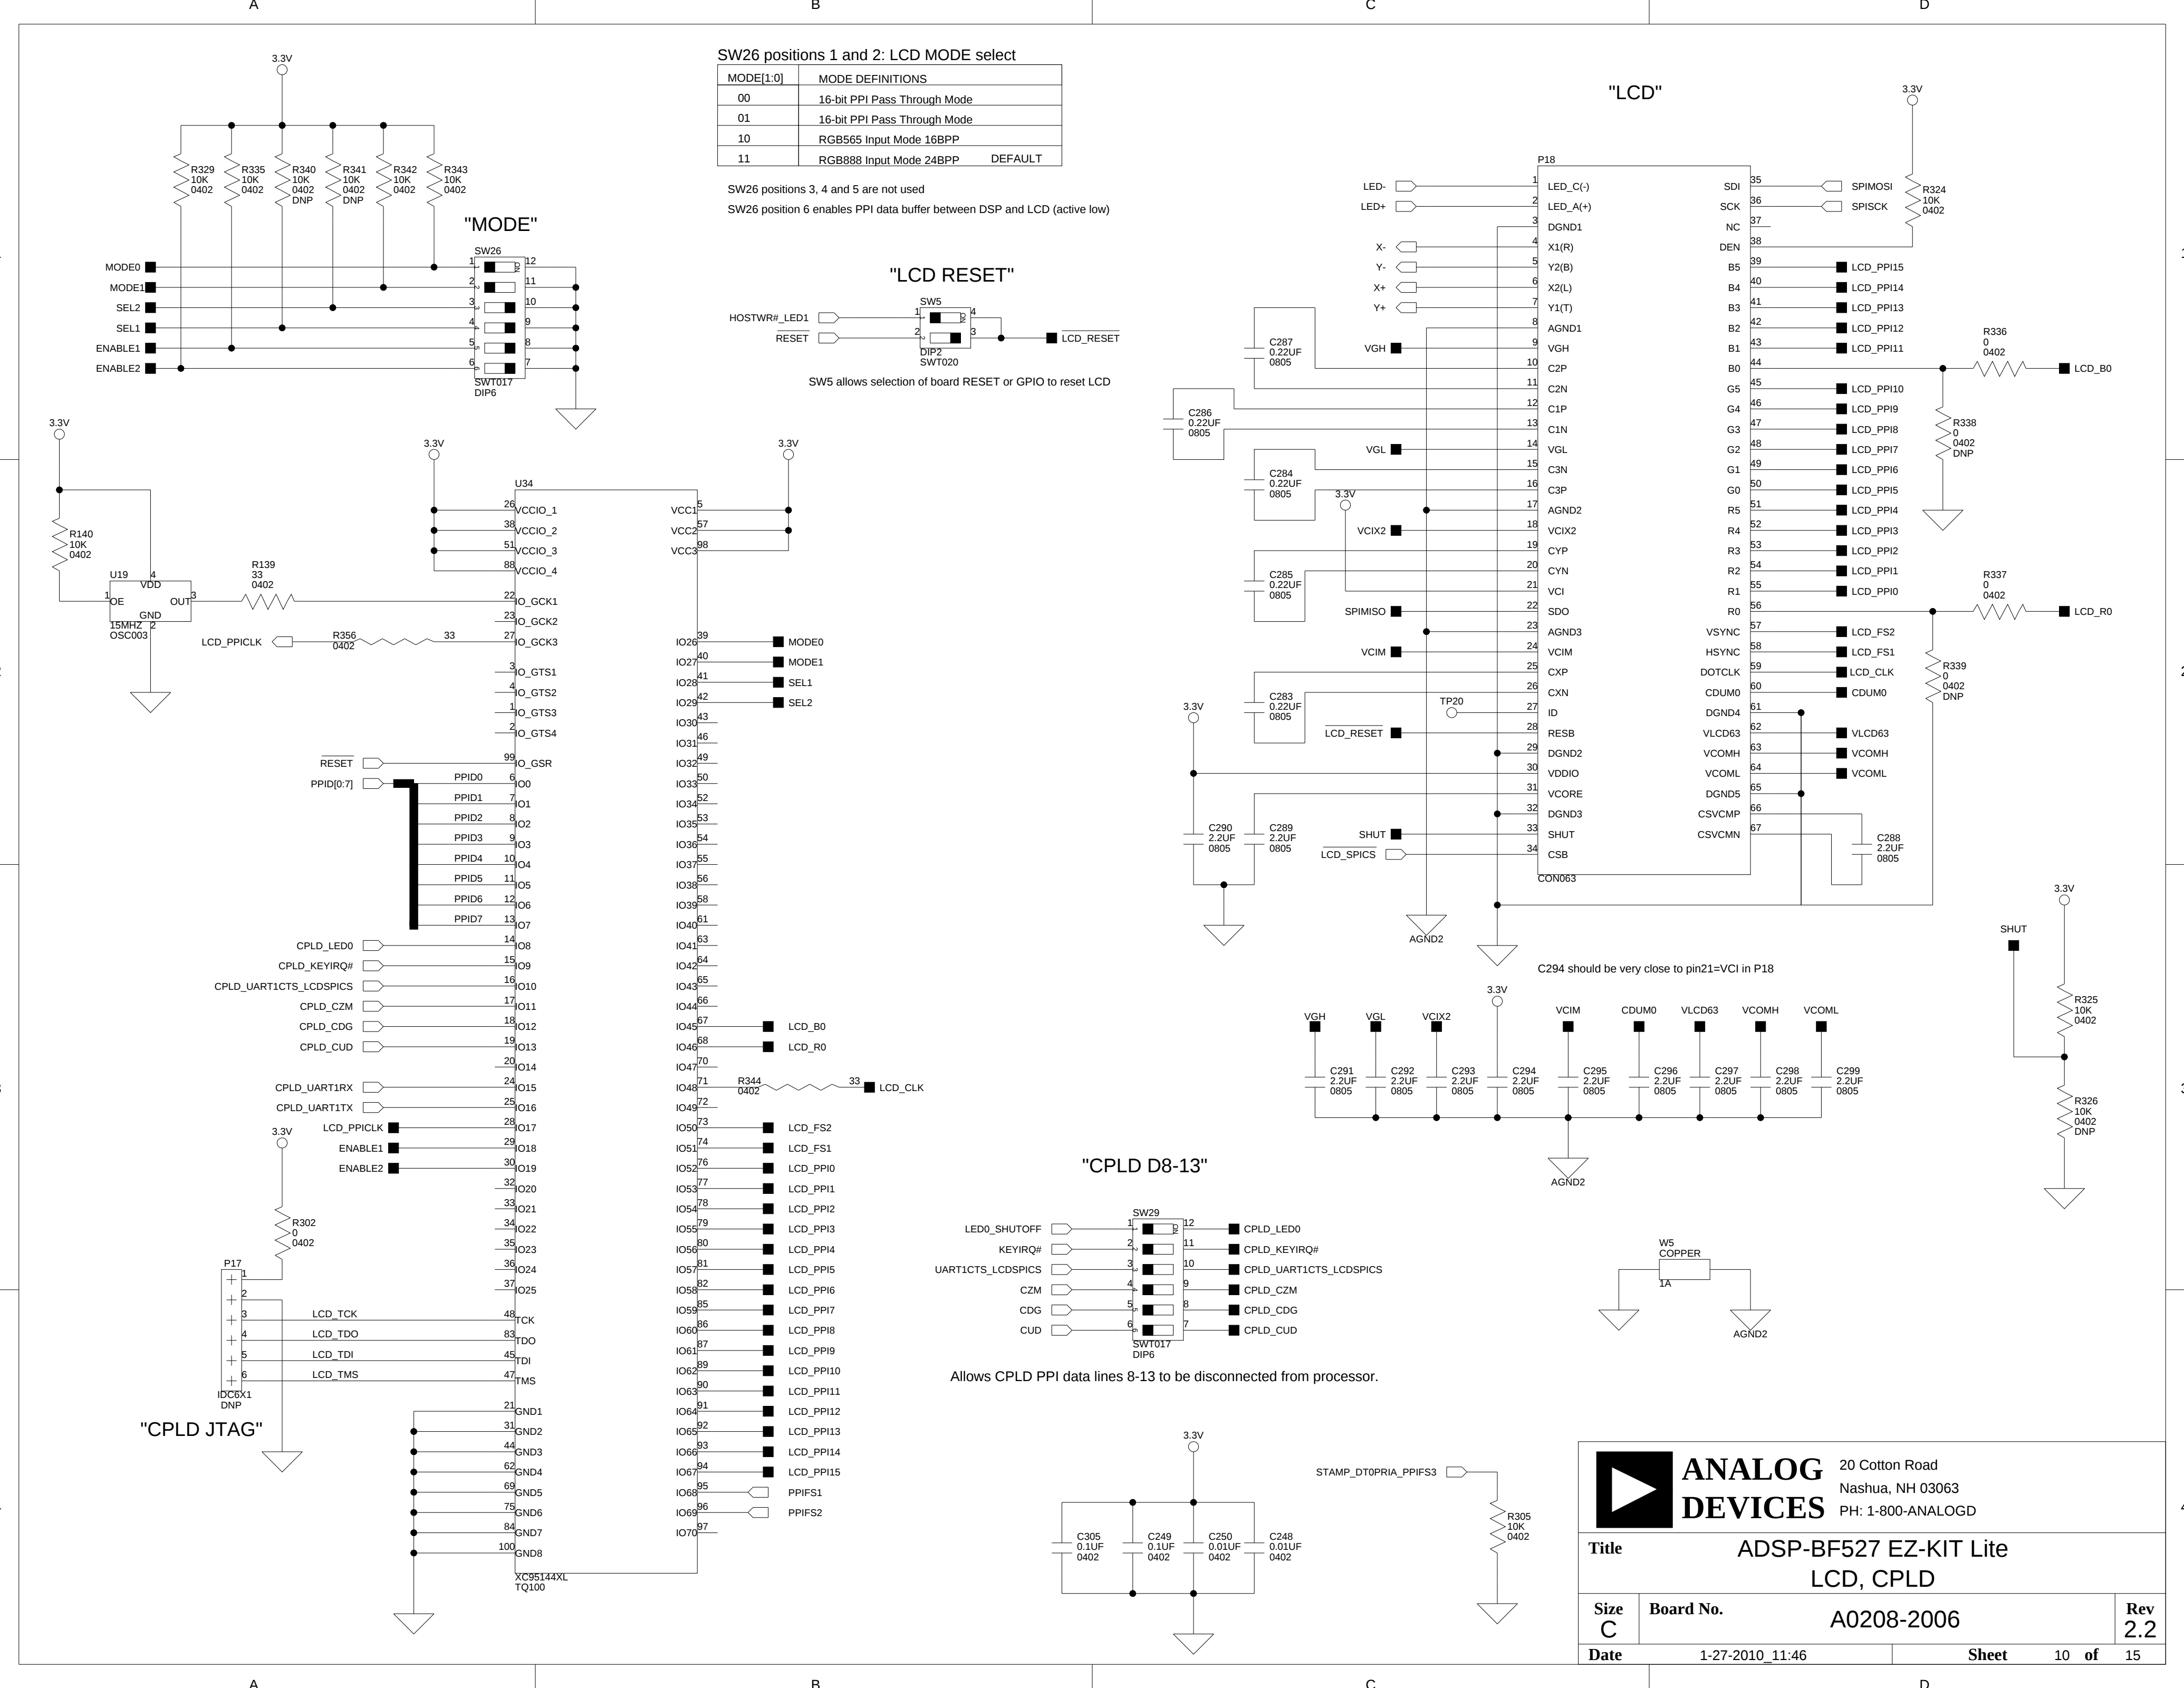


SW26 positions 1 and 2: LCD MODE select

MODE[1:0]	MODE DEFINITIONS
00	16-bit PPI Pass Through Mode
01	16-bit PPI Pass Through Mode
10	RGB565 Input Mode 16BPP
11	RGB888 Input Mode 24BPP DEFAULT


SW26 positions 3, 4 and 5 are not used
SW26 position 6 enables PPI data buffer between DSP and LCD (active low)

"LCD RESET"




SW5 allows selection of board RESET or GPIO to reset LCD

"LCD"

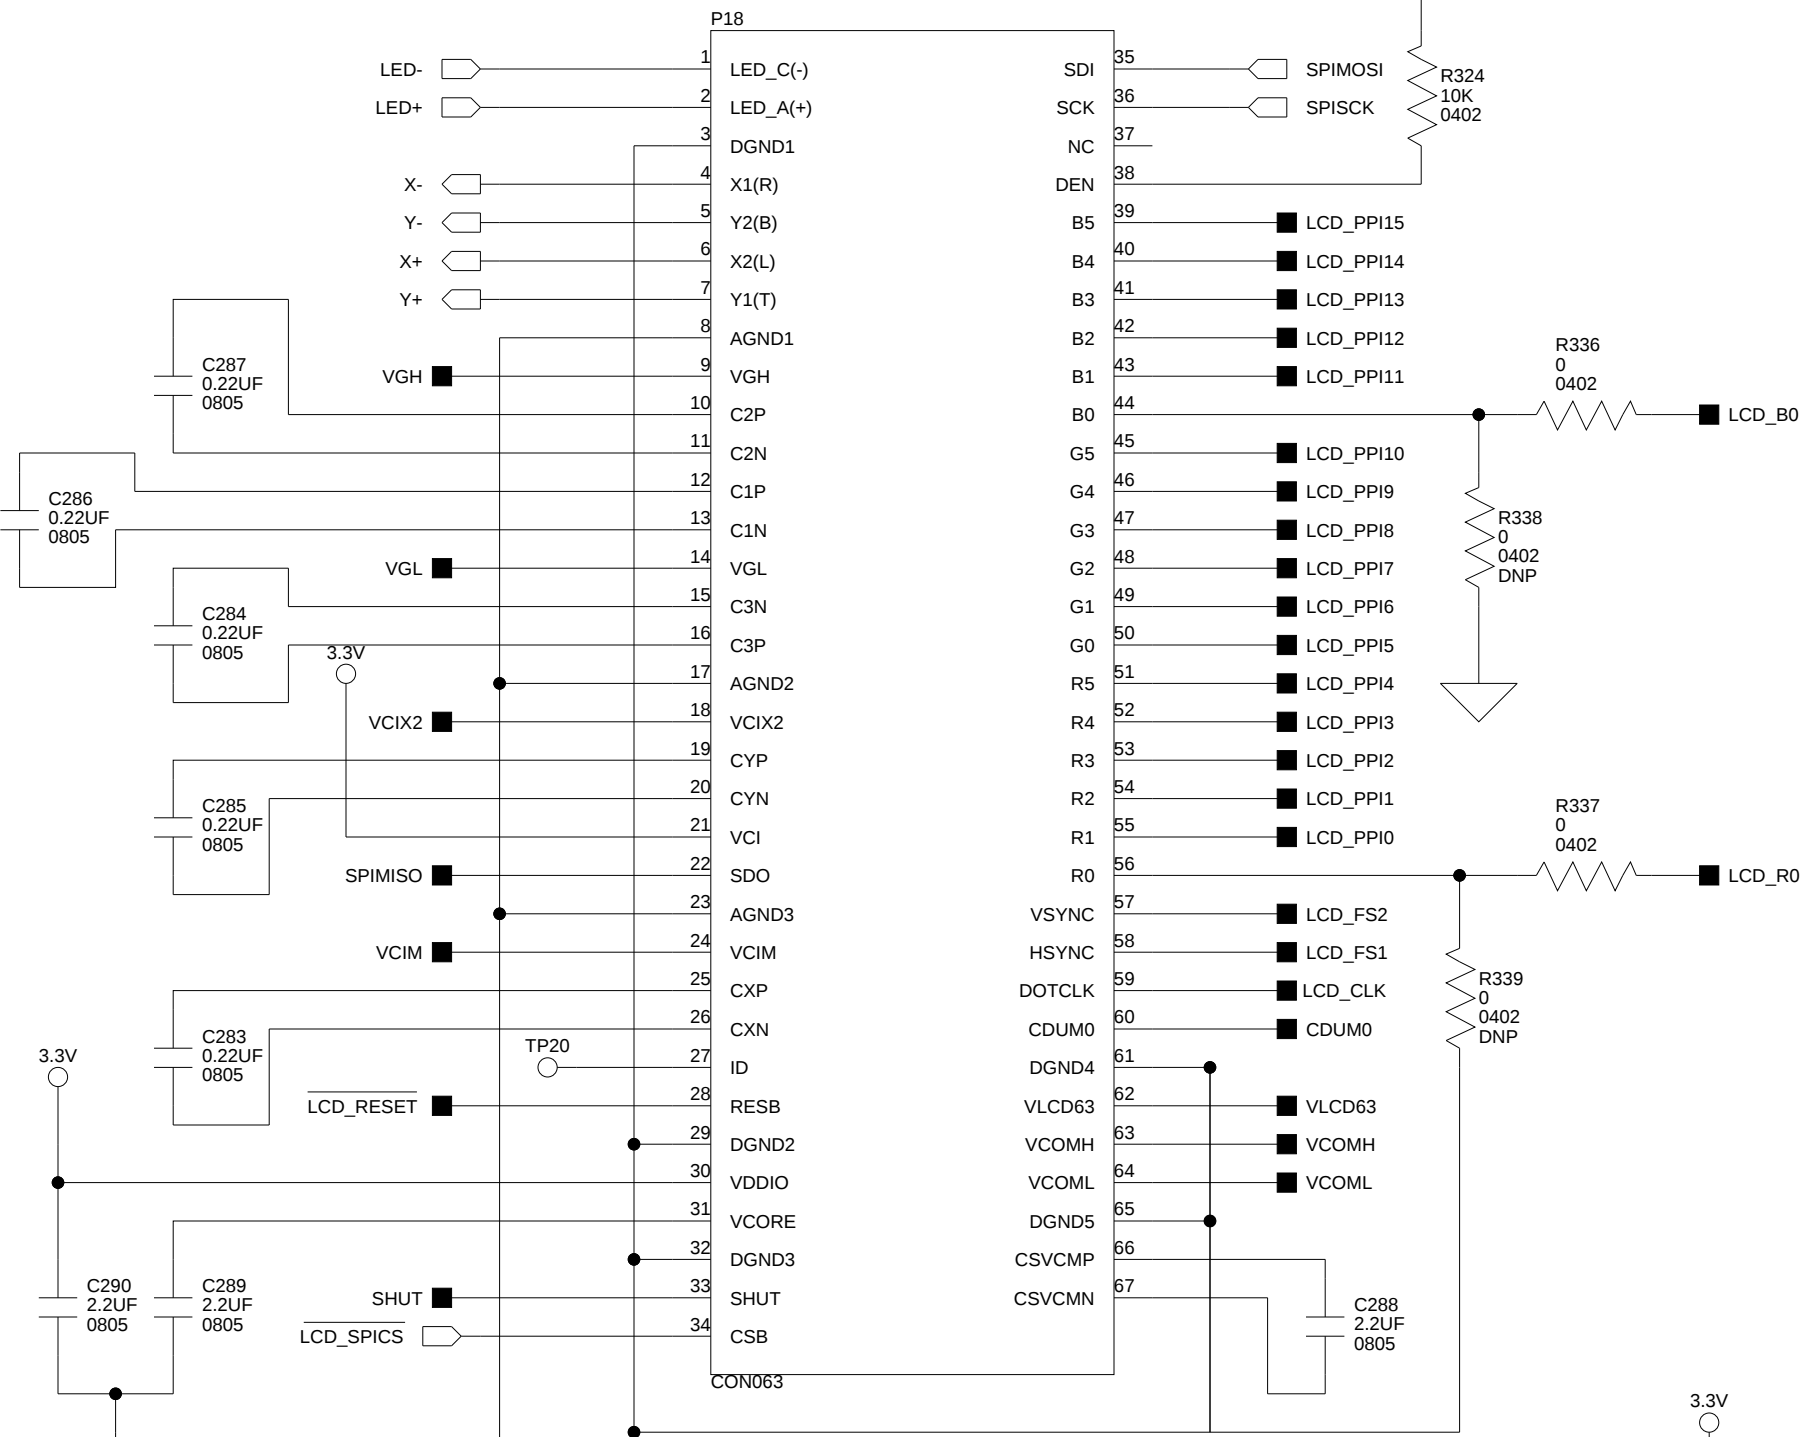


C294 should be very close to pin21=VCI in P18

"CPLD D8-13"

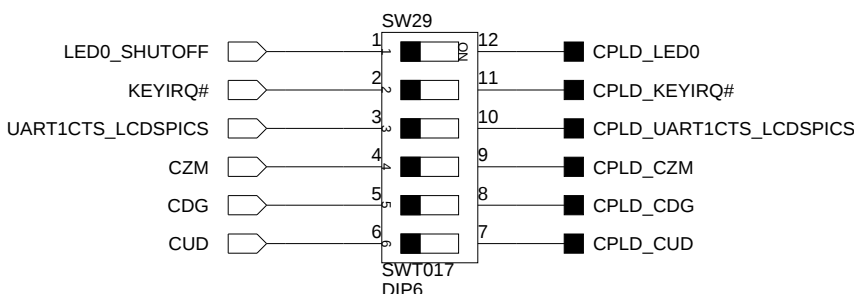

Allows CPLD PPI data lines 8-13 to be disconnected from processor.



20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD


Title ADSP-BF527 EZ-KIT Lite
LCD, CPLD

Size C Board No. A0208-2006

Date 1-27-2010_11:46


Sheet 10 of 15

4

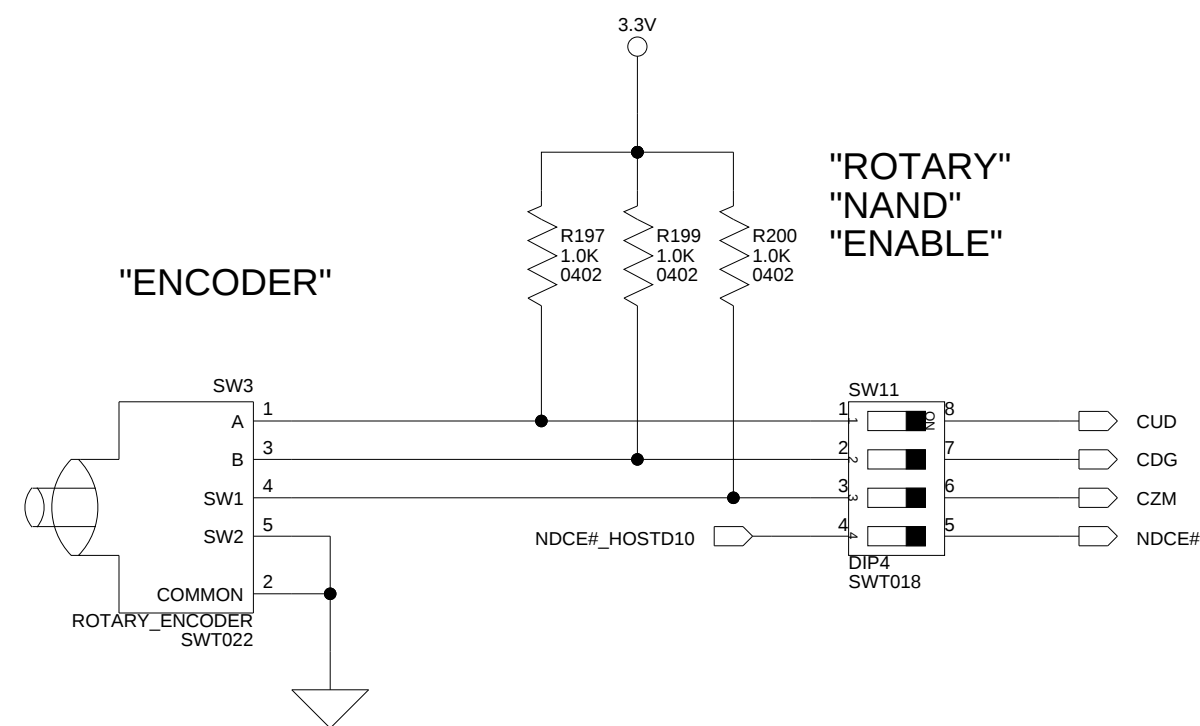


SW11: Rotary NAND enable

POS.	FROM	TO	DEFAULT	ALTERNATE FUNCTION / OFF MODE
SW11.1	Encoder (SW3)	DSP (U2, PF13)	ON	Expansion Interface (J2.34, J2.52) Stamp buffer (U34)
SW11.2	Encoder (SW3)	DSP (U2, PF12)	ON	Expansion Interface (J2.30, J2.51), Stamp buffer (U30)
SW11.3	Encoder (SW3)	DSP (U2, PF11)	ON	Expansion Interface (J2.32, J2.50), Stamp buffer (U30)
SW11.4	DSP (U2, PH10)	NAND (U4)	ON	Host connector (P13.11), Expansion Interface (J3.35)

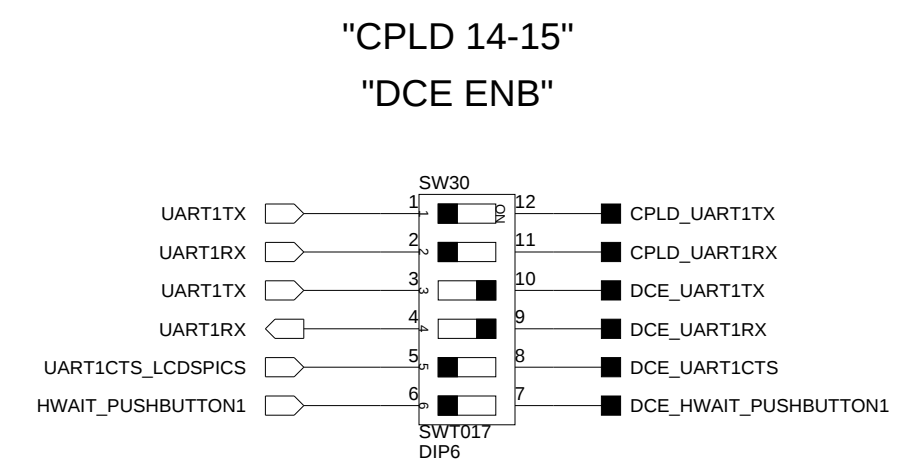

Allows CPLD PPI data lines 14-15 and UART1 signals to be disconnected from processor.

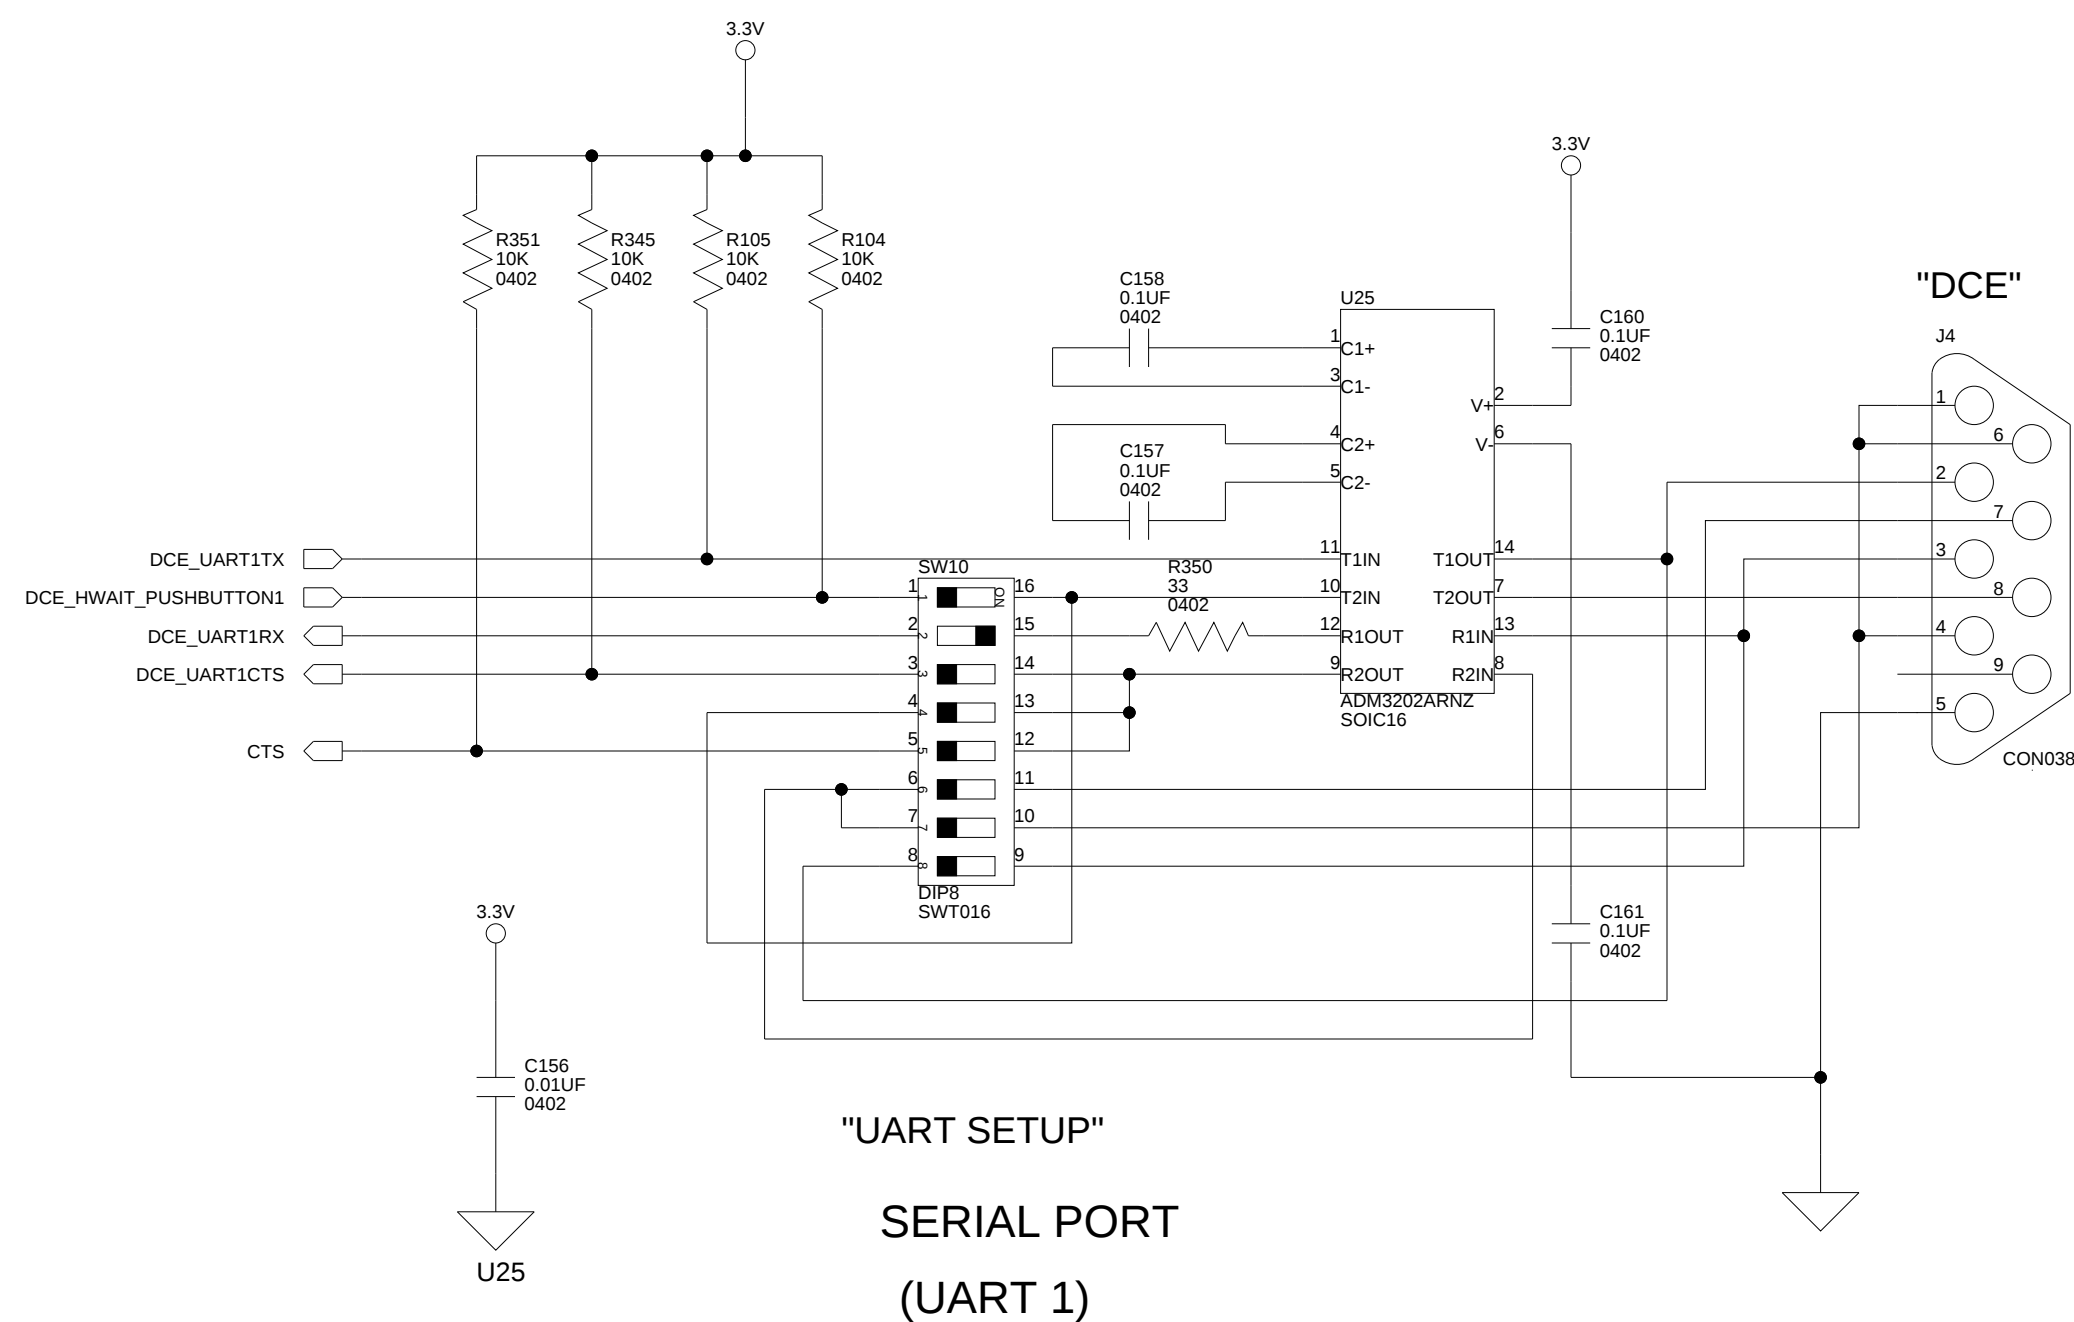

SW10: UART Setup

Position	Function
1 and 3	Enable flow control
2	Disconnects the UART_RX signal from the processor; the UART_RX signal can be used for another function
4	Connects the RTS and CTS signals
5	Allows the host to reset the EZ-KIT Lite via the CTS signal
6 and 7	Select the source for the CTS signal
8	Loopback RX and TX data

DEFAULT OFF, ON, OFF, OFF, OFF, OFF, OFF, OFF

1

2

3


4

1

2



3


4

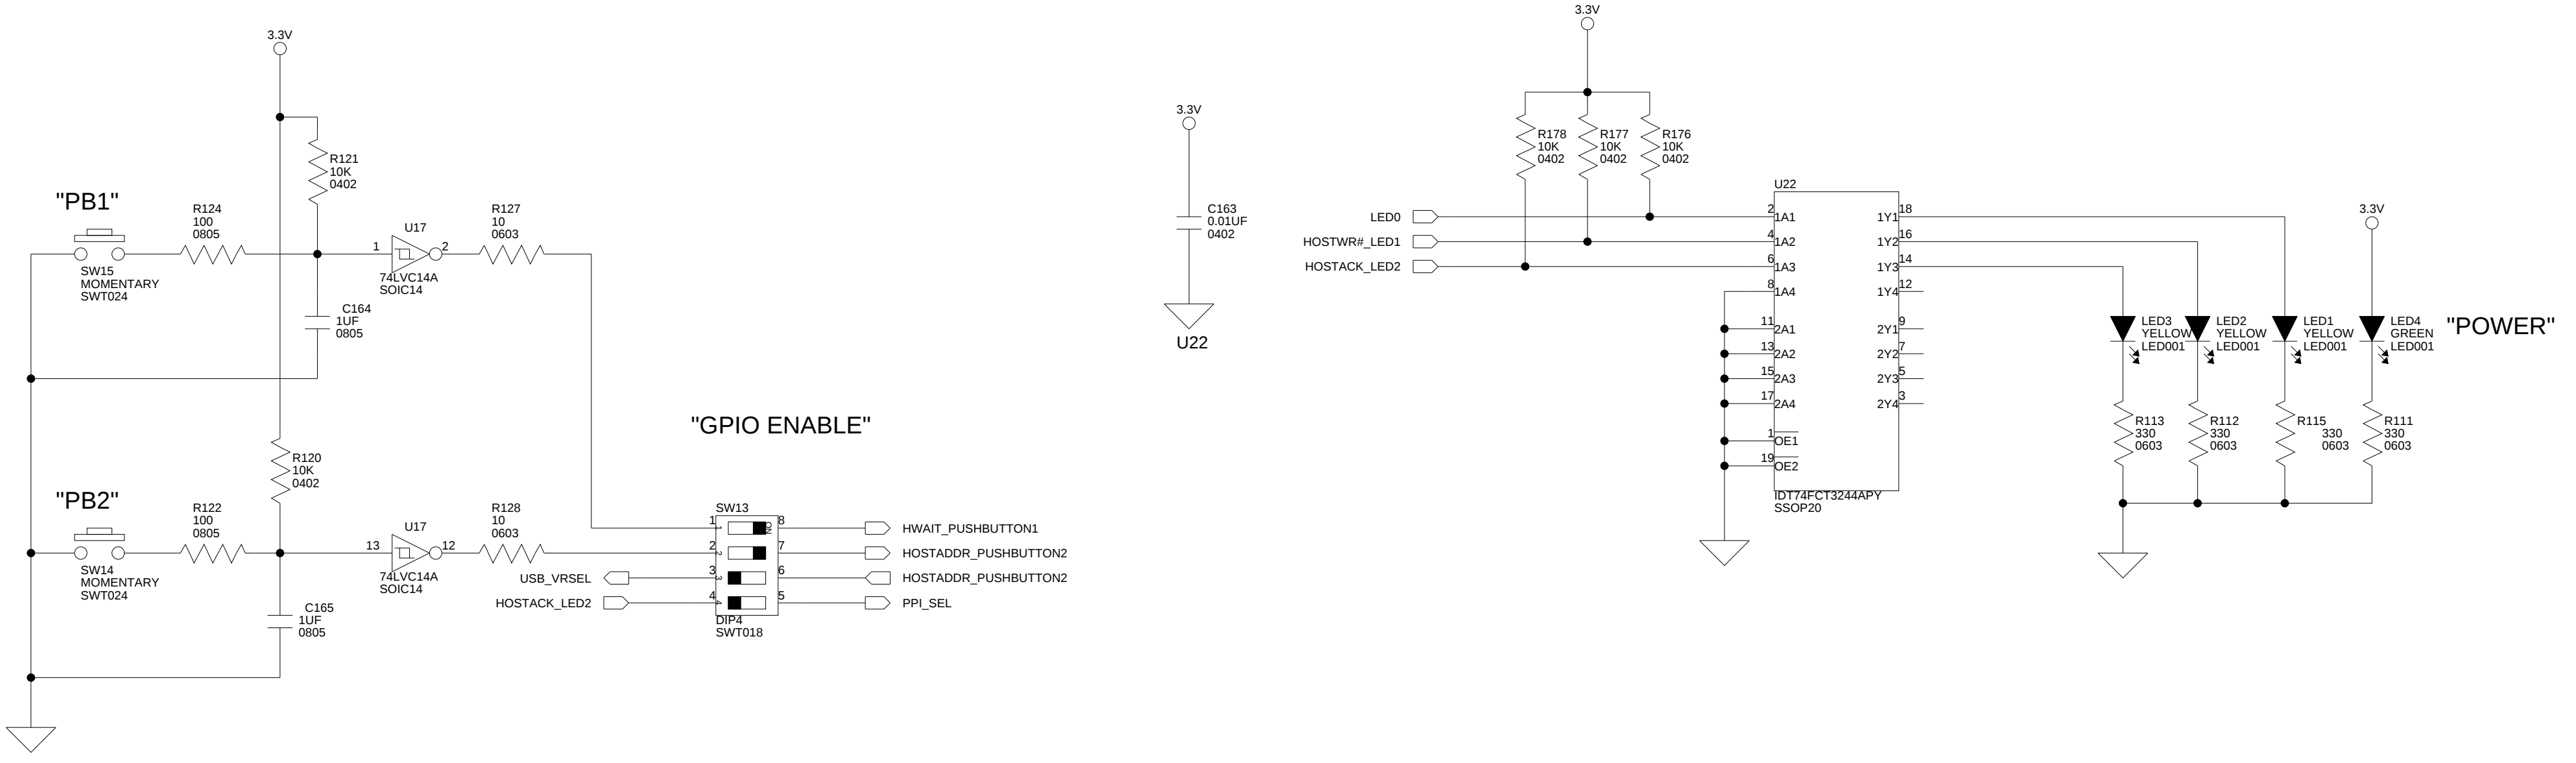

SW13: GPIO enable

POS.	FROM	TO	DEFAULT	FUNCTIONS
SW13.1	push button 1	DSP (U2, PG0)	ON	ON (PB1), OFF (UART 1 RTS U25, HOST connector P13.12, Keypad busy SW13.8, Expansion Interface J1.84)
SW13.2	push button 2	DSP (U2, PG13)	ON	ON (PB2), OFF (HOST connector P13.8, OTG voltage select SW13.7, Expansion Interface J1.85)
SW13.3	OTG PWR(VR3, U28)	DSP (U2, PG13)	OFF	OFF (HOST connector P13.8, Expansion Interface J1.85), ON (PB2 SW13.11, OTG power VR3, U28)
SW13.4	DSP(U2, PG12)	PPI CLK (U20)	OFF	OFF (LED2, Host connector P13.10, Expansion Interface J1.81, STAMP buffer U34), ON (PPI CLK U20)

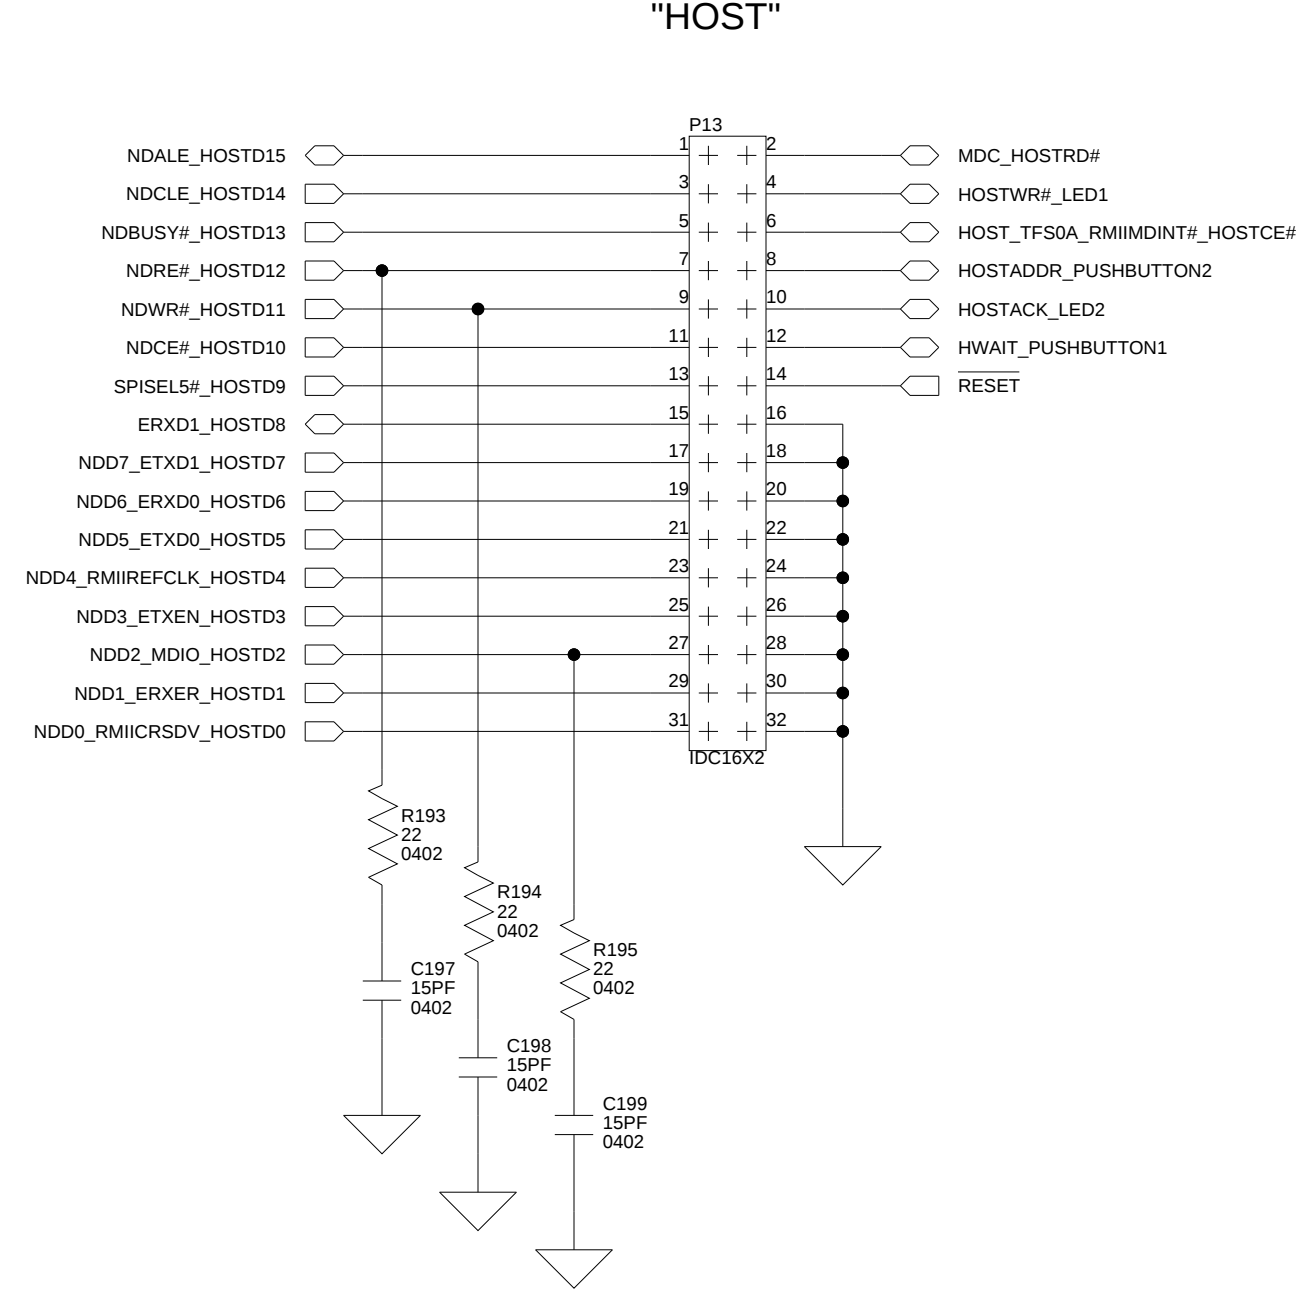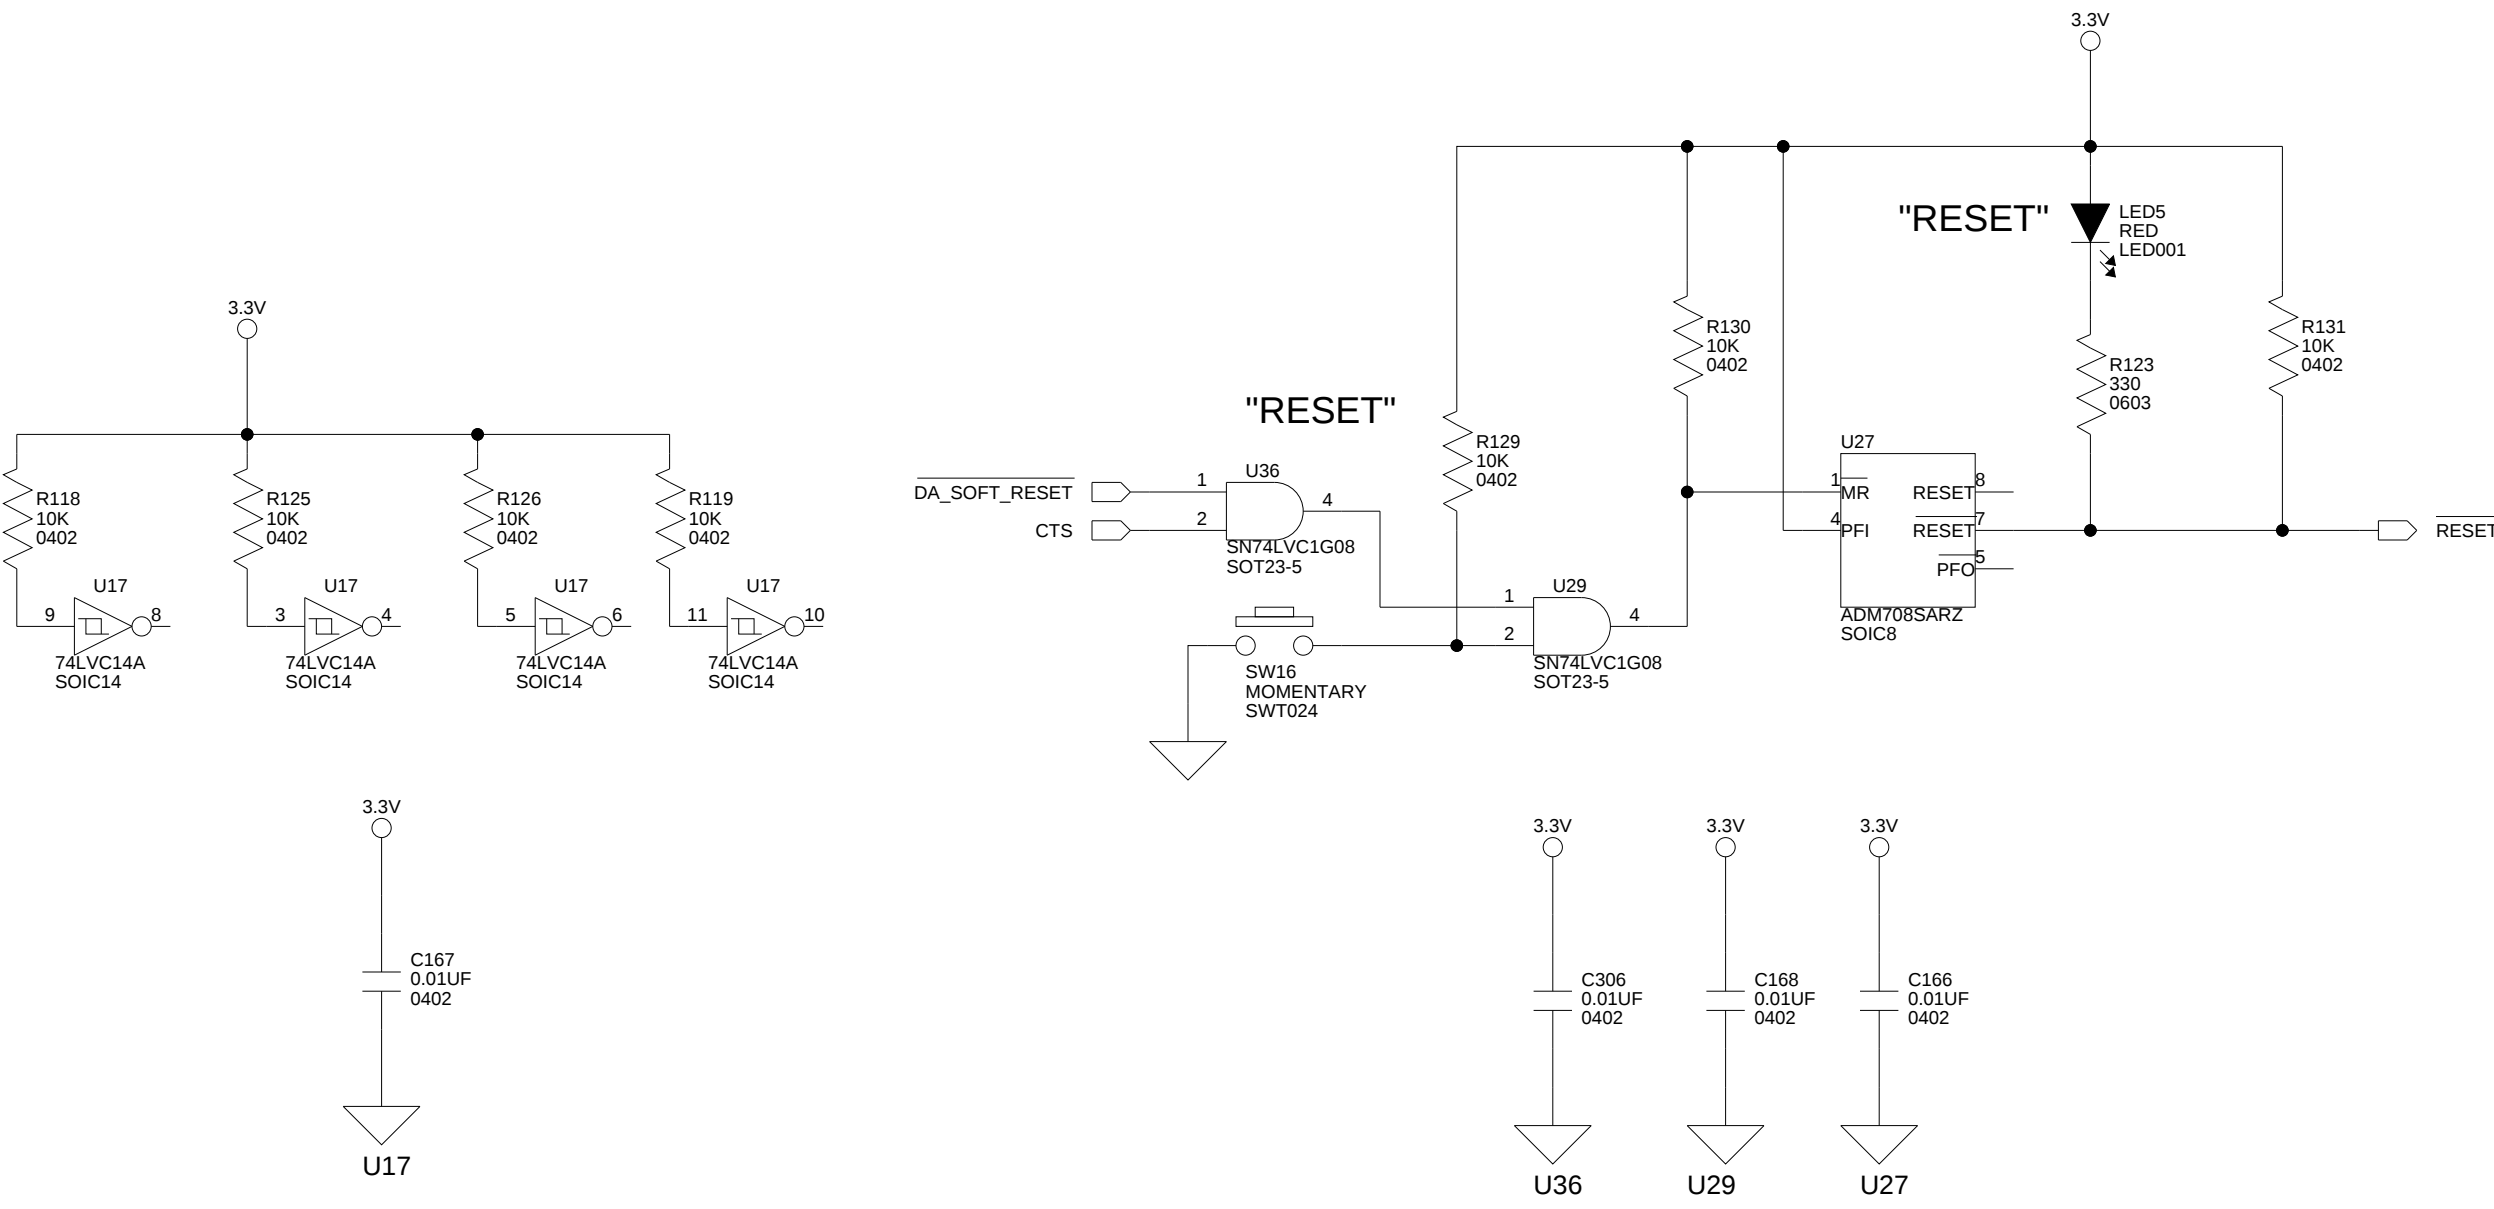



**ANALOG
DEVICES**

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title

ADSP-BF527 EZ-KIT Lite
LEDS, PUSHBUTTONS, RESET, HOST PORT

Size
C

Board No.

A0208-2006



Rev
2.2

Date

1-27-2010 11:46

Sheet

12 of 15










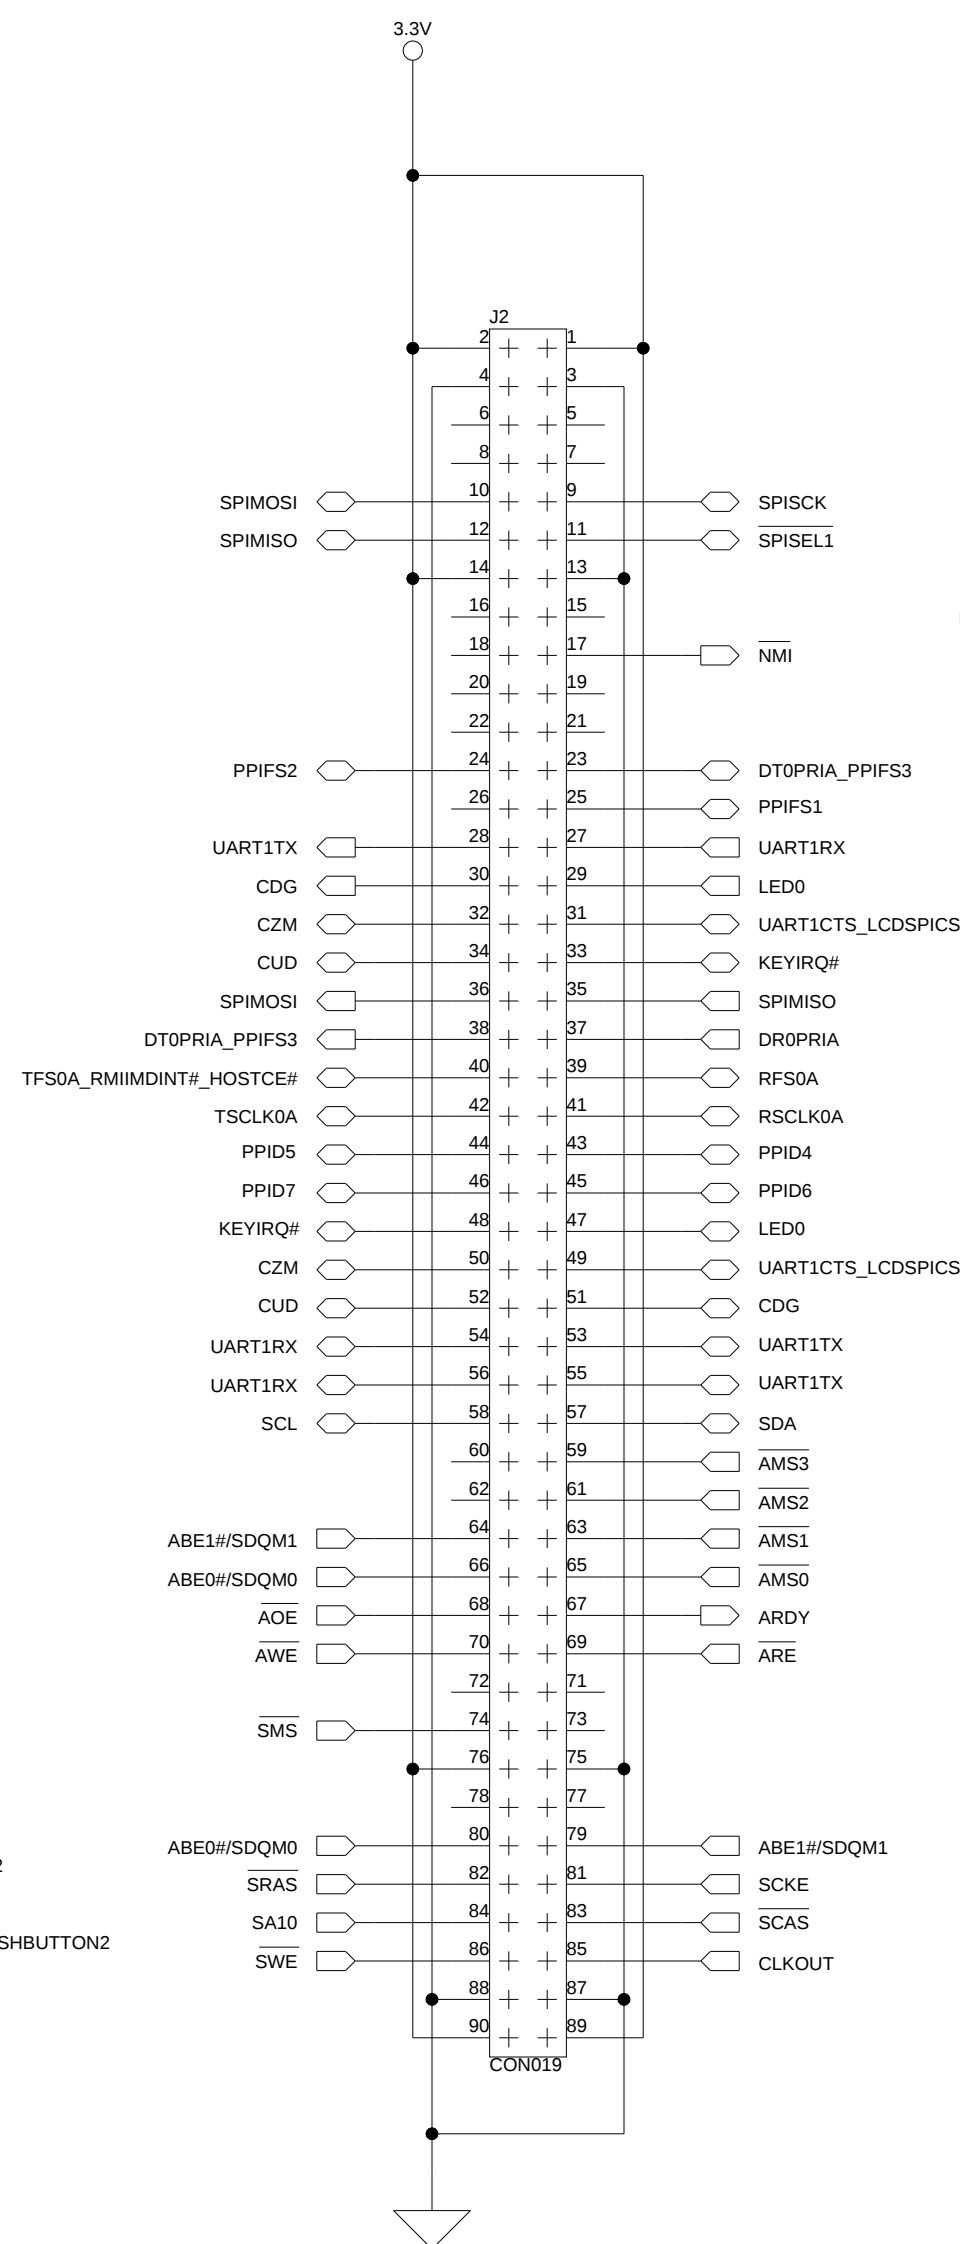


When designing your JTAG interface please refer to the Engineer to Engineer Note EE-68 which can be found at <http://www.analog.com>



20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD


Title ADSP-BF527 EZ-KIT Lite EXPANSION INTERFACE & JTAG				
Size C	Board No. A0208-2006			Rev 2.2
Date	1-13-2010 14:04		Sheet	13 of 15

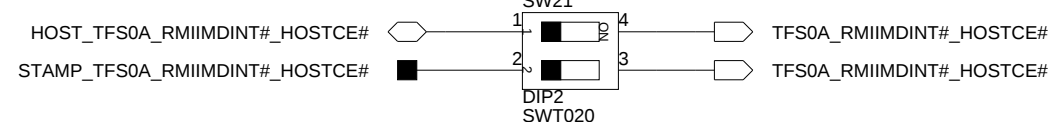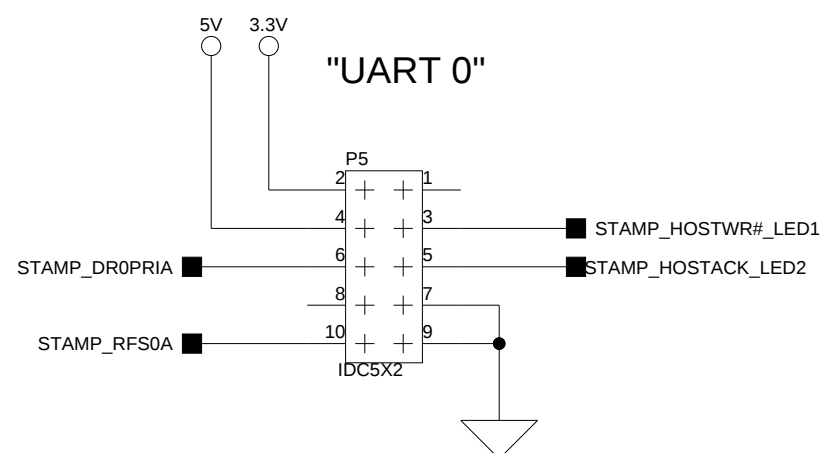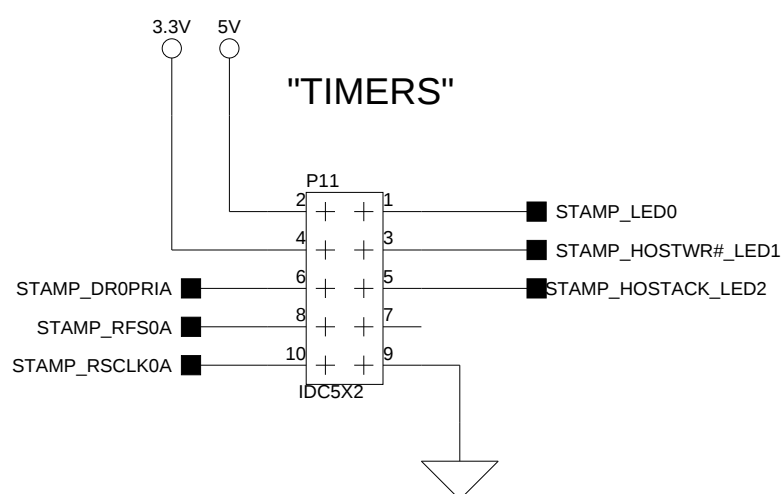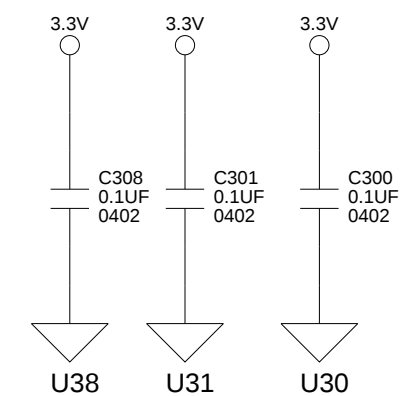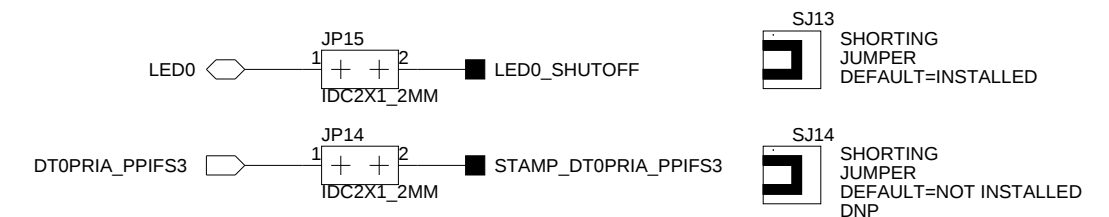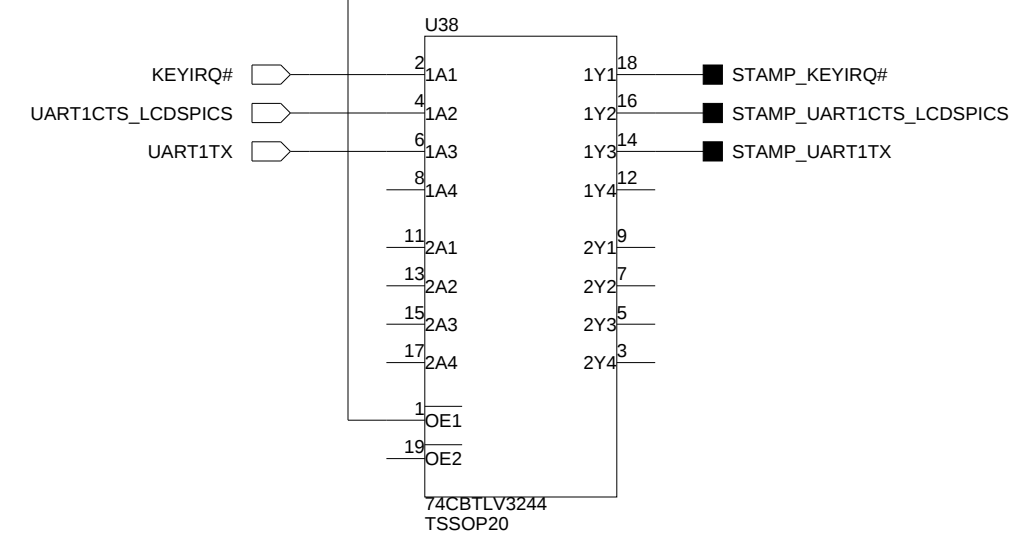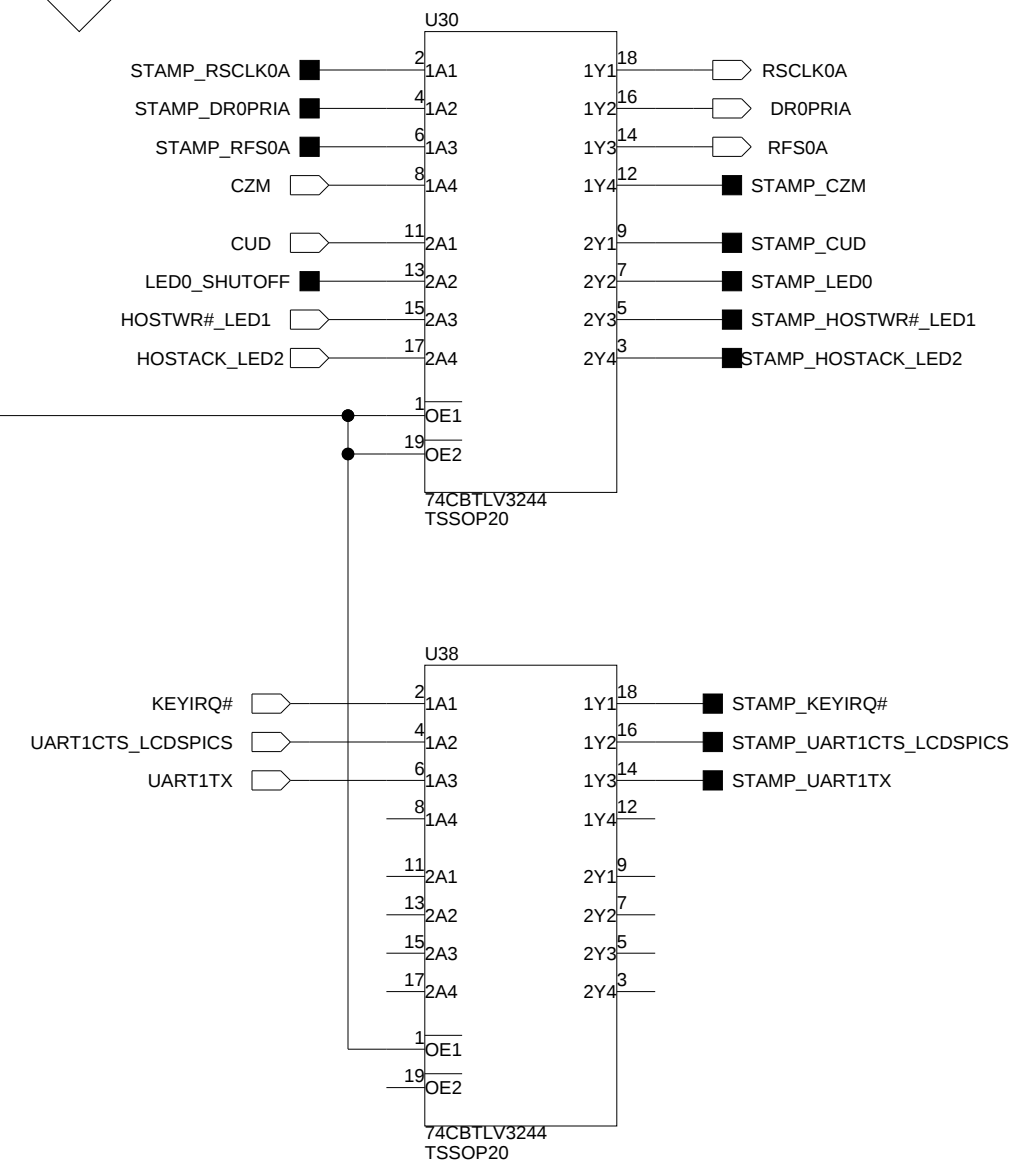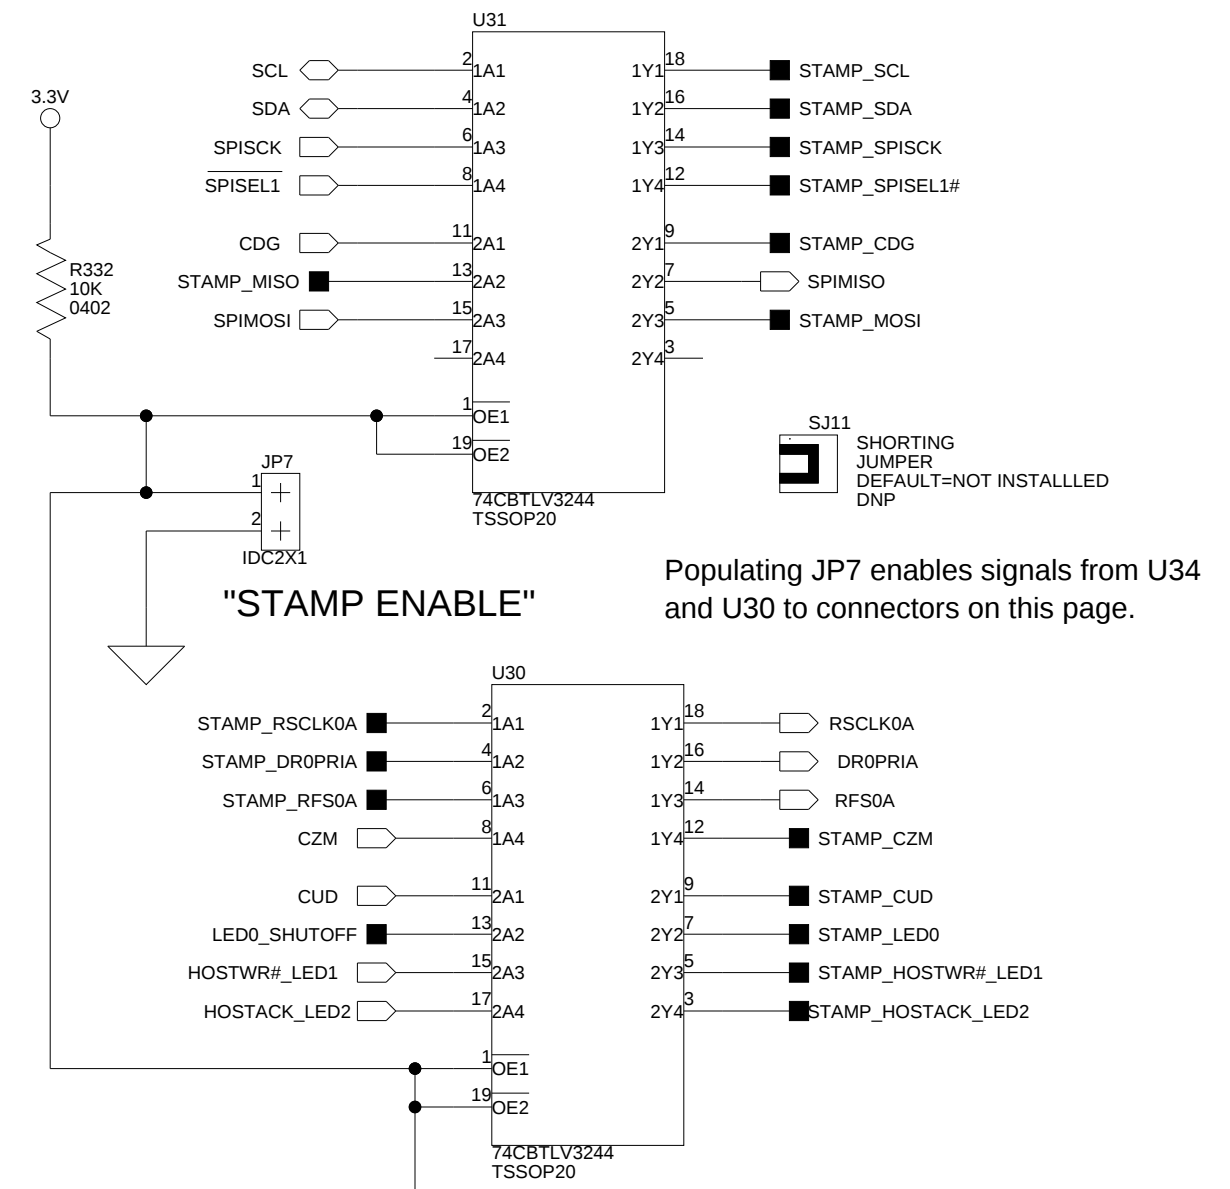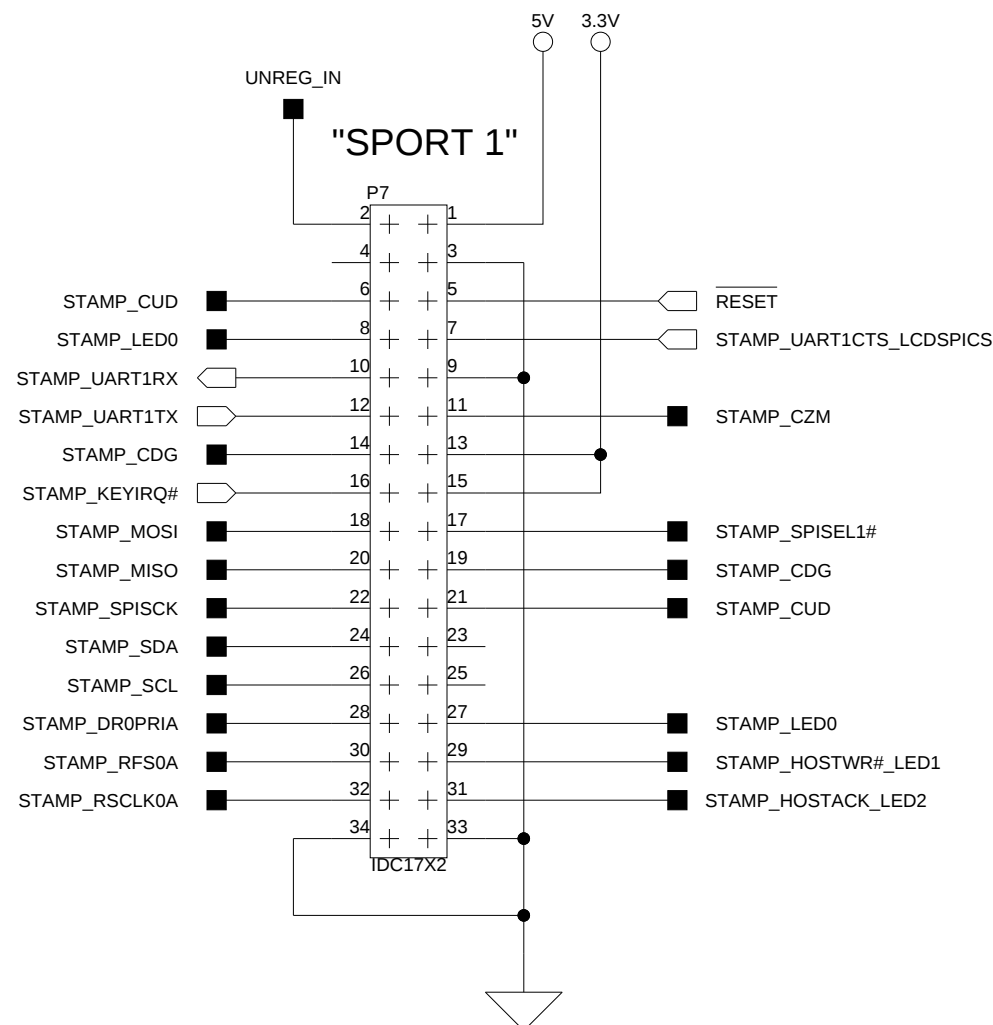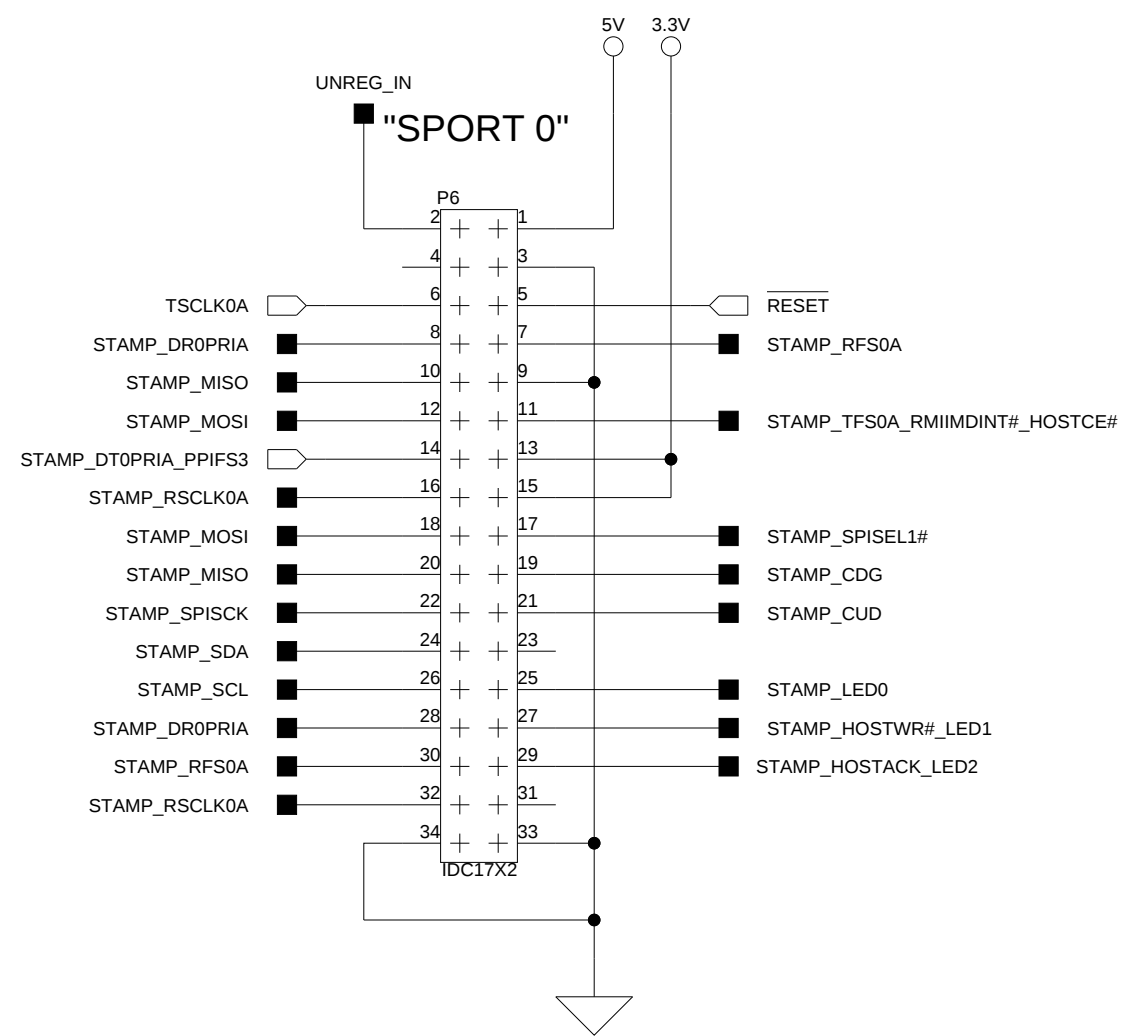

SW21 disconnects TFS0A_RMIIMDINT#_HOSTCE# from SPORT conn P6.11 and HOST conn P13.6

"TFS0A/HOSTCE"
"ENABLE"

		ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
Title		ADSP-BF527 EZ-KIT Lite STAMP CONNECTORS			
Size C	Board No.			A0208-2006	Rev 2.2
Date	1-20-2010 14:13			Sheet	14 of 15

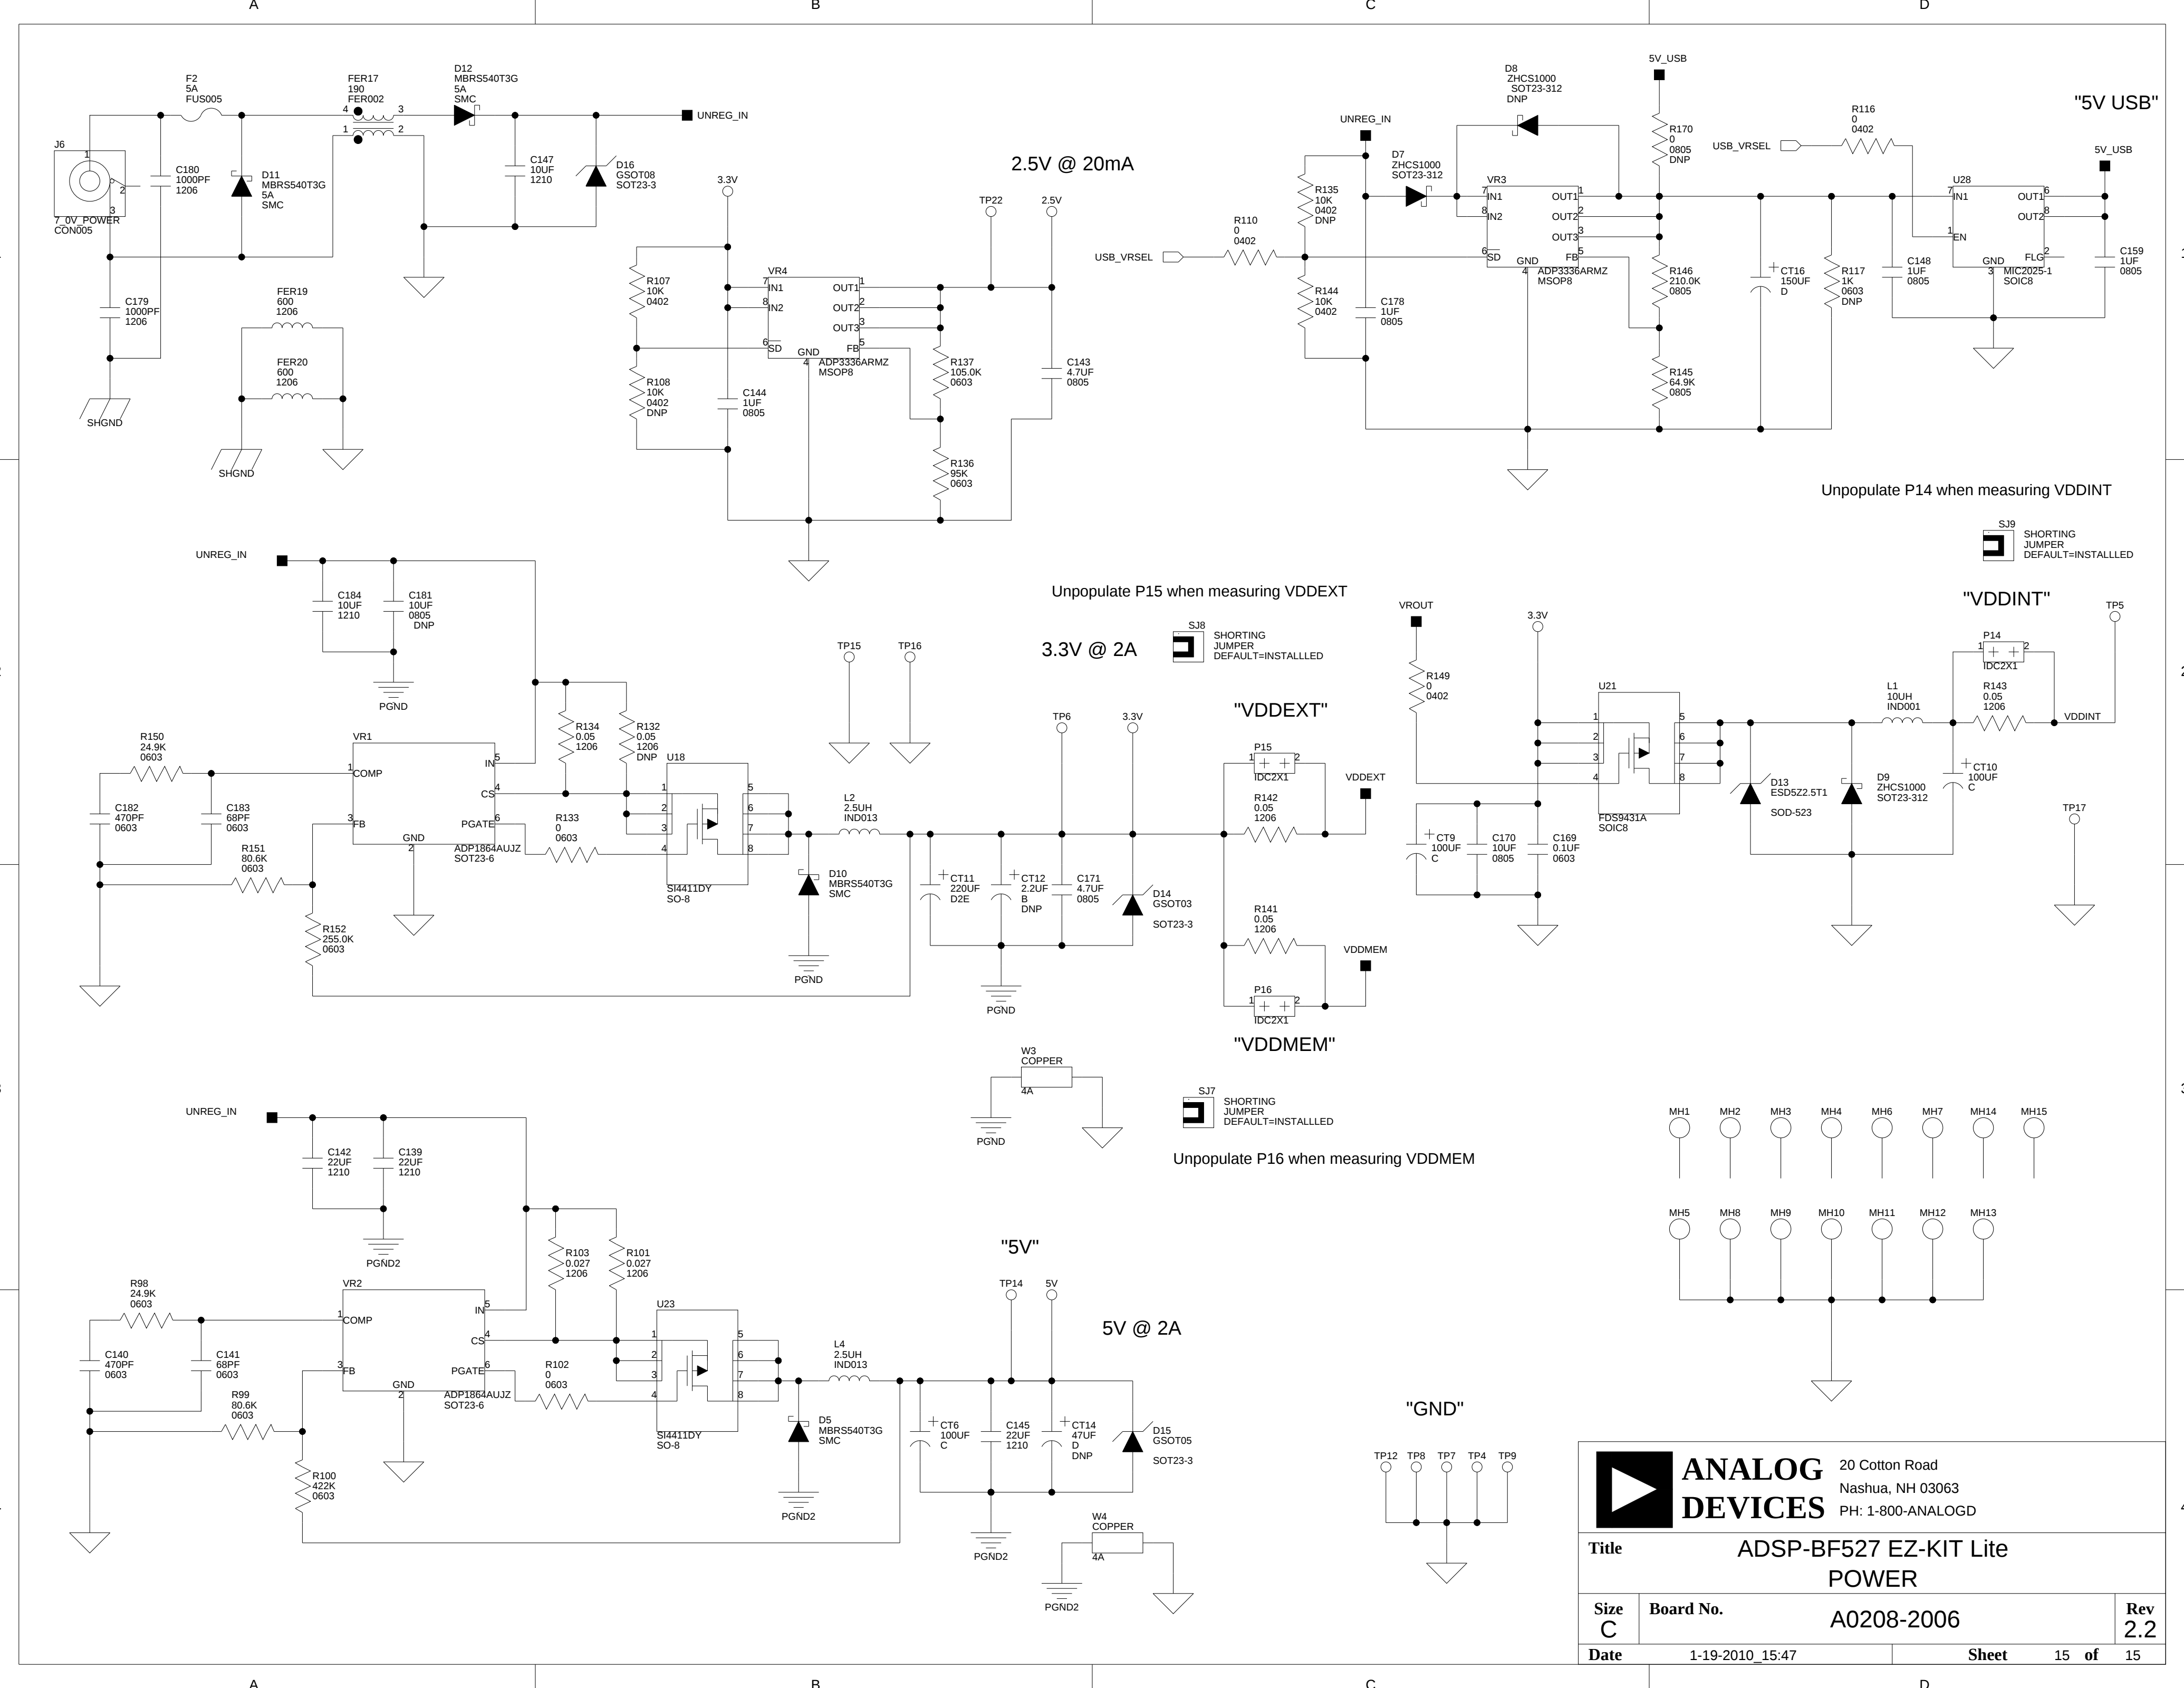

I INDEX

A

- AD7879_1_PENIRQ interrupt signal, [1-17](#)
- ADM3202 (U25) line driver/receiver, [1-22](#)
- AMS0-3 select lines, [1-12](#)
- analog audio interface, *See* audio interface
- architecture, of this EZ-KIT Lite, [2-2](#)
- ASYNC (asynchronous memory control)
 - external memory banks 0-3, [1-10](#)
- audio
 - interface, -ix, [1-19](#)
 - dual connectors (J7-8), [1-20](#), [2-30](#)
 - SPORT connect switch (SW20), [1-19](#), [2-19](#)
 - SPORT connect switch (SW27), [1-19](#), [2-19](#)

B

- background telemetry channel (BTC), [1-27](#)
- battery holder (J5), [2-29](#)
- bill of materials, [A-1](#)
- board schematic (ADSP-BF527), [B-1](#)
- boot
 - modes, [2-11](#)
 - mode select switch (SW2), [1-12](#), [1-14](#), [2-11](#)

C

- CCLK register, [1-12](#)
- clock in (CLK IN) signal, [2-3](#)
- audio codec, *See* audio interface
- code security, [1-7](#)
- configuration, of this EZ-KIT Lite, [1-4](#)

connectors

- diagram of locations, [2-28](#)
- J1-3 (expansion), [1-25](#), [2-28](#)
- J4 (RS-232), [2-29](#)
- J5 (battery), [2-29](#)
- J6 (power), [2-30](#)
- J7-8 (dual audio), [1-20](#), [2-30](#)
- J9 (Ethernet), [1-19](#), [2-30](#)
- P10 (TWI) interface, [2-33](#)
- P11 (timers), [2-33](#)
- P13 (host interface), [1-13](#), [2-34](#)
- P17 (JTAG CPLD), [2-34](#)
- P18 (LCD data), [2-34](#)
- P1 (USB OTG), [1-5](#), [1-21](#), [2-31](#), [2-35](#)
- P2 (keypad), [2-31](#)
- P5 (UART0), [1-22](#), [2-31](#)
- P6 (SPORT0), [2-32](#)
- P7 (SPORT1), [2-32](#)
- P8 (PPI), [2-32](#)
- P8 (PPI interface), [1-14](#)
- P9 (SPI), [2-33](#)
- ZJ1 (USB), [2-35](#)
- ZP4 (JTAG), [1-24](#), [2-35](#)

contents, of this EZ-KIT Lite package, [1-3](#)

core voltage, [2-2](#)

CPLD 14-15/DCE enable switch (SW30),
[1-20](#), [2-22](#)

CPLD D8-13 switch (SW29), [2-22](#)

CTS signal, [1-22](#)

customer support, [xiii](#)

Index

D

DCE (RS-232) connector (J4), [2-29](#)
debugger interface (ZJ1), [1-5](#)
default configuration, of this EZ-KIT Lite, [1-4](#)
design reference info, [1-27](#)
DIP switch (SW13), [1-15](#), [1-21](#), [1-24](#), [2-17](#),
[2-18](#)
down signal (CDG), [1-18](#)
DT0PRIA_PPIFS3 signal, [2-24](#)

E

EBIU_DDRCTL0-2 registers, [1-11](#)
Ethernet
 interface, [x](#), [1-18](#)
 connector (J9), [1-19](#), [2-30](#)
 enable switch (SW1), [1-18](#), [2-10](#)
 LEDs (LED6-7), [2-27](#)
 mode switch (SW9), [1-19](#), [2-14](#)
 PHY IC (U14), [1-13](#)
example programs, [1-27](#)
expansion interface, [1-13](#), [1-14](#), [1-18](#), [1-25](#),
[2-13](#), [2-15](#), [2-28](#)
external memory, [1-8](#), [1-10](#)

F

features, of this EZ-KIT Lite, [ix](#)
FET switch (U28), [1-21](#)
flag pins, *See* programmable flags by name (PFx,
 PGs, PHx, PJx)
flash memory
 See also parallel flash memory
 enable switch (SW7), [2-13](#)

G

general-purpose IO pins, [1-23](#), [2-11](#), [2-15](#),
[2-16](#), [2-17](#), [2-18](#), [2-26](#)

H

HOSTACK_LED2 signal, [1-15](#)
HOSTACK signal, [1-24](#)
HOSTADDR signal, [1-21](#), [1-24](#)
HOSTCE# signal, [1-19](#)
HOSTD9 signal, [1-14](#)
host interface connector (P13), [1-13](#), [2-34](#)
HOSTWR#_LED1 signal, [1-16](#), [2-13](#)
HOSTWR signal, [1-24](#)
HWAIT port, [1-22](#), [1-24](#)

I

I2C address, [1-17](#)
ILED pin, [1-17](#)
installation, of this EZ-KIT Lite, [1-4](#), [1-5](#)
IO voltage, [2-2](#)

J

JTAG
 interface, [1-24](#)
 connector (ZP4), [1-24](#), [2-35](#)
 CPLD connector (P17), [2-34](#)
jumpers
 diagram of locations, [2-23](#)
 JP14 (stamp enable), [2-24](#)
 JP15 (LED0 off), [2-24](#)
 JP5 (UART1 loopback), [2-24](#)
 JP6 (mic select), [1-20](#), [2-23](#)
 JP7 (STAMP enable), [2-23](#)
 P14 (VDDINT power), [1-26](#), [2-24](#)
 P15 (VDDEXT power), [1-26](#), [2-25](#)
 P16 (VDDMEM power), [1-26](#), [2-25](#)

K

KEYIRQ signal, [1-17](#)

- keypad interface
 - connections, [1-17](#)
 - components, [x](#)
 - connector (P2), [2-31](#)
 - current sink LED (LED8), [2-27](#)
 - LCD reset switch (SW5), [1-24](#), [2-13](#)
 - LCD SPI/IRQ select switch (SW25), [1-14](#), [1-17](#), [2-20](#)

L

- LCD module
 - See also* touchscreen
 - interface, [x](#), [1-14](#), [1-15](#)
 - data connector (P18), [2-34](#)
 - mode switch (SW26), [1-16](#), [2-21](#)
 - SPI/keypad control switch (SW25), [1-14](#), [1-17](#), [2-20](#)
- $\sim$ LCD_RESET line, [2-13](#)
- LED0 off jumper (JP15), [2-24](#)
- LED1_CURRENT signal, [2-27](#)
- LED1_EN register, [2-27](#)
- LEDs
 - diagram of locations, [2-26](#)
 - LED0 (SW24 switch), [1-17](#)
 - LED1-3 (PF8, PG11-12), [1-23](#), [1-26](#), [2-26](#)
 - LED4 (power), [2-27](#)
 - LED5 (reset), [2-27](#)
 - LED6-7 (Ethernet), [2-27](#)
 - LED8 (keypad current sink), [1-17](#), [2-27](#)
 - ZLED3 (USB monitor), [1-5](#)
- license restrictions, [viii](#), [1-7](#)
- line in-out loopback switch (SW28), [2-21](#)
- LINEIN signal, [1-20](#)
- LINOUT signal, [1-20](#)
- lockbox key, [1-7](#)
- loopback switch (SW28), [2-21](#)

M

- MAC address, [1-19](#)

- media independent interface (MII), [1-18](#)
- Media Instruction Set Computing (MISC), [vii](#)
- memory map, of this EZ-KIT Lite, [1-8](#)
- MICBIAS signal, [1-20](#), [2-23](#)
- MICIN signal, [1-20](#), [2-23](#)
- microphone
 - gain switch (SW4), [2-12](#)
 - loopback switch (SW8), [1-20](#), [2-14](#)
 - select jumper (JP6), [1-20](#), [2-23](#)
- Micro Signal Architecture (MSA), [vii](#)
- momentary switch (SW3), [1-18](#), [2-12](#)

N

- NAND flash memory
 - interface, [ix](#), [1-13](#)
 - enable switch (SW11), [1-13](#), [2-16](#)
- NDCE#_HOSTD10 signal, [1-13](#)
- NINT keypad interrupt signal, [1-17](#)
- notation conventions, [xviii](#)

O

- oscilloscope, [1-26](#)

P

- package contents, [1-3](#)
- parallel flash memory, [ix](#), [1-12](#)
- parallel peripheral interface (PPI), *See* PPI interface
- PF0-7 signals, [2-3](#)
- PF8 signal, [2-3](#)
- PF9-15 signals, [2-3](#)
- PG0-10 signals, [2-5](#)
- PG11-12 (IO) signals, [1-15](#), [1-16](#), [2-5](#), [2-26](#)
- PG13 (IO) signal, [1-21](#), [2-5](#)
- PG14-15 (IO) signals, [2-5](#)
- PG8 (IO) signal, [2-26](#)
- PH0-9 signals, [2-7](#)
- PH10 signal, [2-7](#)

Index

PH11-15 signals, [2-7](#)
PJ0-3 signals, [2-9](#)
PLL_CTL register, [1-12](#)
PLL_DIV register, [1-12](#)
POST (power-on-self test) program, [1-12](#), [1-14](#),
[1-26](#), [2-23](#)
power
 connector (J6), [2-30](#)
 LED (LED4), [2-27](#)
 measurements, [1-26](#)
 supply, [1-3](#)
PPI interface
 connections, [1-15](#)
 config for LCD module, [1-15](#)
 connector (P8), [1-14](#), [2-32](#)
PPI_SEL signal, [1-15](#)
push buttons (PB1-2), [1-24](#)
push buttons (SW14-15), [2-18](#)

R

real-time clock (RTC) interface, [1-23](#), [2-3](#)
Reduced Instruction Set Computing (RISC),
[vii](#)
reduced media independent interface (RMII),
[1-18](#)
reset
 LED (LED5), [2-27](#)
 push button (SW16), [2-18](#)
~RESET line, [2-13](#)
restrictions, of evaluation license, [1-7](#)
RMIIMDINT signal, [1-19](#)
rotary encoder
 interface, [1-18](#)
 enable switch (SW11), [1-18](#), [2-16](#)
 switch (SW3), [1-18](#), [2-12](#)
RS-232 connector (J4), [2-29](#)
RTC power pin, [1-23](#)
RTS signal, [1-22](#)

S

schematic, of ADSP-BF527 EZ-KIT Lite, [B-1](#)
SDRAM interface, [1-10](#)
serial peripheral interconnect (SPI) ports, *See*
 SPI
SPI interface
 codec control, [1-20](#)
 config switch (SW19), [1-20](#)
 connector (P9), [2-33](#)
SPISEL1 signal, [1-14](#)
SPISEL5 signal, [1-14](#)
SPISEL7 signal, [1-14](#)
SPORT0A
 enable switch (SW20), [1-19](#), [2-19](#)
 enable switch (SW27), [1-19](#), [2-19](#)
SPORT0 connector (P6), [2-32](#)
SPORT1 connector (P7), [2-32](#)
SRAM memory, [1-8](#)
STAMP connectors
 enable jumper (JP7), [2-23](#)
 UART0 (P5), [1-22](#)
stamp enable jumper (JP14), [2-24](#)
startup, of this EZ-KIT Lite, [1-5](#)
SW10 (UART1 enable) switch, [1-22](#), [2-15](#)
SW11 (NAND enable) switch, [1-18](#), [2-16](#)
SW13 (push button enable) DIP switch, [1-15](#),
[1-21](#), [1-24](#), [2-17](#), [2-18](#)
SW14-15 (PF) push buttons, [2-18](#)
SW16 (reset) push button, [2-18](#)
SW19 (SPI/TWI config) switch, [1-20](#)
SW1 (Ethernet enable) switch, [1-18](#), [2-10](#)
SW20 (audio and SPORT enable) switch, [1-19](#),
[2-19](#)
SW21 (TFS0A/HOSTCE enable) switch, [1-19](#),
[2-19](#)
SW22 (touch address) switch, [1-17](#), [2-19](#)
SW24 (touchpad interrupt) switch, [1-17](#), [2-20](#)
SW25 (LCD/keypad control) switch, [1-14](#),
[1-17](#), [2-20](#)
SW26 (LCD mode) switch, [1-16](#), [2-21](#)

- SW27 (audio and SPORT enable) switch, [1-19](#), [2-19](#)
 - SW28 (line in-out loopback) switch, [2-21](#)
 - SW29 (CPLD D8-13) switch, [2-22](#)
 - SW2 (boot mode select) switch, [1-12](#), [1-14](#), [2-11](#)
 - SW30 (CPLD 14-15/DCE enable) switch, [1-20](#), [2-22](#)
 - SW3 (rotary) switch, [1-18](#), [2-12](#)
 - SW4 (mic gain) switch, [1-20](#), [2-12](#)
 - SW5 (LCD reset) switch, [1-24](#), [2-13](#)
 - SW7 (flash enable) switch, [2-13](#)
 - SW8 (mic loopback) switch, [1-20](#), [2-14](#)
 - SW9 (Ethernet mode) switch, [1-19](#), [2-14](#)
 - switches
 - See also* switches by name (SWx)
 - diagram of locations, [2-10](#)
 - synchronous dynamic random access memory, *See* SDRAM
 - system architecture, of this EZ-KIT Lite, [2-2](#)
- T**
- TFS0A/HOSTCE enable switch (SW21), [1-19](#), [2-19](#)
 - TFS0A signal, [1-19](#)
 - TFSOA_RMIIMDINT#_HOSTCE# signal, [1-20](#)
 - thumbwheel control, [x](#)
 - timers connector (P11), [2-33](#)
 - touchpad interrupt switch (SW24), [1-17](#), [2-20](#)
 - touchscreen address switch (SW22), [1-17](#), [2-19](#)
 - two-wire interface (TWI)
 - config switch (SW19), [1-20](#)
 - connector (P10), [2-33](#)
 - selecting for codec, [1-20](#)
- U**
- UART0 interface connector (P5), [1-22](#), [2-31](#)
 - UART1 interface
 - enable switch (SW10), [1-22](#), [2-15](#)
 - loopback jumper (JP5), [2-24](#)
 - UART1_RX signal, [2-23](#)
 - UART1_TX signal, [2-23](#), [2-24](#)
 - universal asynchronous receiver transmitter, *See* UART0, UART1
 - up signal (CUD), [1-18](#)
 - USB
 - debug agent connector (ZJ1), [2-35](#)
 - OTG interface connector (P1), [1-5](#), [1-21](#), [2-31](#), [2-35](#)
 - voltage regulators, [1-21](#)
 - USB_VRSEL signal, [1-21](#), [1-24](#)
- V**
- VDDEXT
 - pin, [1-26](#)
 - power jumper (P15), [1-26](#), [2-25](#)
 - VDDINT
 - pin, [1-26](#)
 - power jumper (P14), [1-26](#), [2-24](#)
 - VDDMEM
 - pin, [1-26](#)
 - power jumper (P16), [1-26](#), [2-25](#)
 - very-long instruction word (VLIW), [vii](#)
 - VisualDSP++ environment, [1-5](#)
 - voltage planes, [1-23](#), [1-25](#), [2-17](#)
 - VR3 (USB voltage) regulator, [1-21](#)
- W**
- watchdog timer, [1-23](#)