
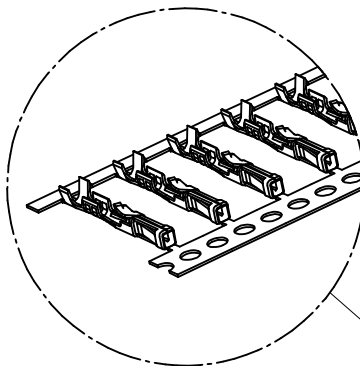



10 9 8 7 6 5 4 3 2 1

SEE NOTE 7



16-02-0139

INTERLEAF PAPER

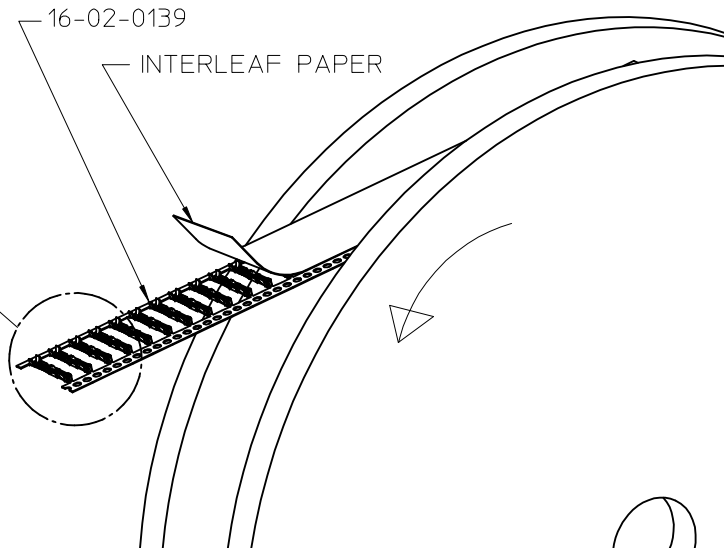

(12.88)
.507

(0.08) MAX.
.003 CUT-OFF



(1.32)
.052

(2.18 ± .10)
.086 ± .004

(1.52)
.060


(.22 ± .06)
.0085 ± .0025

NOTES:

1. TERMINAL TO BE USED IN HOUSING 70066-**** AND 70450-****.
2. REFER TO PRODUCT SPECIFICATION PS-70058.
3. REFER TO MOLEX OPERATIONS AND SERVICE MANUAL FOR CRIMP DETAILS.
4. TERMINAL TO BE USED WITH (0.64)/.025 SQUARE PINS.
5. TERMINAL TO BE USED WITH 24-30 AWG STRANDED WIRE WITH (1.52)/.060 MAXIMUM DIAMETER INSULATION.
6. TERMINALS SUPPLIED IN REEL FORM.
7. CRIMP SIZE INDICATOR A=24-30 AWG

PLATING:

.000050 MINIMUM GOLD PLATE IN SELECT AREA,
.000075 MINIMUM TIN PLATE IN SELECT AREA,
OVER NICKEL PLATE OVERALL.

REEL UNWIND DIR EC NO: UCP2013-5345 DRAWN: RWHIPPLE 2013/06/11 CHKD: DMORGAN 2013/06/11 APPR: SMILLER 2013/07/09	QUALITY SYMBOLS <div>▽_A=0</div> <div>▽_E=0</div> <div>▽_F=0</div>	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 10:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY RWHIPPLE	DATE 2013/06/11	TITLE TERMINAL - BOX/CRIMP FOE 24-30 AWG ON A REEL	
			4 PLACES	± ---	± ---	CHECKED BY JAS	DATE 1988/02/03		
			3 PLACES	± ---	± .005			molex	
			2 PLACES	± 0.13	± .01	APPROVED BY	DATE		
			1 PLACE	± 0.25	± ---	SMILLER	2013/07/09		
0 PLACE	± ---	± ---							
			ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 16-02-0139	DOCUMENT NO. SD-70058-0040		SHEET NO. 1 OF 1	
C	REV			SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				