

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 19160-0028
Status: Active
Overview: Splices
Description: Closed-End Insulated Splice for 8 AWG Wire, Tape and Reel

Documents:
Drawing (PDF) Packaging Specification PK-19408-109 (PDF)
Product Specification PS-19902-015 (PDF) RoHS Certificate of Compliance (PDF)

Agency Certification

CSA LR18689
UL E32244

General

Product Family Splices
Series 19160
Crimp Quality Equipment Yes
Mil-Spec N/A
Overview Splices
Product Name Closed-End Insulated
UPC 800753110335

Physical

Barrel Type Closed
Color - Resin Natural
Flammability 94V-2
Insulation Nylon (PA)
Material - Metal Copper
Material - Plating Mating Tin
Material - Plating Termination Tin
Net Weight 2.290/g
Packaging Type Adhesive Tape on Reel
Temperature Range - Operating 105°C
Wire Insulation Diameter 12.19mm max.
Wire Size AWG 8
Wire Size mm² 6.60 - 10.5

Electrical


Voltage - Maximum 600V

Material Info

Old Part Number NC-8T

Reference - Drawing Numbers

Packaging Specification PK-19408-109
Product Specification PS-19902-015
Sales Drawing SD-19160-001

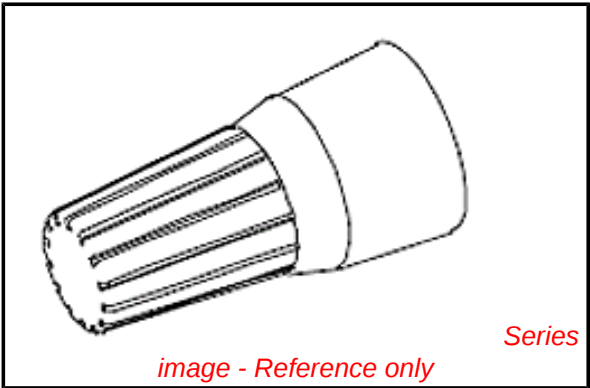

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Low-Halogen Status
Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
19160Series

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Crimp Dies for MTA-100 Tape Applicator used in 3BF Press, MTA-105 Tape Applicator used in TM-2000™ Press, and ATP-301 Air Crimping Press for Mylar Tape Mounted Terminals	0192880245

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION