

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:	<u>19160-0071</u>
Status:	Active
Overview:	Splices
Description:	Closed-End Insulated Splice for 14-22 AWG Wire, Tape and Reel

Documents:

[Drawing \(PDF\)](#)
[Packaging Specification PK-19408-109 \(PDF\)](#)
[Product Specification PS-19902-015 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR18689
UL	E32244

General

Product Family	Splices
Series	<u>19160</u>
Crimp Quality Equipment	Yes
Mil-Spec	N/A
Overview	<u>Splices</u>
Product Name	Closed-End Insulated
UPC	800753110786

Physical

Barrel Type	Closed
Color - Resin	Natural
Flammability	94V-2
Insulation	Nylon (PA)
Material - Metal	Copper
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.687/g
Packaging Type	Adhesive Tape on Reel
Temperature Range - Operating	105°C
Wire Insulation Diameter	6.86mm max.
Wire Size AWG	12, 14, 16, 18, 20, 22
Wire Size mm ²	0.25 - 4.00

Electrical

Voltage - Maximum 600V

Material Info

Old Part Number NC-2212T

Reference - Drawing Numbers

Packaging Specification	PK-19408-109
Product Specification	PS-19902-015
Sales Drawing	SD-19160-001

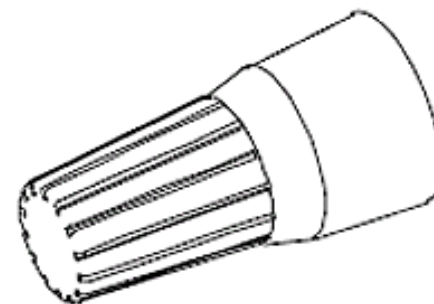


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen**



China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, click here

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

19160Series

Application Tooling | FAO

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Crimp Dies for MTA-100 Tape Applicator used in 3BF Press, MTA-105 Tape Applicator used in TM-2000™ Press, and ATP-301 Air Crimping Press for Mylar Tape Mounted Terminals	<u>0192880239</u>
Mini-Mac™ Applicator	<u>0638853500</u>

This document was generated on 10/21/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION