

SPRING-LOADED CONNECTORS

SERIES 419, 430, 499 • 2,54 GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • DOUBLE ROW STRIPS




FIG. 1

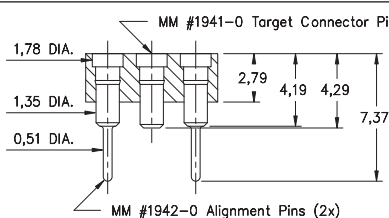


FIG. 2

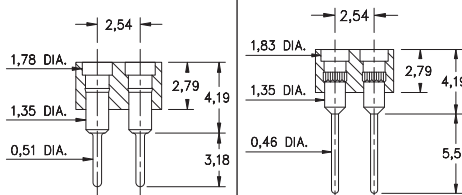


FIG. 3

FIG. 4

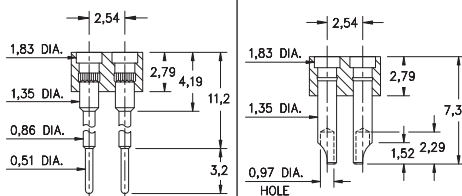


FIG. 5

FIG. 6





FIG. 7

- Series 419, 430 and 499 Spring Target Connectors, supplied in double row strips
- Spring Target Connectors present a large flat surface for making contact with our standard 1,07 dia. spring pin plungers. The target connectors provide an excellent gold-plated conductive path back to the board mounted spring pin connector
- Target connectors use MM #1938, #1940, #1941, #1942 and #3024 pins. See page 218 for details
- Insulators are high temperature thermoplastic

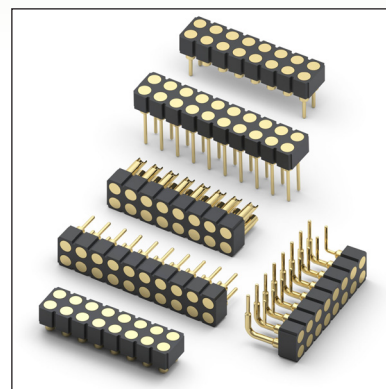

ORDERING INFORMATION

FIG. 1	Series 419...041	Surface Mount
	419-10-2	-30-041000
	Specify number of pins	04-64
FIG. 2	Series 419...042	Surface Mount w/ Alignments Pins
	419-10-2	-30-042000
	Specify number of pins	06-64
FIG. 3	Series 419...001	Standard Solder Tails
	419-10-2	-00-001000
	Specify number of pins	04-64
FIG. 4	Series 419...002	Long Solder Tails
	419-10-2	-00-002000
	Specify number of pins	04-64
FIG. 5	Series 419...005	Elevated with Solder Tails
	419-10-2	-00-005000
	Specify number of pins	04-64
FIG. 6	Series 430...240	Solder Cups
	430-10-2	-00-240000
	Specify number of pins	04-64
FIG. 7	Series 499...008	Right Angle Solder Tails
	499-10-2	-10-008000
	Specify number of pins	04-64
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating		
10 ◆		
0,25µm Au		

