




*National  
Semiconductor*

## **LMK03000C**

**Precision Clock Conditioner with Integrated VCO  
Evaluation Board Operating Instructions**

**4-16-2009**

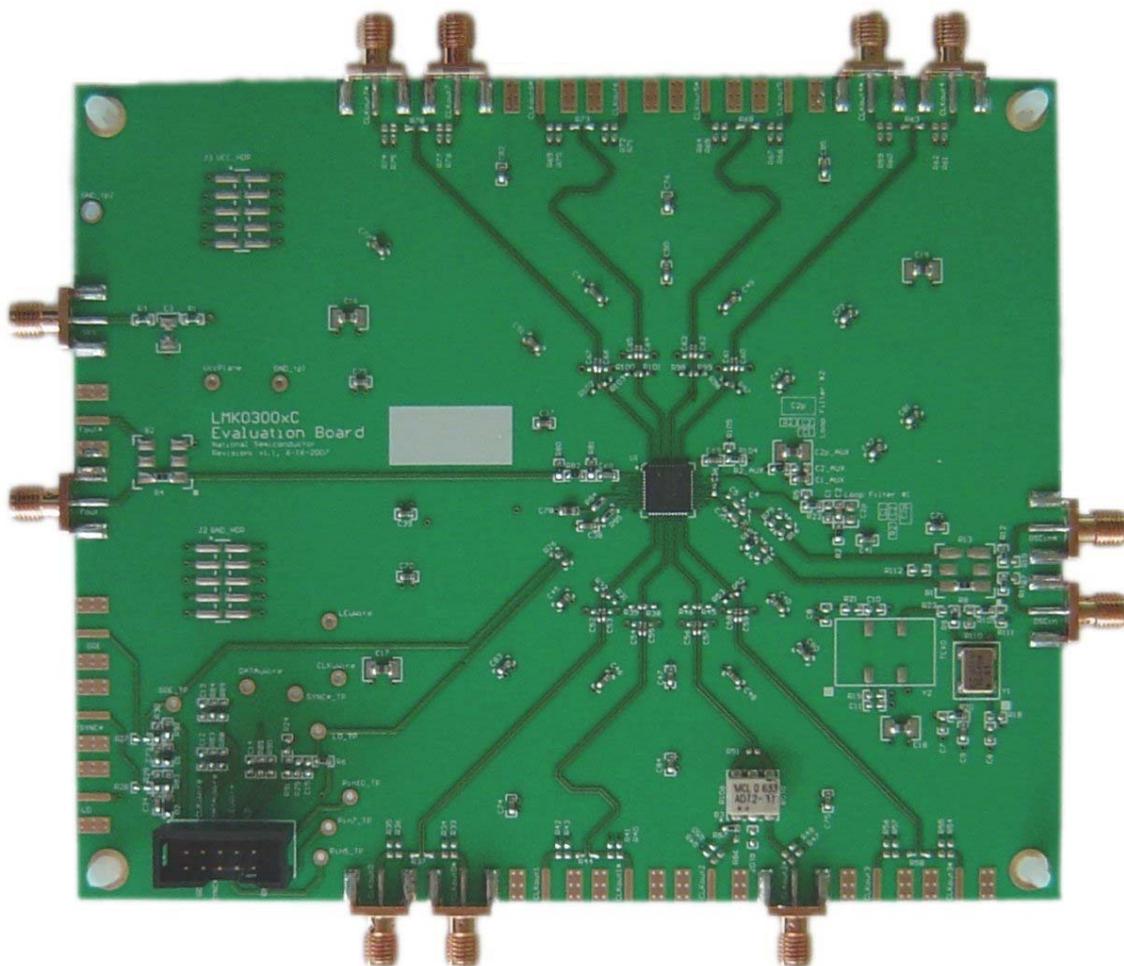

**National Semiconductor Corporation  
Interface**

**2900 Semiconductor Dr.  
MS A2-600  
Santa Clara, CA, 95052-8090**


## TABLE OF CONTENTS

GENERAL DESCRIPTION .....	3
LOOP FILTER #1 .....	3
READ FIRST, BASIC OPERATION .....	4
BOARD INFORMATION.....	8
OSCin .....	8
Fout.....	8
Loop Filter .....	8
Features of the board.....	9
Other Important Notes .....	9
Evaluation Board Revision v1.0 Errata.....	9
RECOMMENDED EQUIPMENT.....	10
PHASE NOISE .....	11
DELAYS.....	13
CODELOADER SETTINGS.....	14
APPENDIX A: VCO PERFORMANCE.....	18
APPENDIX B: IMPACT OF REFERENCE ON PHASE NOISE .....	20
APPENDIX C: SCHEMATICS .....	21
APPENDIX D: BILL OF MATERIALS.....	24
APPENDIX E: BUILD DIAGRAM .....	26

## General Description

The LMK03000C Evaluation Board simplifies evaluation of the LMK03000C Precision Clock Conditioner with Integrated VCO. The package consists of an evaluation board and CodeLoader software. The *CodeLoader* software will run on a Windows 2000 or Windows XP PC. The purpose of the *CodeLoader* software is to program the internal registers of the LMK03000C device through a MICROWIRE™ interface.

Loop Filter #1			
Phase Margin	70.0°	K $\phi$	3200 uA
Loop Bandwidth	55.3 kHz	f <sub>PD</sub>	9.72 MHz
Crystal Frequency	19.44 MHz	Output Frequency	1185 to 1296 MHz
Supply Voltage	3.3 Volts	VCO Gain	8 MHz/Volt

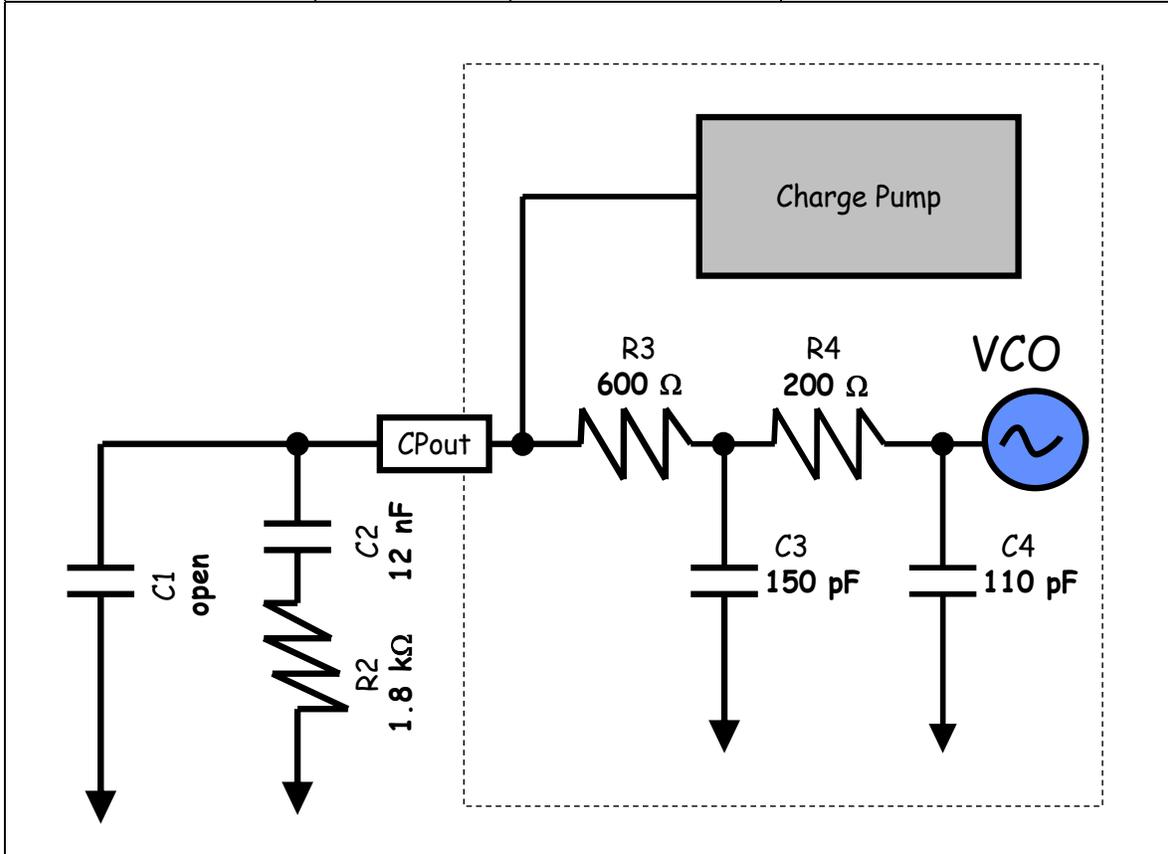

Loop filter #1 is selected by placing a 0 ohm resistor on pad R22.


This loop filter has been designed for optimal RMS jitter using a low noise reference.

## Read first, Basic Operation

Read the document, “Installing CodeLoader 4 & USB Driver” for instructions to prepare the computer for usage with the evaluation board before continuing with the hardware setup.

For basic operation...

1. Connect a low noise **3.3 V** power supply to the **Vcc** connector located at the top left of the board
2. Connect the CodeLoader cable to the **uWire** header located in the lower left.

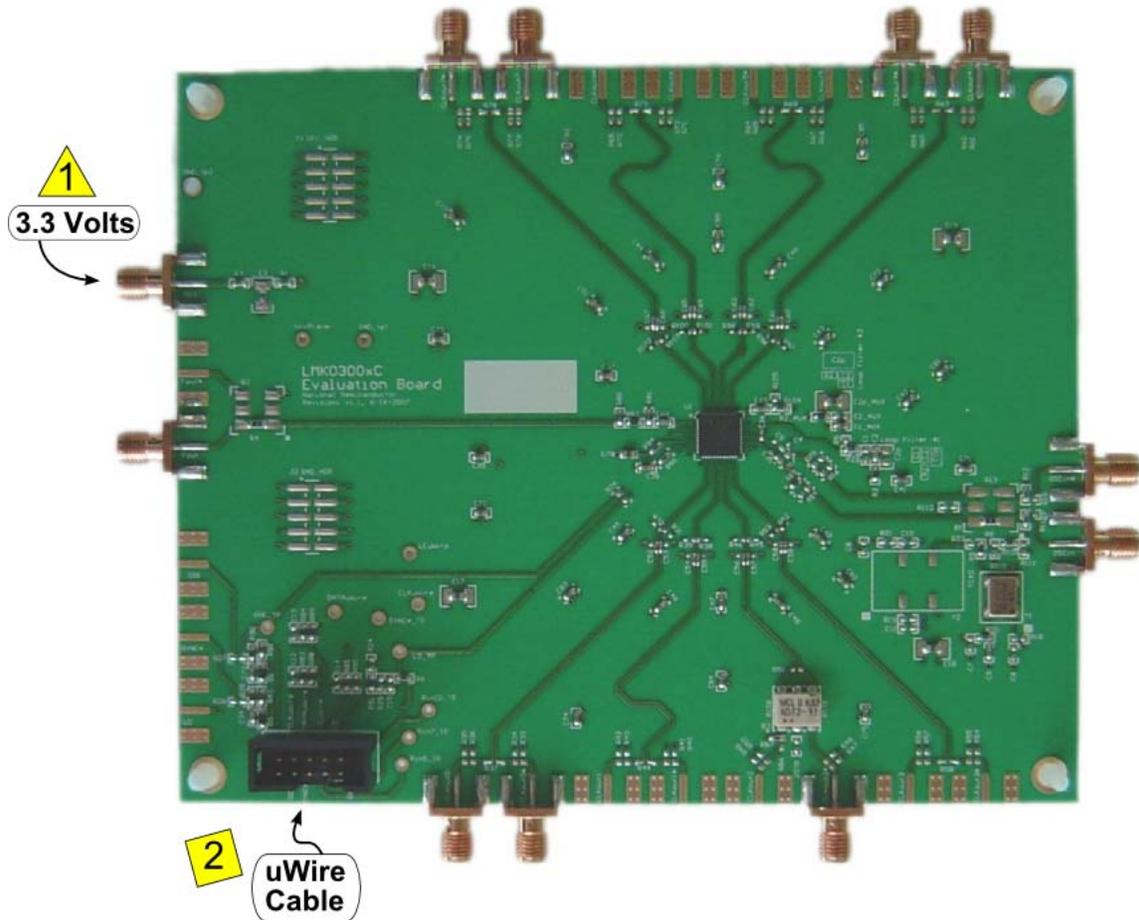


## Read first, Basic Operation (Continued)

### 3. Connect...

- PC directly to the evaluation board with the LPT to uWire cable, plugging the cable into an LPT port on the computer and then the 10 pin ribbon connector to the evaluation board. This setup is shown below. **The cable can be removed after programming to minimize noise and EMI.**


or

- Available separately, the USB <--> uWire board to the PC with the USB cable and the USB <--> uWire board to the evaluation board with the 10 pin ribbon cable.

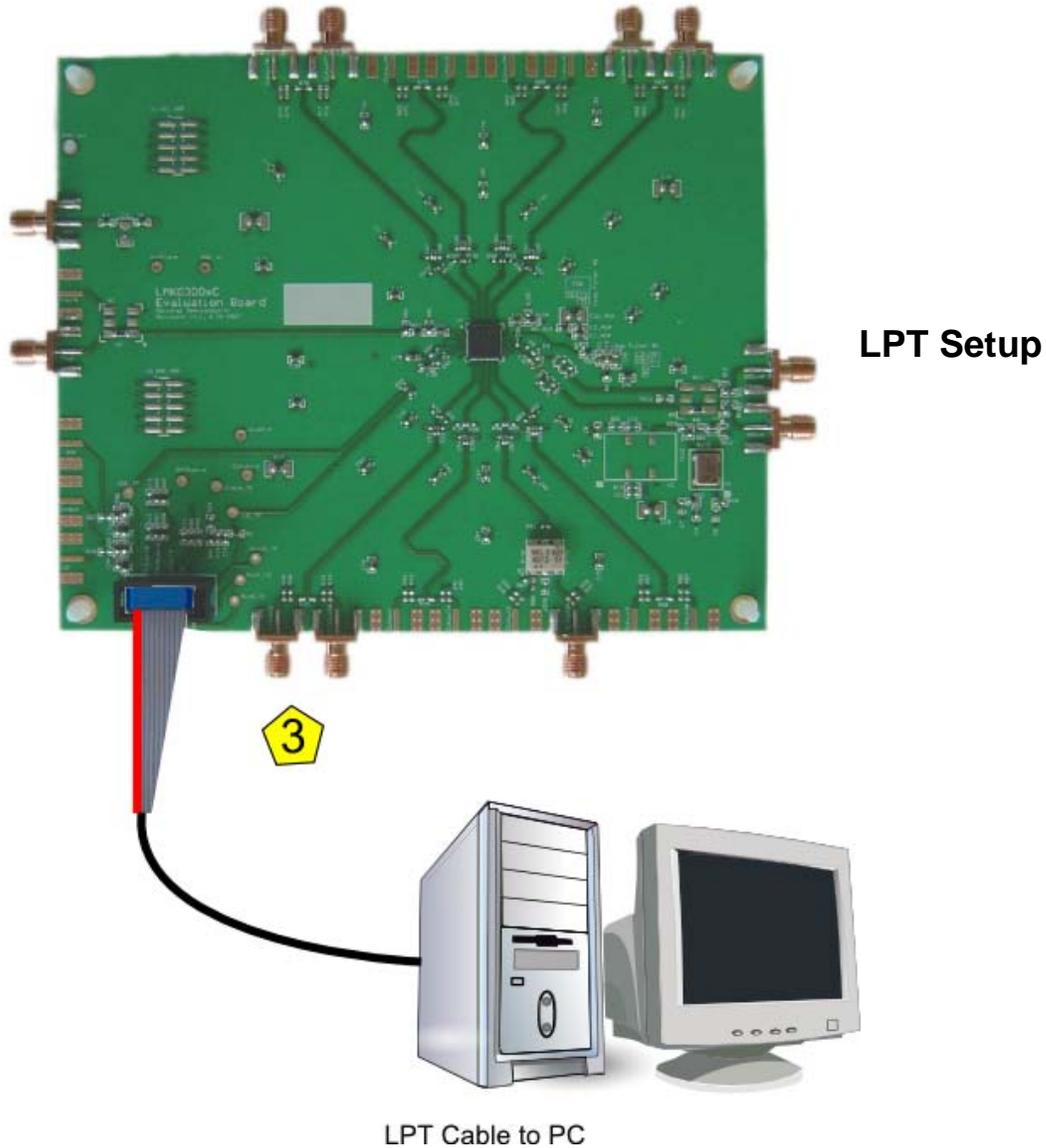


## Read first, Basic Operation (Continued)

4. Start CodeLoader 4.

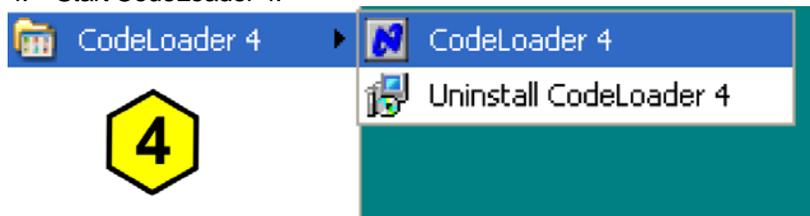



5. Select the USB or LPT Communication Mode on the Port Setup tab as appropriate.

6. Select the default mode by clicking "Mode" → "19.44 MHz OSCin"

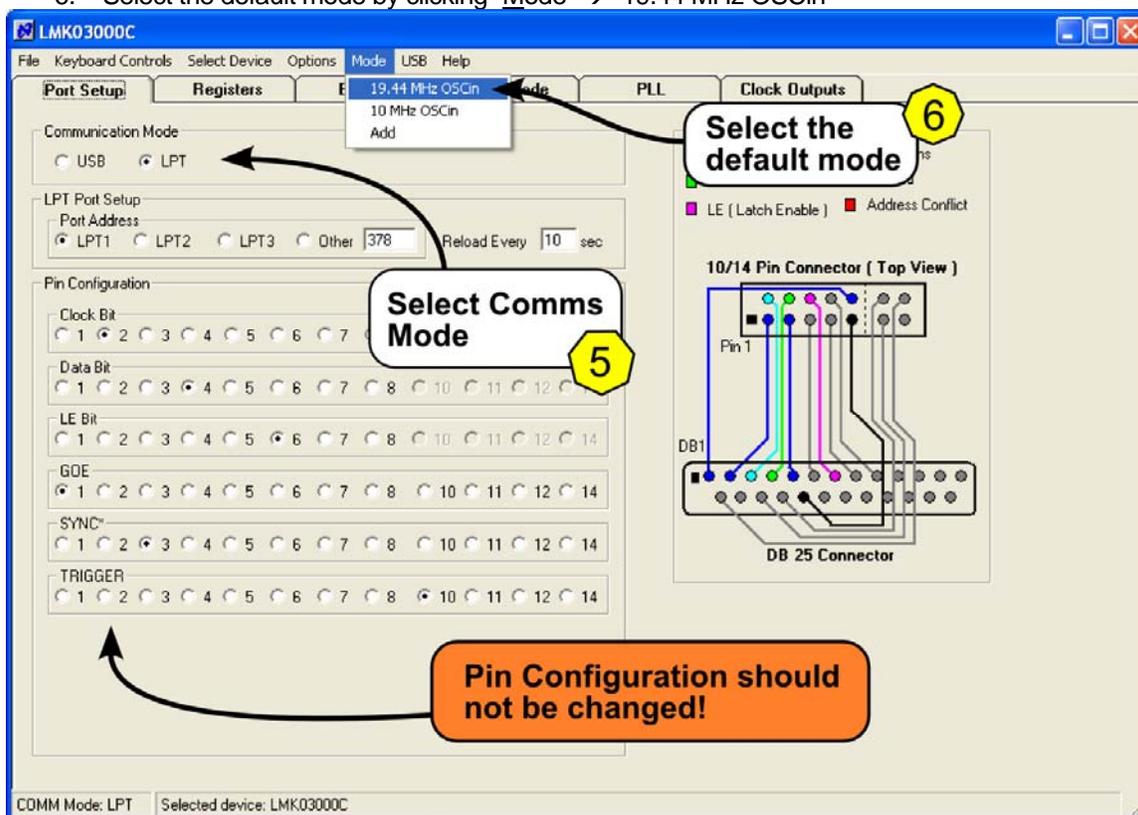

## Read first, Basic Operation (Continued)

7. Enable output to be measured, any of CLKout(0-7) or EN\_Fout from either Clock Outputs or Bits/Pins tab.

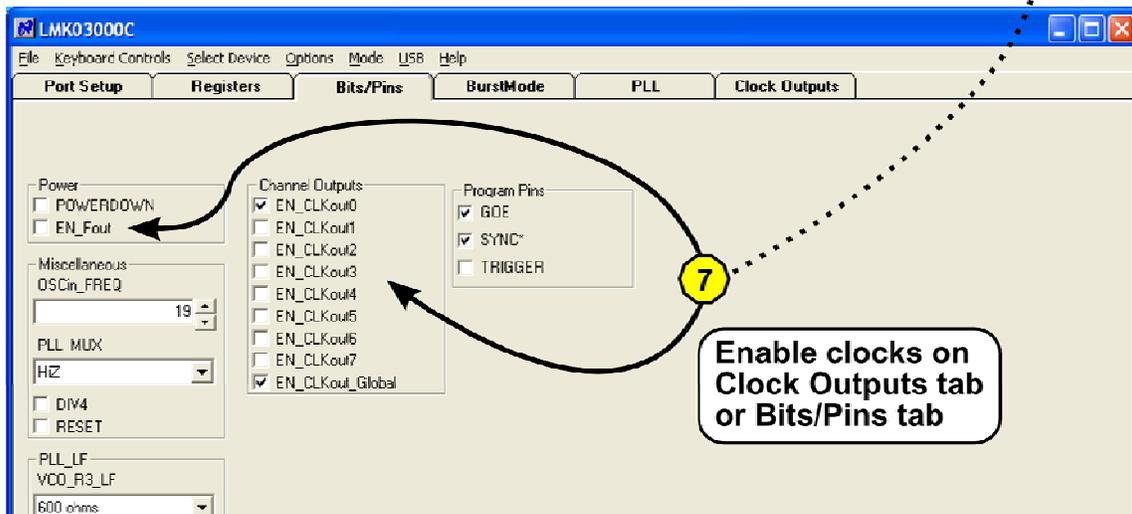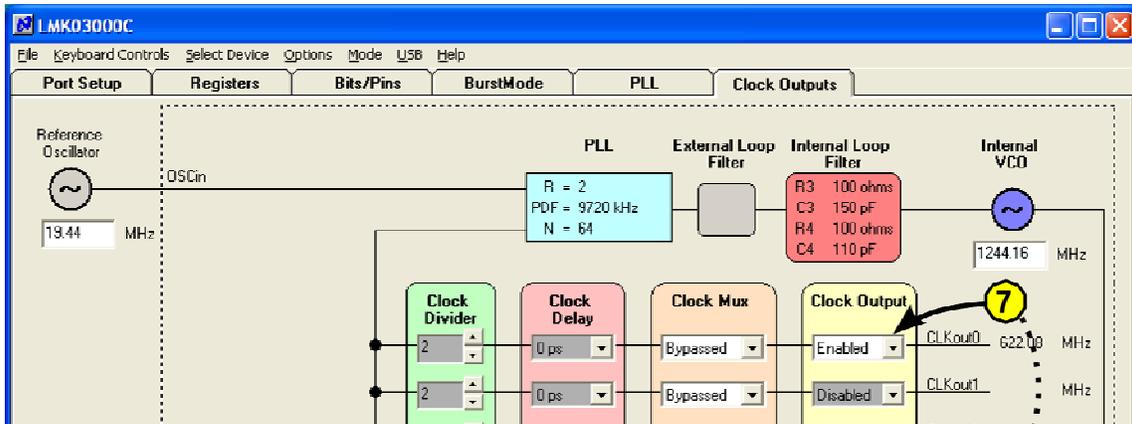

8. Program the part by clicking "Keyboard Controls" → "Load Device" or by pressing Ctrl+L.



9. Make measurements... After programming, the uWire cable can be unplugged from the evaluation board to minimize noise and EMI.

## Board Information

### OSCI<sub>n</sub>

By default the board is configured to use the on-board crystal oscillator. It is also possible to use the board with a single ended or differential reference source at the OSC<sub>n</sub> port. Below are several possible configurations for driving OSC<sub>n</sub>.

<b>OSCI<sub>n</sub> using on board crystal oscillator [default]</b>	
0 ohm	R8, R11, R20 [power to crystal oscillator], R109
39 ohm	R9 [can also be 0 ohm – depends on oscillator output power, 39 ohms to be a voltage divider]
51 ohm	R15
0.1 uF	C35, C36 (C5 is a 0.1 uF 0402 cap which may be moved to C36)
Open	C4, C5 R7, R10, R12, R13, R14, R16, R17, R79, R112

<b>Differential OSC<sub>n</sub> setup</b>	
0 ohm	R7, R8, R10, R13
100 ohm	R44
0.1 uF	C5, C35 (C36 is a 0.1 uF 0402 cap which may be moved to C5)
Open	C4, C36 R11, R12, R14, R15, R16, R79 R20 [remove power from crystal oscillator for noise reasons]

<b>Single ended OSC<sub>n</sub> setup</b>	
0 ohm	R7, R8
51 ohm	R15
0.1 uF	C35, C36 (C5 is a 0.1 uF 0402 cap which may be moved to C36)
Open	C4, C5 R10, R11, R12, R13, R14, R16, R17, R79 R20 [remove power from crystal oscillator for noise reasons]

### Fout

Fout allows direct access to the internal VCO before the clock distribution section. The EN\_Fout bit must be selected to enable Fout. A 3 dB pad is placed on R80, R81, and R82.

### Loop Filter

R22 and R5 form a “resistor switch” which allows either one of two different loop filters to be selected.

Loop Filter	Resistor Switch	Loop Filter Components	Default Loop Bandwidth
Loop Filter #1 [default]	R22 Shorted	C1, C2, C2p, R2	59.1 kHz
Loop Filter #2	R5 Shorted	C1_AUX, C2_AUX, C2p_AUX, R2_AUX	77 Hz

## Features of the board

- Either one of two loop filters can be selected by shorting either R22 or R5. More info about each loop filter can be found in the General Description and Appendix A.
- Test points for each of the uWire lines are scattered in the lower left corner of the board and include: GOE\_TP, DATAuWire, CLKuWire, LEuWire, SYNC\_TP, and LD\_TP.
- **Ground** is located on the unstuffed 10 pin header on the left side of the board.
- **Ground** is located on the GND\_tp2 in the upper left corner of the board and GND\_tp1 located to the right of the Vcc SMA connector.
- **Ground** is located on the bottom side of the board on each pad of the unstuffed 10 pin header GND\_J2.
- **Vcc** is located on the unstuffed 10 pin header on the upper left side of the board.
- **Vcc** is located on VccPlane test point located to the right of the Vcc SMA.
- **Vcc** is located on the bottom side of the board on each pad of the unstuffed 10 pin header VCC\_J2

## Other Important Notes

- When changing the OSCin frequency, the OSCin frequency register needs to be changed to match.
- Toggle the SYNC\* pin to synchronize the clock outputs when in divided mode.
- For both loop filters, a helper silkscreen is offset from the loop filters to help identify the components according to National Semiconductor's traditional reference designators associated with loop filters.

## Evaluation Board Revision v1.0 Errata

- SYNC\* is labeled on the PCB as SYNC, however the logic of SYNC\* is still active low!

## Recommended Equipment

### Power Supply

The Power Supply should be a low noise power supply. An Agilent 6623A Triple power supply with LC filters on the output to reduce noise was used in creating these evaluation board instructions.

### Phase Noise / Spectrum Analyzer

For measuring phase noise an Agilent E5052A is recommended. An Agilent E4445A PSA Spectrum Analyzer with the Phase Noise option is also usable although the architecture of the E5052A is superior for phase noise measurements. At frequencies less than 100 MHz the local oscillator noise of the PSA is too high and measurements will be of the local oscillator, not the device under test.

### Oscilloscope


For measuring delay an Agilent Infiniium DSO81204A was used.

### Reference Oscillator

The on board crystal oscillator will provide a low noise reference signal to the device at offsets greater than 1 kHz.

Note: The default loop filter has a loop bandwidth of ~60 kHz. Inside the loop bandwidth of a PLL the noise is greatly affected by any noise on the reference oscillator (OSCin). Therefore any noise on the oscillator less than 60 kHz will be passed through and seen on the outputs. For this reason the main output of a Signal Generator is not recommended for driving OSCin in this setup.

### Phase Noise

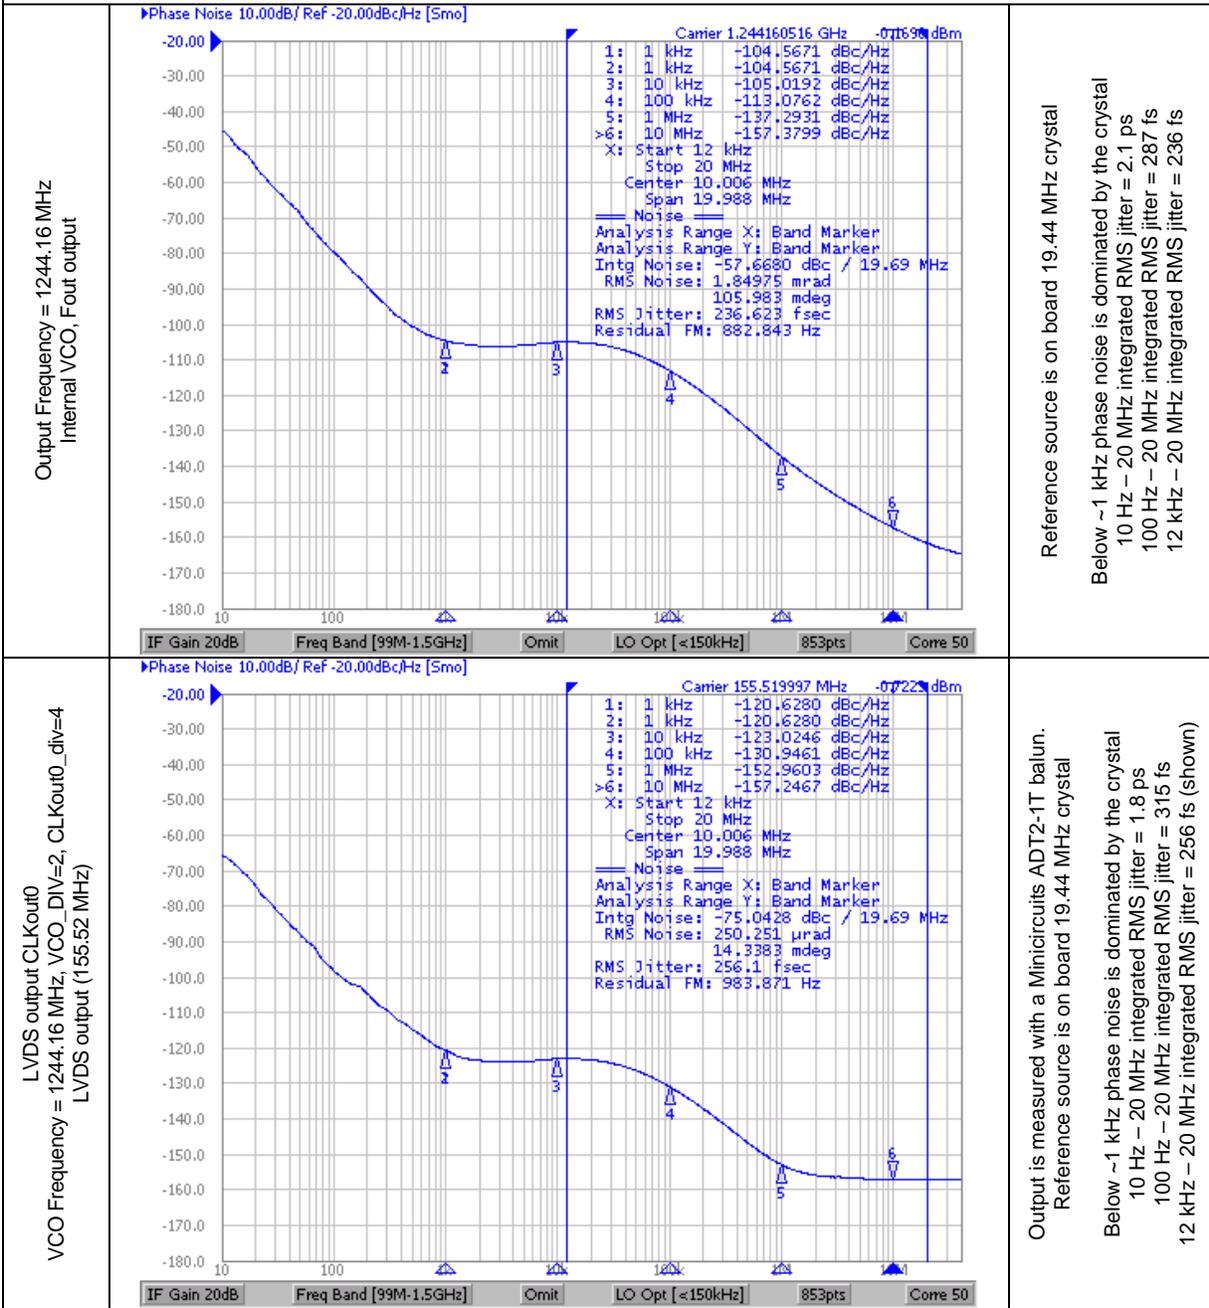


Reference source is on board 19.44 MHz crystal

Below ~1 kHz phase noise is dominated by the crystal  
10 Hz – 20 MHz integrated RMS jitter = 2.1 ps  
100 Hz – 20 MHz integrated RMS jitter = 287 fs  
12 kHz – 20 MHz integrated RMS jitter = 236 fs

Output is measured with a Minicircuits ADT2-1T balun.  
Reference source is on board 19.44 MHz crystal

Below ~1 kHz phase noise is dominated by the crystal  
10 Hz – 20 MHz integrated RMS jitter = 1.8 ps  
100 Hz – 20 MHz integrated RMS jitter = 315 fs  
12 kHz – 20 MHz integrated RMS jitter = 256 fs (shown)

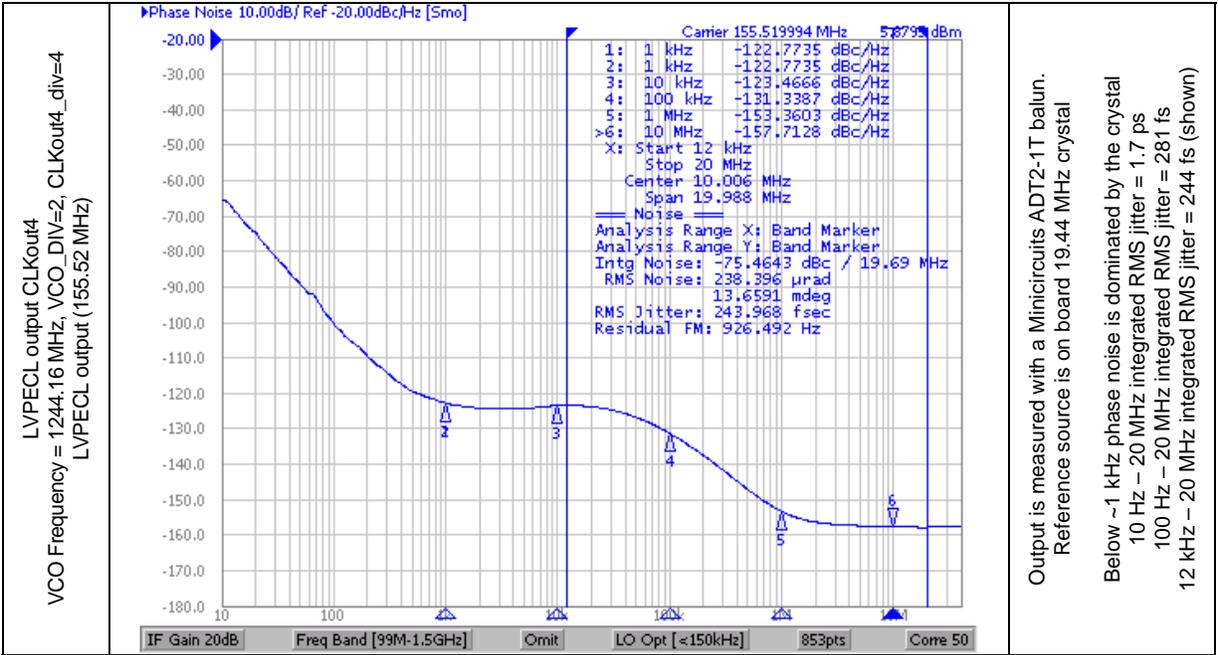


## Delays

These delay measurements illustrate how skew errors due to different length traces may be tuned out. The delay may be adjusted in steps of 150 ps.



Delays 150, 300, 450, 600, 750


### Delays from 0 to 2250 ps on CLKout1 referenced to CLK out0

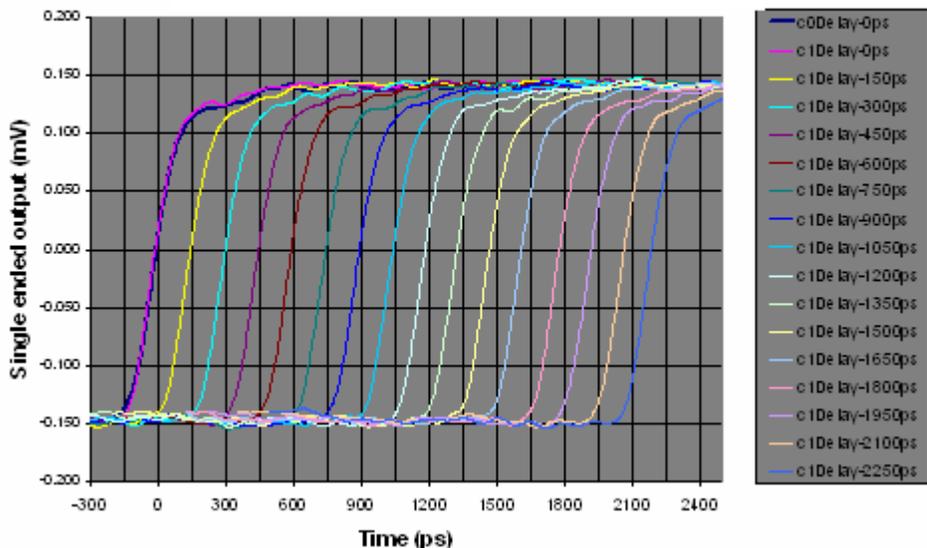

CLKout0\_DLY = 0 ps

CLKout1\_DLY = all delays programmed: 0, 150, 300, 450, 600, 750, 900, 1050, 1200, 1350, 1500, 1650, 1800, 1950, 2100, and 2250 ps


## CodeLoader Settings

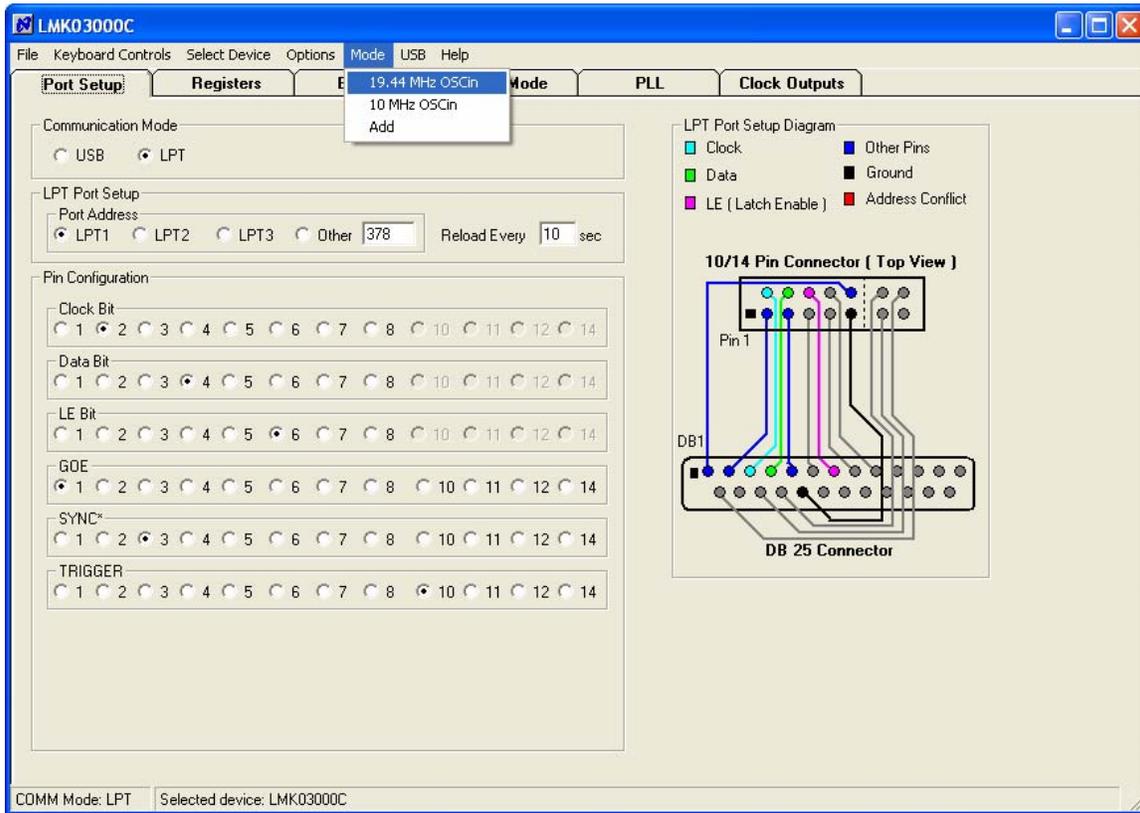

The Port Setup tab tells CodeLoader what signals are assigned to which pins. If this is wrong, the part will not program.

Part setup can be restored to the default state by clicking Mode → “19.44 MHz OSCin”. The default reference oscillator used for these instructions is 19.44 MHz and the restored mode expects a 19.44 MHz OSCin signal. **For the loaded mode to take affect the device must be loaded by pressing Ctrl+L.**

The Bits/Pins tab shows some of the internal registers which are not accessible from any of the other visual tabs like “PLL” and “Clock Outputs.” *Right click on any of the bits for description.*

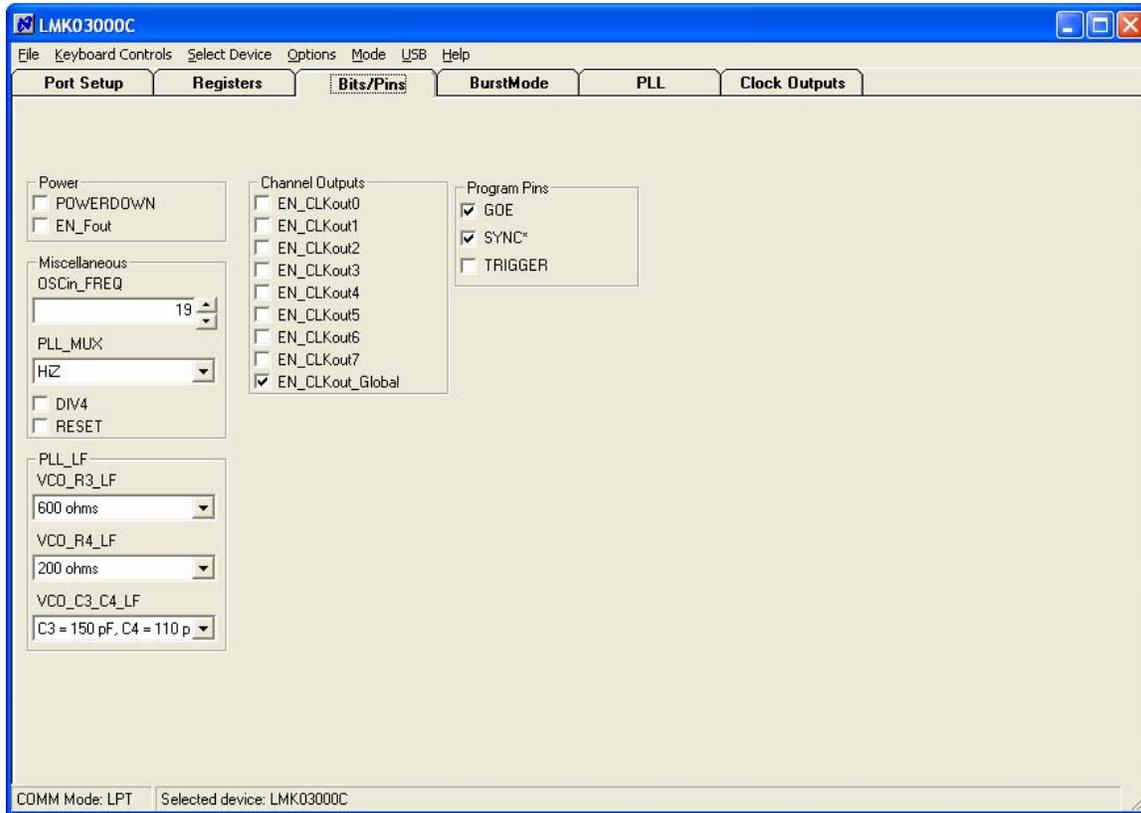


Program Bits	
POWERDOWN	Powers the part down.
EN_Fout	Turns on the Fout pin for measuring the internal VCO.
OSCin_FREQ	Must be set to the OSCin frequency in MHz.
PLL_MUX	Programmable to many different values to support Lock Detect or aid troubleshooting.
DIV4	Shall be checked for OSCin frequencies greater than 20 MHz.
RESET	The registers can be defaulted by checking and unchecking RESET. Software bits will not reflect this.
VCO_R3_LF VCO_R4_LF VCO_C3_C4_LF	Internal loop filter values, also accessible from Clock Outputs tab.
EN_CLKout0..7	Enable CLKout bits from CLKout0 to CLKout7. Also accessible from Clock Outputs tab.
EN_CLKout_Global	Enable all clock outs. If unselected then the EN_CLKouts are overridden and the outputs are all disabled.

Program Pins	
GOE	Set Global Output Enable to high or low logic level.
SYNC*	Set SYNC* pin to high or low logic level.
TRIGGER	Set auxiliary trigger pin to high or low logic level.



The PLL tab shows a conventional PLL diagram along with the VCO Divider. It is important to realize that the total effective N value is PLL N Counter \* VCO Divider. This means that the **“channel spacing” is the Phase Detector Frequency \* VCO Divider**. Depending on the situation, this may require the R Counter multiplied up by the value of the VCO Divider to achieve desired VCO output frequencies.

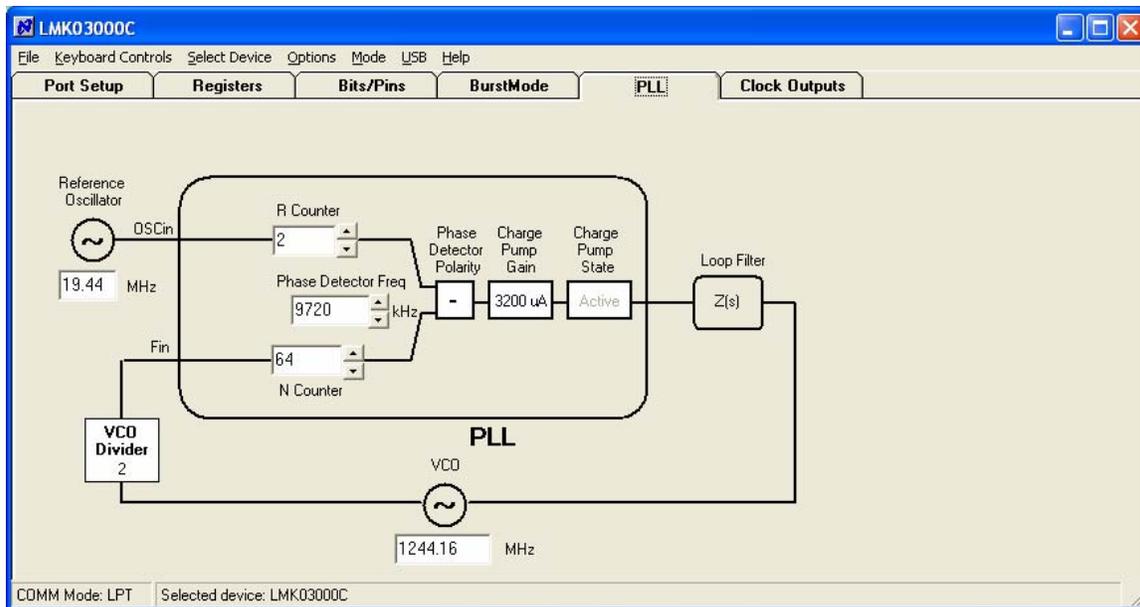


**Example:** If the desired VCO output frequency was 1244.16 MHz, R would need to be increased to 2 before 1253.88 MHz could be programmed because of the VCO Divider of 2 would only allow programming of 1244.16, 1263.6, 1283.04, etc. with a 9.72 MHz phase detector frequency – because changing the N counter from 64 to 65 changes to total N by two, 128 to 130!

## Appendix A: VCO Performance

The internal VCO performance is measured by using a narrow bandwidth loop filter. By default the narrow loop bandwidth filter is stuffed as Loop Filter #2 in positions C1\_AUX, C2\_AUX, C2p\_AUX, and R2\_AUX and has a loop bandwidth of 77 Hz.

See the Loop Filter section in Board Options for more detail about switching between the two different loop filters.


Loop Filter			
Phase Margin	58.7°	K $\phi$	100 uA
Loop Bandwidth	77 Hz	f <sub>PD</sub>	1.023 MHz
Crystal Frequency	19.44 MHz	Output Frequency	1185 to 1296 MHz
Supply Voltage	3.3 Volts	VCO Gain	10 MHz/Volt

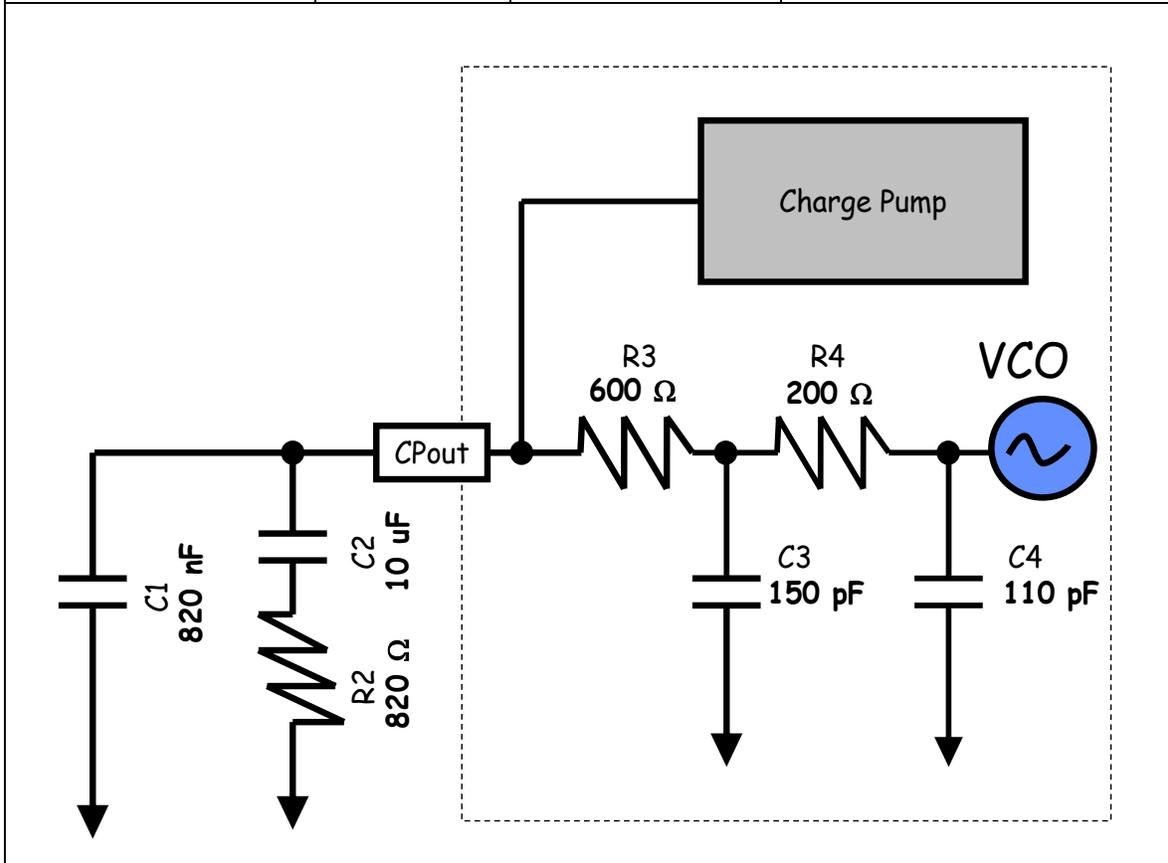

This loop filter is located on the top side of the PCB and is selected by placing a 0 ohm resistor on pad R5.

This loop filter has been designed with a very small loop bandwidth to minimize the PLL from interacting with the noise of the VCO to permit a VCO phase noise measurement.

## VCO Phase Noise - Narrow Loop Bandwidth

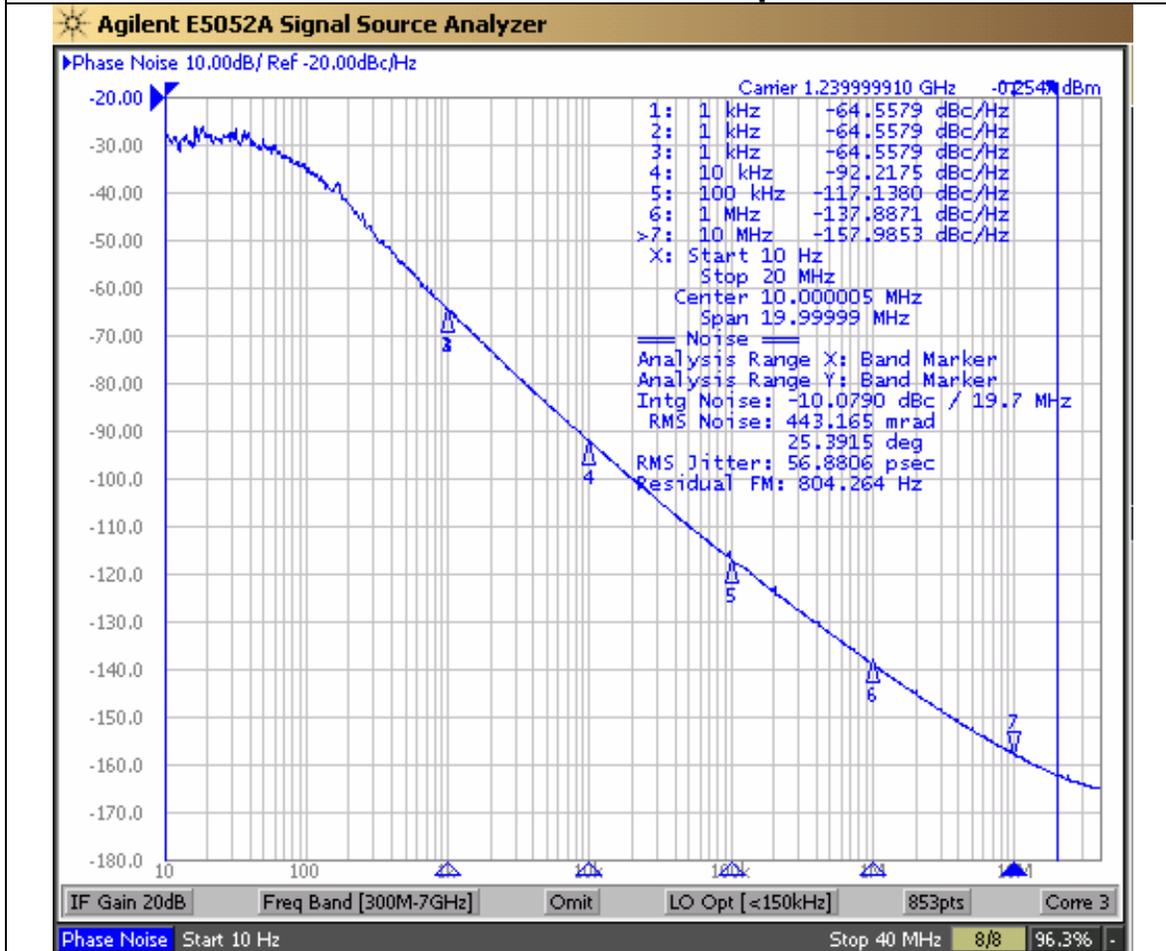

This plot shows the noise of the VCO at 1240 MHz using a 1 MHz Phase Detector Frequency. An external oscillator was used for this plot, since the VCO noise dominates, reference oscillator noise is not critical.

The loop bandwidth has been minimized so that the VCO is the dominant noise contributor.

**10 Hz – 20 MHz integrated RMS jitter = 56.9 ps (shown)**

100 Hz – 20 MHz integrated RMS jitter = 25.0 ps


12 kHz – 20 MHz integrated RMS jitter = 0.304 ps (datasheet)

## Appendix B: Impact of Reference on Phase Noise

Inside the loop bandwidth of a PLL the phase noise is set by the quality of the reference oscillator used. For this reason it is important to select a reference oscillator suitable for the application.

### Test Setup

Using the same loop filter as described in the General Description and by driving the OSCin frequency with an ultra low jitter 100 MHz Wetzel Crystal (501-04517D) and setting R = 10 to achieve a phase detector frequency of 10 MHz. A very low integrated RMS jitter of 247 fs is measured vs. the 2.1 ps measured in the Phase Noise section with 19.44 MHz crystal in the bandwidth of 10 Hz to 20 MHz.

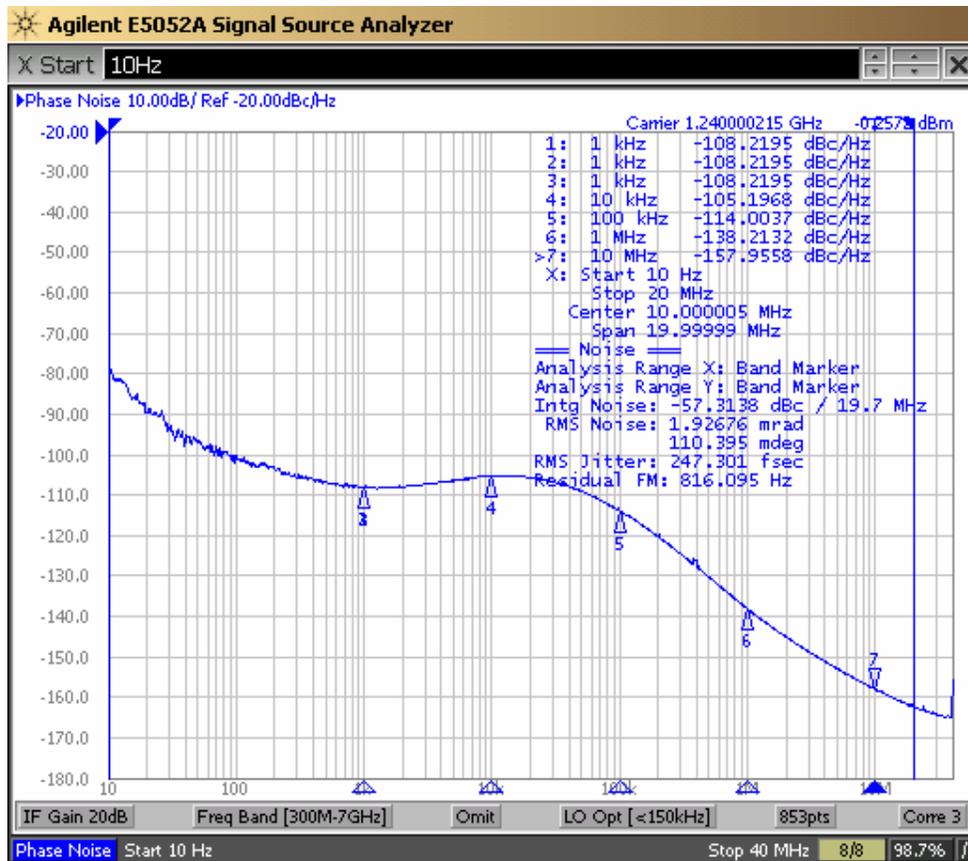

**10 Hz – 20 MHz integrated RMS jitter = 247 fs (shown)**


100 Hz – 20 MHz integrated RMS jitter = 243 fs


12 kHz – 20 MHz integrated RMS jitter = 222 fs

### Conclusion

This diagram illustrates how the phase noise inside the loop bandwidth is set by the quality of the reference oscillator used. Phase noise outside the loop bandwidth is set by the VCO noise level.

## Appendix C: Schematics

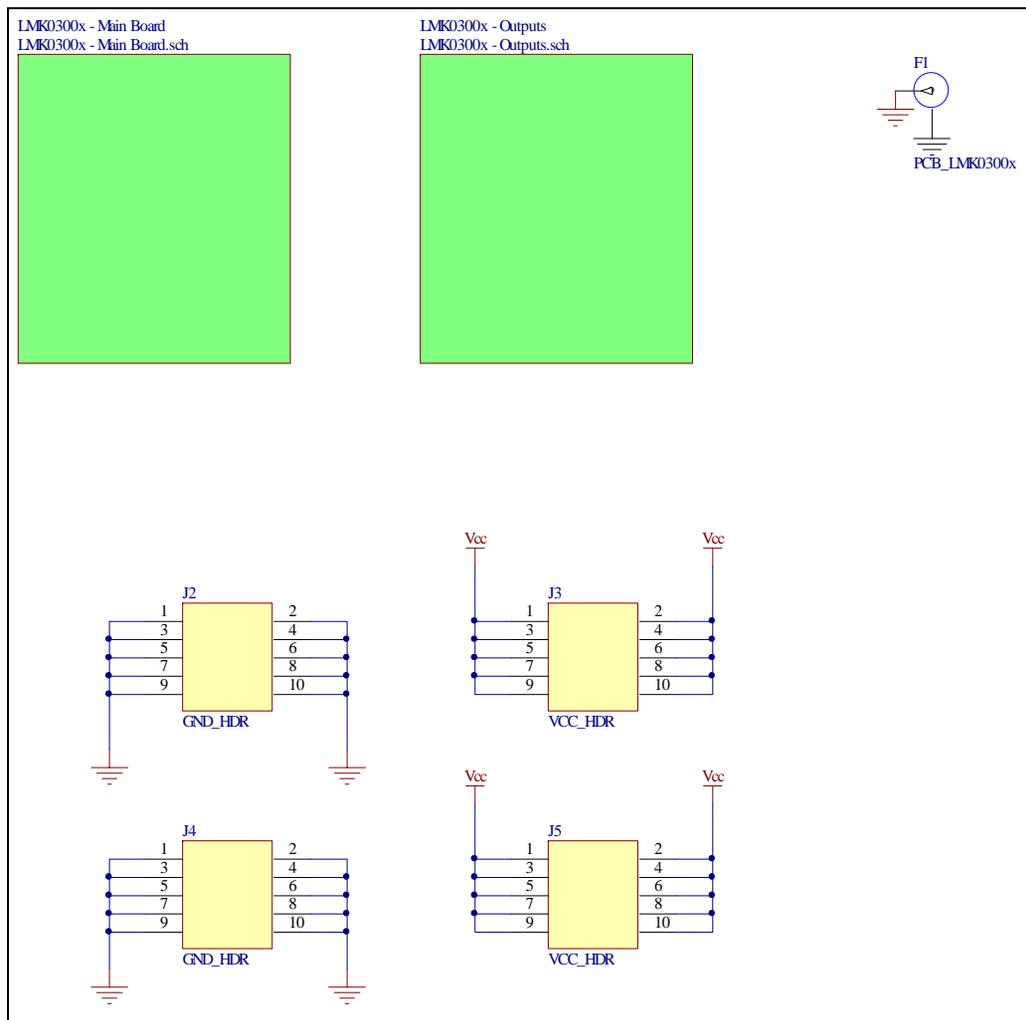

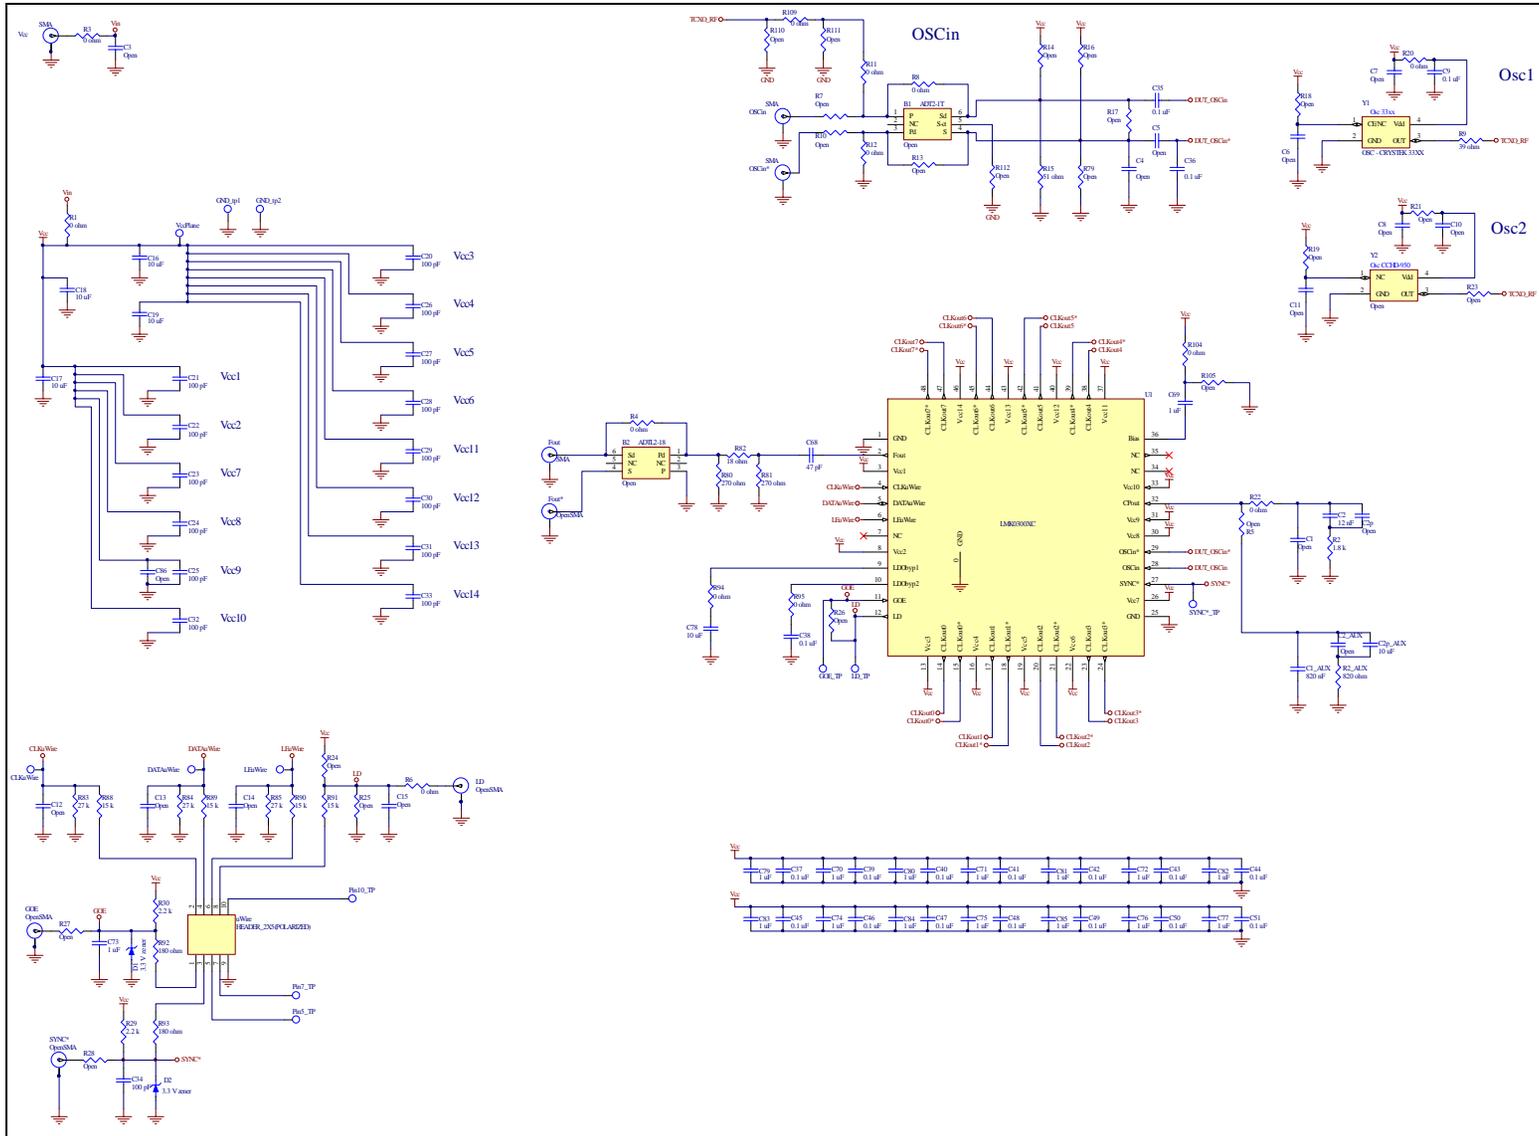




### Appendix D: Bill of Materials

Part	Manufacturer	Part Number	Qty	Identifier
<b>Capacitors</b>				
47 pF	Kemet	C0603C470J5GAC	1	C68
100 pF	Kemet	C0402C101J5GAC	14	C20, C21, C22, C23, C24, C25, C26, C27, C28, C29, C30, C31, C32, C33
100 pF	Kemet	C0603C101J5GAC	1	C34
12 nF	Kemet	C0603C123K1RACTU	1	C2
0.1 uF	Kemet	C0603C104J3RAC	16	C9, C37, C38, C39, C40, C41, C42, C43, C44, C45, C46, C47, C48, C49, C50, C51
0.1 uF	Kemet	C0402C104J4RAC	18	C35, C36, C52, C53, C54, C55, C56, C57, C58, C59, C60, C61, C62, C63, C64, C65, C66, C67
820 nF	Kemet	C0603C824K8PAC	1	C1_AUX
1 uF	Kemet	C0603C105K8VAC	16	C69, C70, C71, C72, C73, C74, C75, C76, C77, C79, C80, C81, C82, C83, C84, C85
10 uF	Kemet	C0805C106K9PAC	5	C2p_AUX, C16, C17, C18, C19
10 uF	Kemet	C0805C106K9PAC	1	C78
<b>Resistors</b>				
0 ohm	Vishay	CRCW0603000ZRT1	10	R1, R3, R6, R11, R12, R20, R22, R95, R104, R109
0 ohm	Yageo	RC0805JR-070RL	2	R4, R8
0 ohm	Vishay	CRCW0603000ZRT1	2	R87, R94
18 ohm	Vishay	CRCW0603180JRT1	1	R82
39 ohm	Vishay	CRCW0603390JRT1	1	R9
51 ohm	Vishay/Dale	CRCW060351R0JNEA	1	R15
120 ohm	Vishay	CRCW0402120RJNED	10	R52, R53, R96, R97, R98, R99, R100, R101, R102, R103
180 ohm	Vishay	CRCW0603181JRT1	2	R92, R93
270 ohm	Vishay	CRCW0603271JRT1	2	R80, R81
820 ohm	Vishay	CRCW0603821JRT1	1	R2_AUX
1.8 k	Vishay/Dale	CRCW06031K80JNEA	1	R2
2.2 k	Vishay/Dale	CRCW06032K20JNEA	2	R29, R30

15 k	Vishay	CRCW0603153JRT1	4	R88, R89, R90, R91
27 k	Vishay	CRCW0603273JRT1	3	R83, R84, R85
<b>Other</b>				
LMK0300xC	National Semiconductor	LMK03000CI	1	U1
OSC - CRYSTEK 33xx	Crystek	C3391-19.440	1	Y1
ADT2-1T	Minicircuits	ADT2-1T	1	B3
SMA	Johnson Components	142-0701-851	11	CLKout0, CLKout0*, CLKout2*, CLKout4, CLKout4*, CLKout7, CLKout7*, Fout, OSCin, OSCin*, Vcc
3.3 V zener	Comchip	CZRU52C3V3	2	D1, D2
PCB_LMK0300x	Printed Circuits Corp	PCB_LMK0300x rev 1.1, 6-16-2007	1	F1
HEADER_2X5(POLARIZED)	FCI Electronics	52601-S10-8	1	uWire
SPCS-8	SPC Technology	SPCS-8	4	Standoffs in the four corners (insert from bottom)
<b>Open</b>				
Open	-	Open	2	B1, B2
Open	-	603	32	C1, C2_AUX, C6, C7, C8, C10, C11, C12, C13, C14, C15, R5, R7, R10, R14, R16, R17, R18, R19, R21, R23, R24, R25, R26, R27, R28, R79, R105, R107, R110, R111, R112
Open	-	805	1	C2p
Open	-	Open	1	C3
Open	-	402	16	C4, C5, R31, R32, R37, R38, R39, R44, R45, R46, R51, R58, R63, R68, R73, R78
Open	-	603	34	C86, R33, R34, R35, R36, R40, R41, R42, R43, R47, R48, R49, R50, R54, R55, R56, R57, R59, R60, R61, R62, R64, R65, R66, R67, R69, R70, R71, R72, R74, R75, R76, R77, R86
OpenSMA	-	Open	13	CLKout1, CLKout1*, CLKout2, CLKout3, CLKout3*, CLKout5, CLKout5*, CLKout6, CLKout6*, Fout*, GOE, LD, SYNC*
Open	-	HEADER_2X5	2	J2, J4
Open	-	HEADER_2X5	2	J3, J5
Open	-	805	3	R13, R106, R108
Open	-	Open	1	Y2



### Bottom Build Diagram

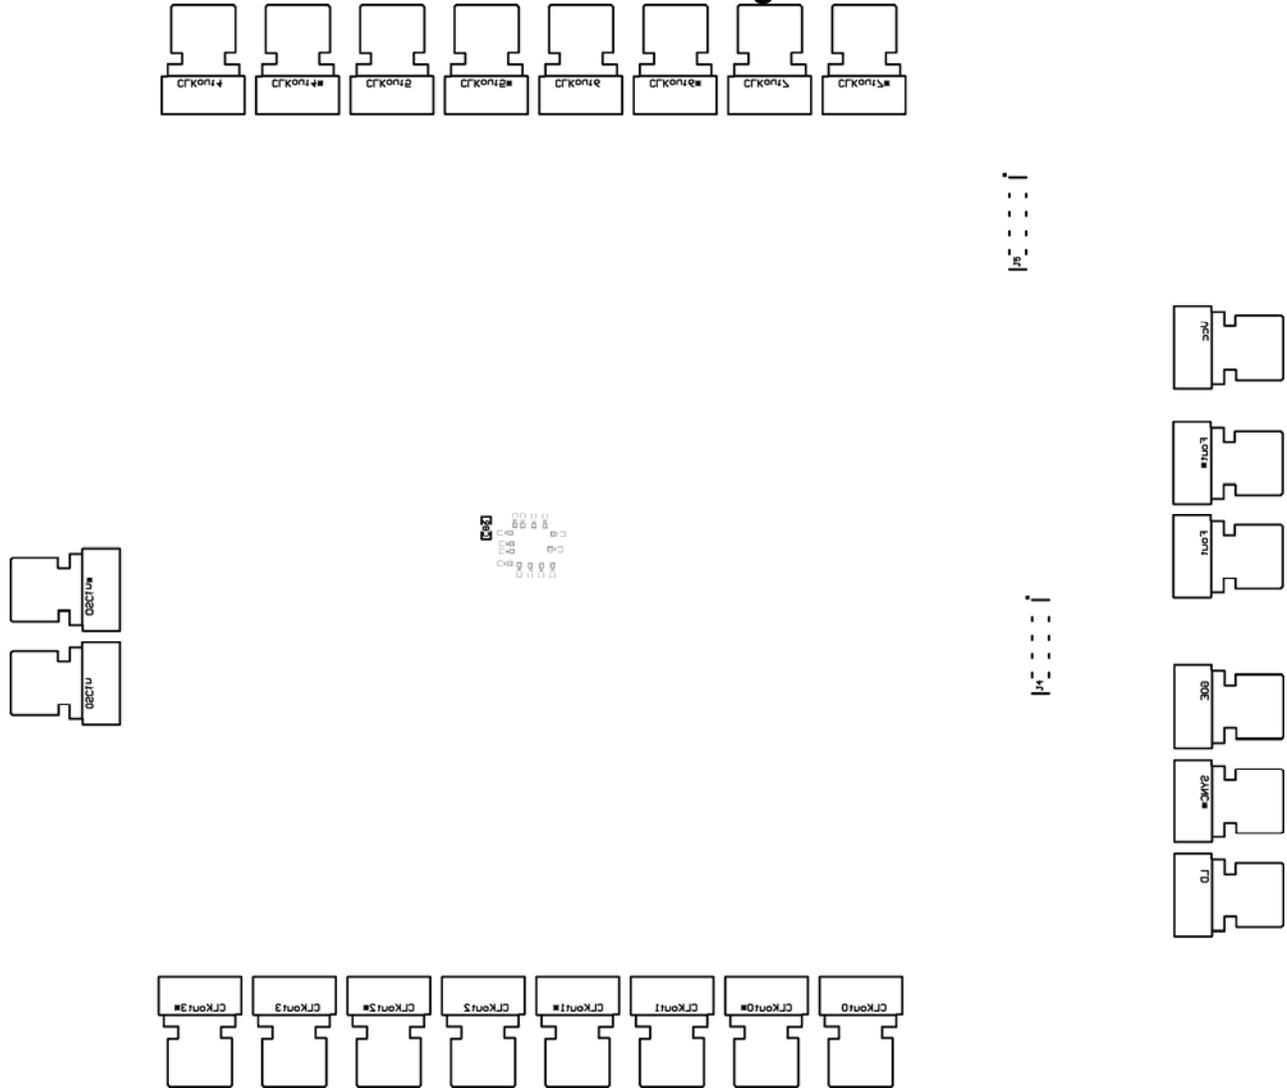

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated