

## MODEL CT - CURRENT TRANSFORMER




### SPECIFICATIONS

1. **Operating Frequency:** 50 to 400 Hz.
2. **Insulation Class:** 0.6 KV BIL 10 KV full wave.
3. **Terminals:** Brass studs No. 8-32 UNC with flat washer and hex nuts.
4. **Window Diameter:** 1.13" (28.7 mm).
5. **Weight:** 8.0 oz (226.0 g).

	UL FILE #	CSA FILE #
Instrument Transformers, Inc.	E93779	89403
Tyco Electronics	E348387	253481
Crompton Instruments a Tyco Electronics Company	E257877	237637

*Note: The listed current ratio of the current transformer is based on the primary conductor passing once through the transformer opening. The ratio is reduced in multiples by looping the conductor through the opening. A transformer having a ratio 200:5 changes to a ratio of 100:5 if two loops are made through the transformer with the primary conductor. The ratio of the transformer will be 50:5 if four loops are made with the primary conductor, etc.*

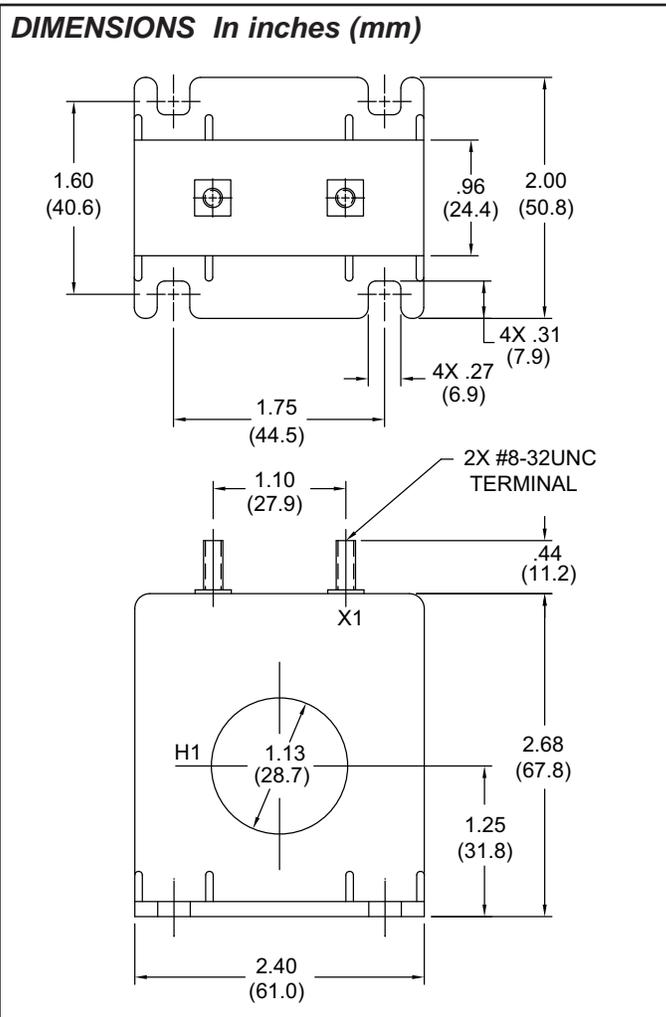

### ORDERING INFORMATION

CURRENT RATIO	ACCURACY @ 60 Hz	VA 60 Hz BURDEN	MAXIMUM OUTPUT WIRE DISTANCE BETWEEN CT AND METER				PART NUMBERS
			18 AWG	16 AWG	14 AWG	12 AWG	
50:0.1	±5.0%	2.5	Wire distance is not an issue due to the low current flow. Wires may be as long as needed.				CT005001
50:5	±3.0%	2.0	5.0 ft.	7.5 ft.	12 ft.	18 ft.	CT005050
200:5	±1.0%	4.0	10 ft.	17.5 ft.	28 ft.	43 ft.	CT020050



Do not dispose of unit in trash - Recycle

Red Lion Controls  
 Headquarters  
 20 Willow Springs Circle  
 York PA 17406  
 Tel +1 (717) 767-6511  
 Fax +1 (717) 764-0839

Red Lion Controls  
 Europe  
 Softwareweg 9  
 NL - 3821 BN Amersfoort  
 Tel +31 (0) 334 723 225  
 Fax +31 (0) 334 893 793

Red Lion Controls  
 India  
 201-B, 2nd Floor, Park Centra  
 Opp 32 Mile Stone, Sector-30  
 Gurgaon-122002 Haryana, India  
 Tel +91 984 487 0503

Red Lion Controls  
 China  
 Unit 302, XinAn Plaza  
 Building 13, No.99 Tianzhou Road  
 ShangHai, P.R. China 200223  
 Tel +86 21 6113 3688  
 Fax +86 21 6113 3683