
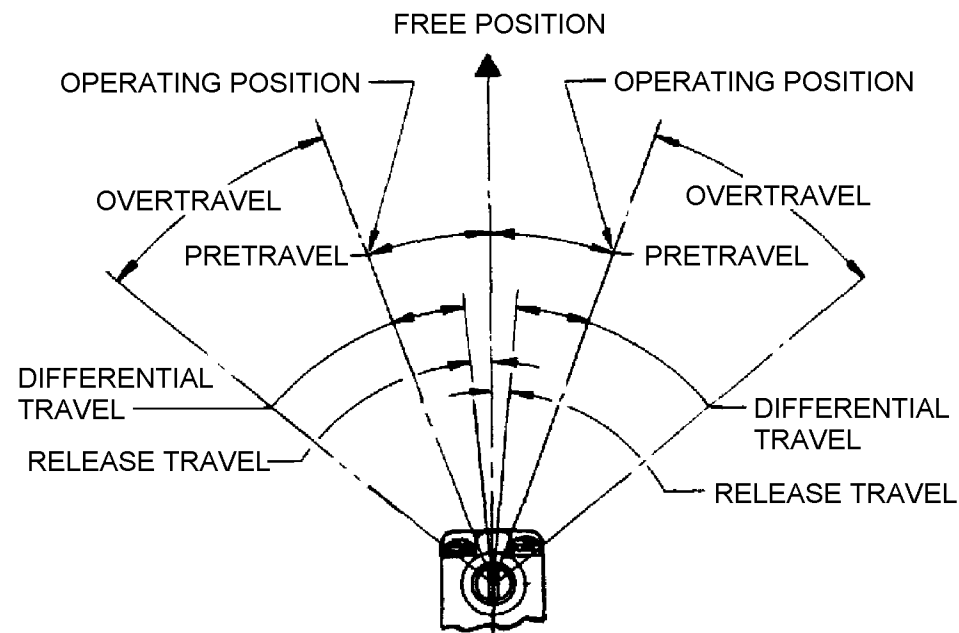
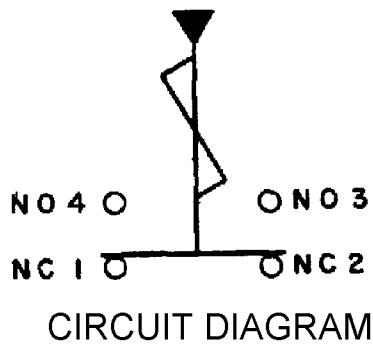
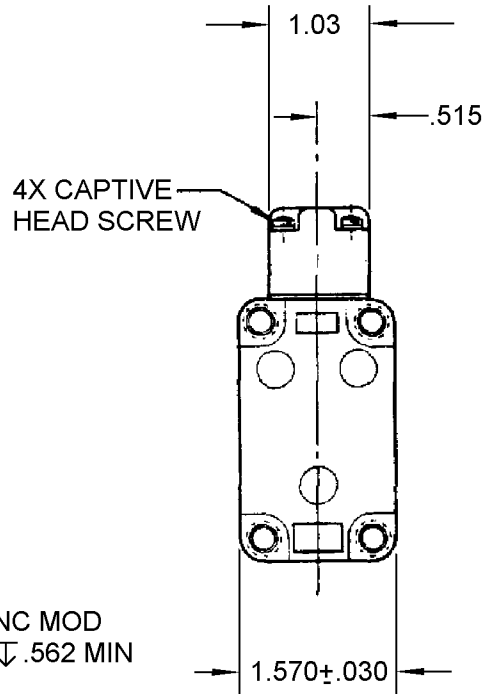
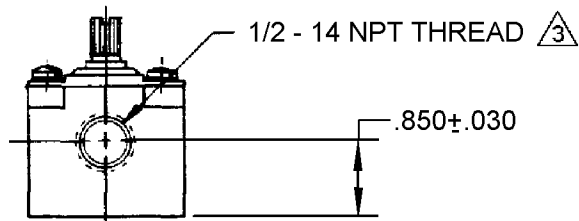
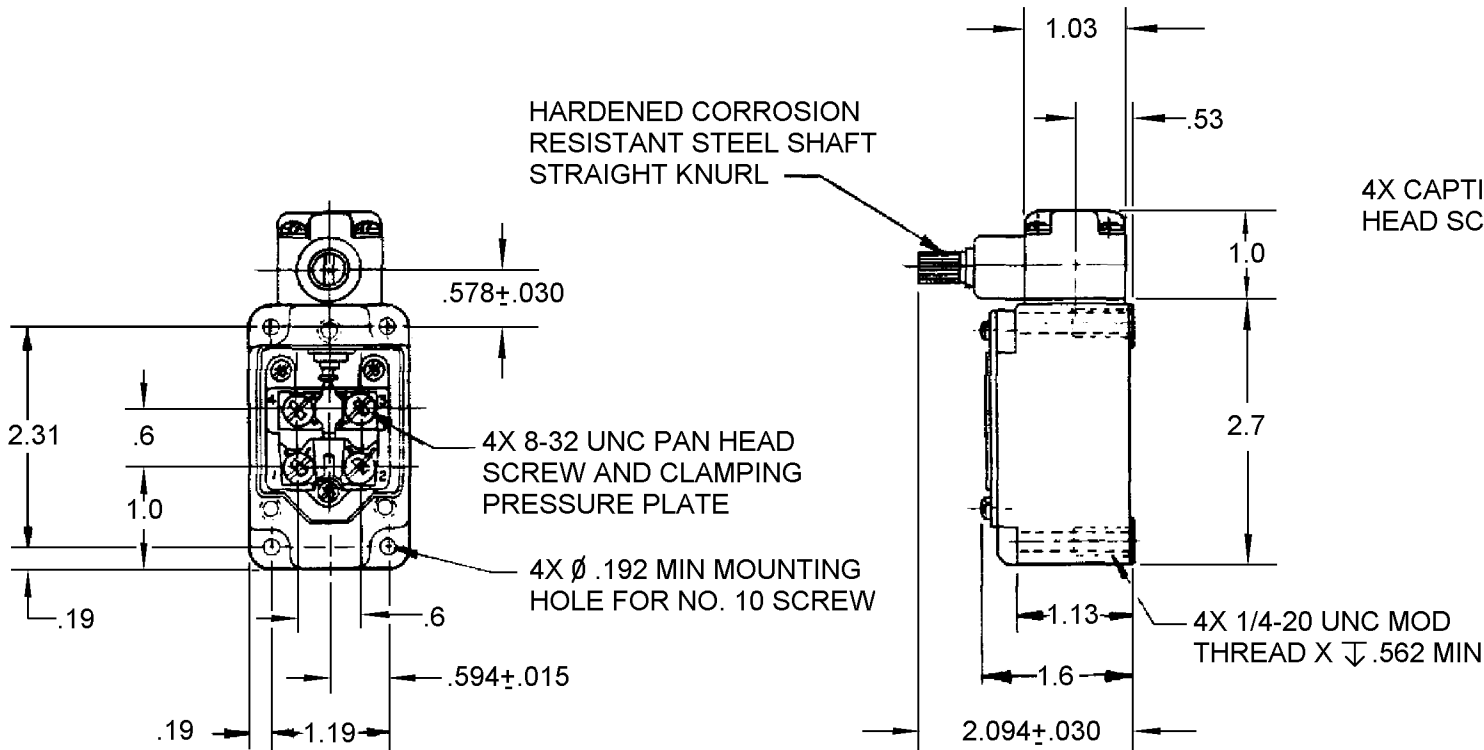


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91828

SWITCH - ENCLOSED

CATALOG LISTING
1LS22

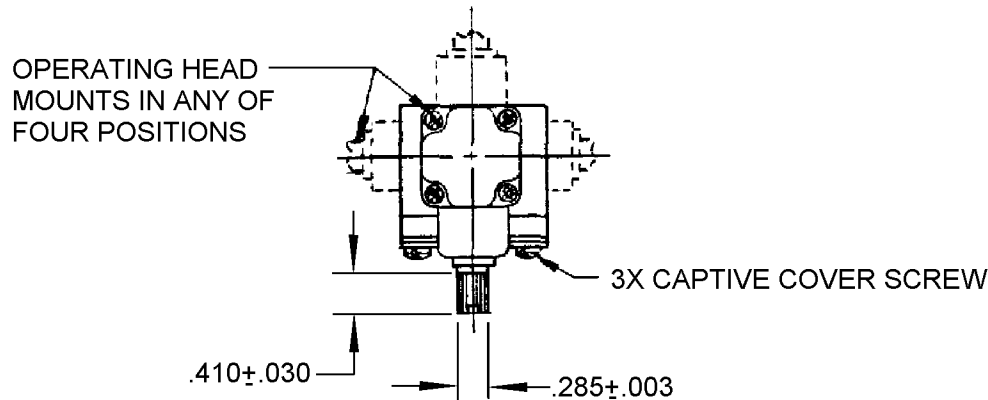

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
CHARACTERISTICS		SCALE 1/2 TO 1
ELECTRICAL DATA		DO NOT SCALE PRINT
CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
OPERATING TORQUE ----- 4 1/2 IN LB MAX		ONE PLACE (.0) ±.030
FULL OVERTRAVEL TORQUE ----- 6 IN LB MAX		TWO PLACE (.00) ±.015
RELEASE TORQUE ----- 3/4 IN LB MIN		THREE PLACE (.000) ±.005
PRETRAVEL ----- 20° MAX		ANGLES ±
DIFFERENTIAL TRAVEL ----- 12° MAX		WEIGHT
OVERTRAVEL ----- 30° MIN		
RELEASE TRAVEL ----- 5° MIN		
SWITCH-BASIC REPLACEMENT ----- 2M NI		
10A-120, 240, OR 480 VAC; 1/3 HP - 120 VAC		
3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC		
.1A - 550 VDC		
PILOT DUTY: 600 VAC MAX		

- NOTES
- 1 - SWITCH IS ASSEMBLED FOR ACTUATION IN EITHER DIRECTION BUT MAY BE ADJUSTED TO ACTUATE THE SWITCH IN THE CLOCKWISE DIRECTION ONLY, THE COUNTERCLOCKWISE DIRECTION ONLY, OR IN BOTH DIRECTIONS
 - 2 - TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION
- 3 SEAL TO BE FURNISHED BY USER

ANSI Y14.5M-1982 APPLIES