
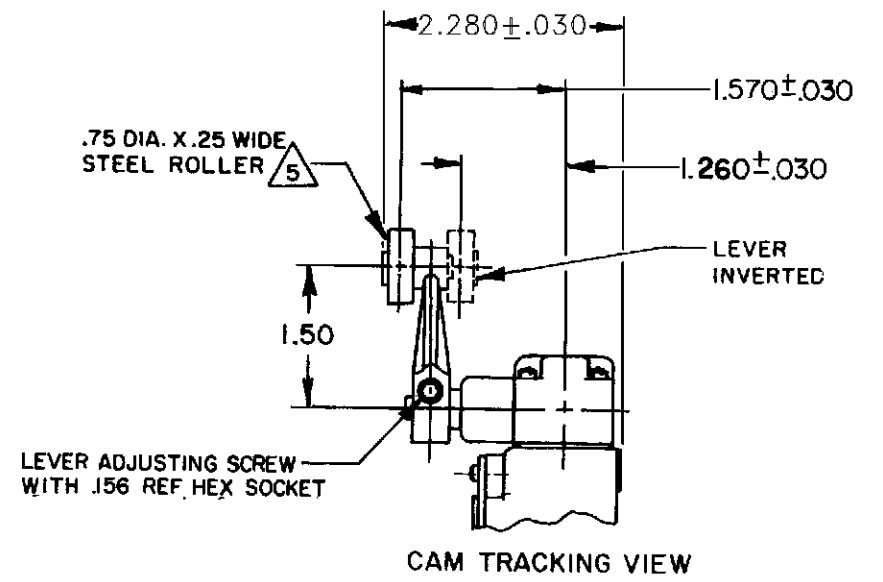
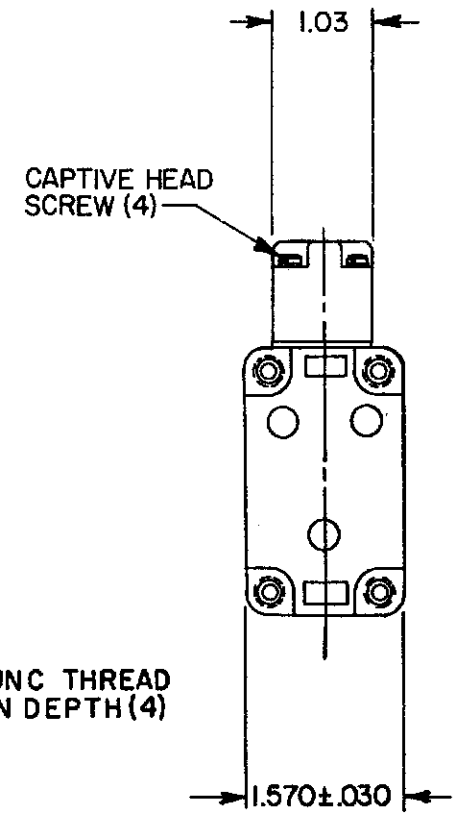
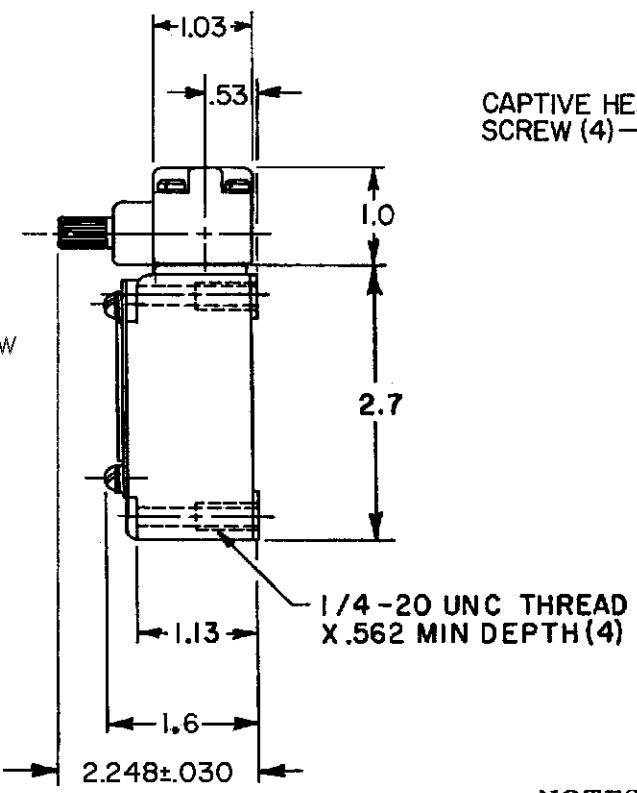
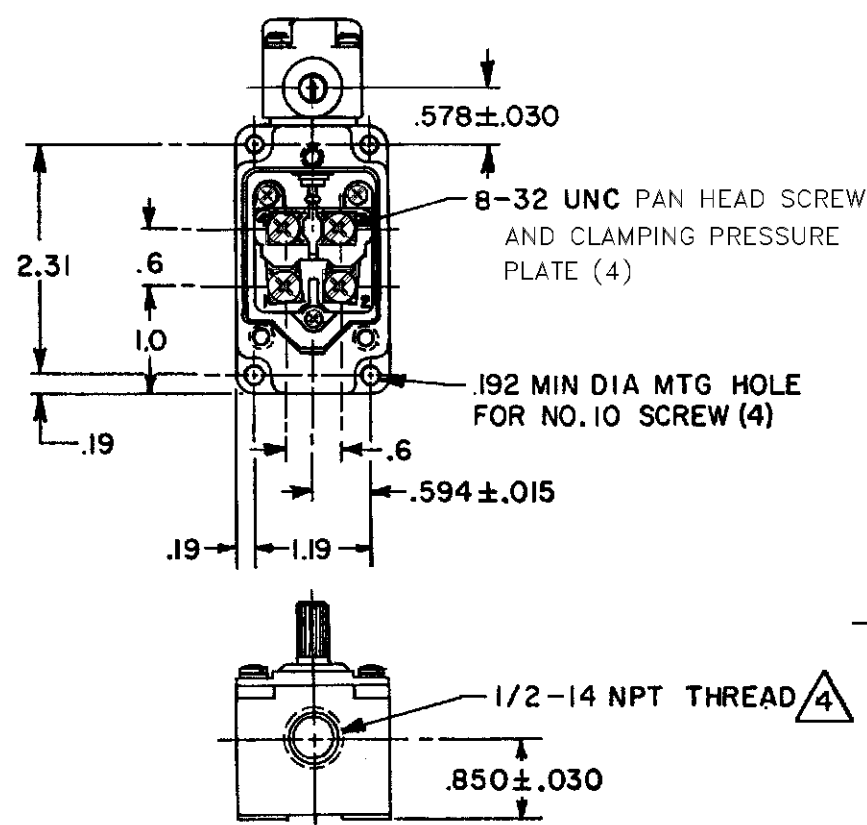
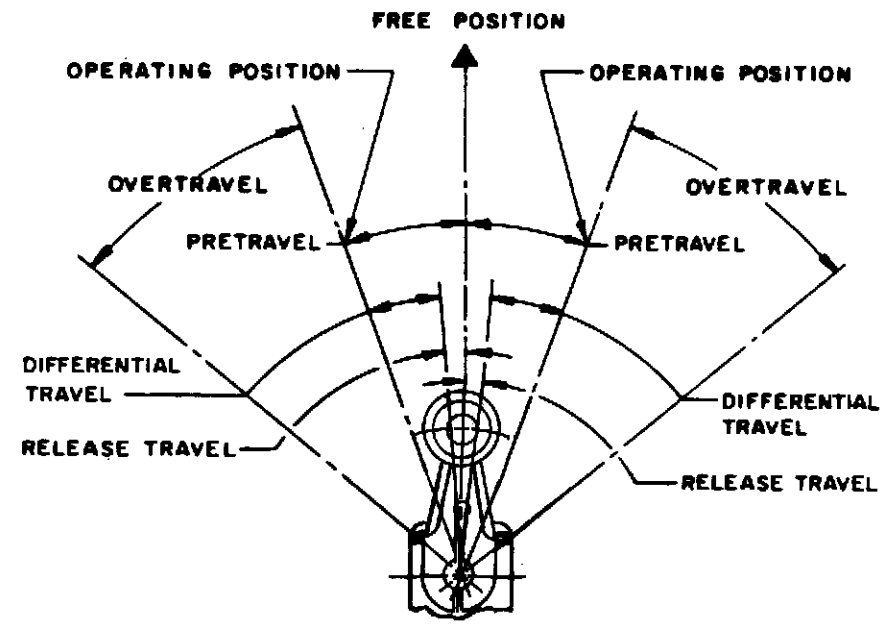



CATALOG LISTING
1LS6-L
PAGE 1 OF 1
REPLACES
PR-9854
CHECK
5 MAY 95
JAF
CHECK
29 MAR 95
GJW
DRAWN
FORMTEK

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
1LS6-L

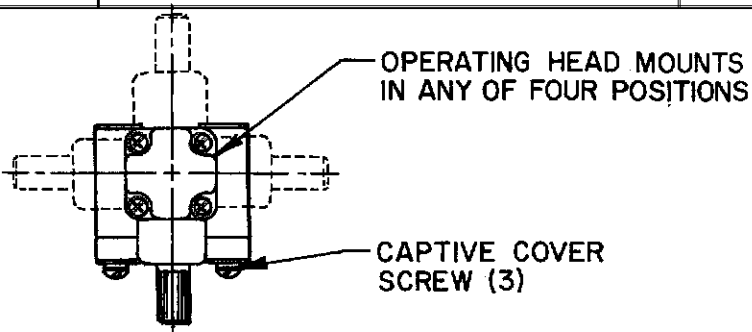

NOTES

- 1 - SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
- 2 - TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

4
5
6


SEAL TO BE FURNISHED BY USER
ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°
LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
OPERATING TORQUE -----27 IN.-OZ. MAX	CONTACT ARRANGEMENT
FULL OVERTRAVEL TORQUE -----36 IN.-OZ. MIN	(SEE CIRCUIT DIAGRAM)
RELEASE TORQUE -----4.5 IN.-OZ. MIN	L126 10A 125, 250 OR 480 VAC
PRETRAVEL -----20° MAX	1/3HP 125 VAC, 3/4HP 250 VAC
DIFFERENTIAL TRAVEL -----12° MAX	0.8A 125 VDC, 0.4A 250 VDC
OVERTRAVEL -----30° MIN	
FREE POSITION -----5° MIN	
BASIC SWITCH REPLACEMENT -----2MN1-L	



THIRD ANGLE PROJECTION



SCALE 1/2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT