MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
201LS9

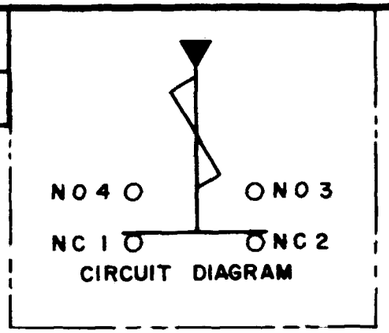

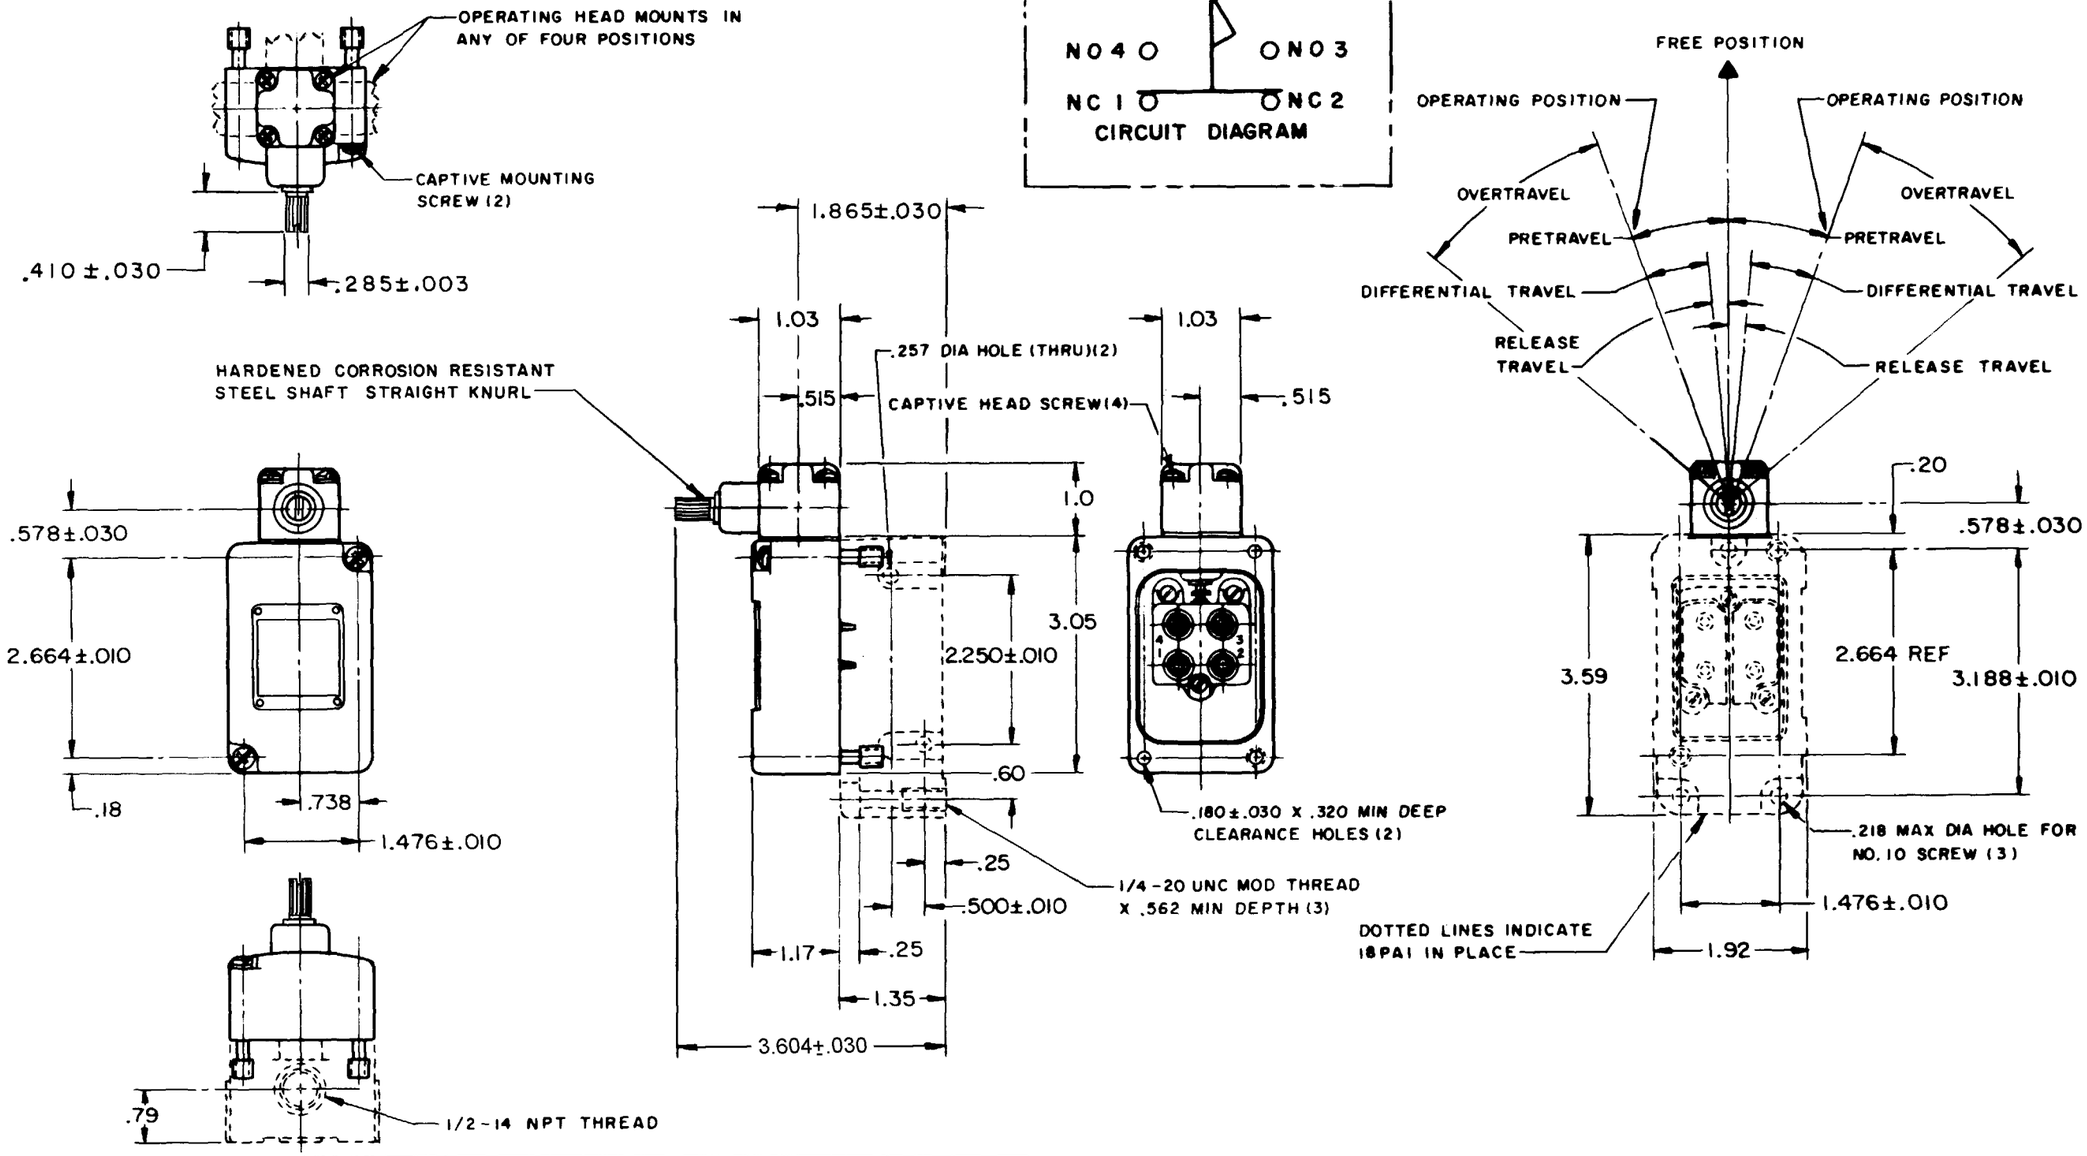

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING TORQUE	4 1/2 IN LB MAX
FULL OVERTRAVEL TORQUE	6 IN LB MAX
RELEASE TORQUE	3/4 IN LB MIN
PRETRAVEL	5° MAX
OVERTRAVEL	30° MIN
RELEASE TRAVEL	0°30' MIN
SWITCH-BASIC REPLACEMENT	2MN13

ELECTRICAL DATA

CONTACT ARRANGEMENT
(SEE CIRCUIT DIAGRAM)

10A - 120, 240 OR 480 VAC
1/4 HP - 120 VAC; 1/2 HP - 240 VAC
PILOT DUTY: 600 VAC MAX

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±1°

WEIGHT

NOTES
1 - SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
2 - TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

CATALOG LISTING 201LS9 PAGE 1 OF 1
ISSUE M 9
RELEASE NO. 24 JUNE 65
REPLACES
CHECK
REVISIONS
A C015200 MBF 22 JUN 65
B C020324 WEG 13 OCT 65
C C025152 DAW 17 APR 69
D CO-77031 JDB 22 DEC 93
E 202823 CSL 12 APR 01
DRAWN MBF 22 JUNE 65
RASTER
FO-80376-003