


# Xinger®



## Ultra Low Profile 0805 3 dB, 90° Hybrid Coupler

### Description


The C3337J5003AHF is a low cost, low profile sub-miniature high performance 3 dB coupler in an easy to use surface mount package. It is designed for LTE, WiMax and WiBro applications. The C3337J5003AHF is ideal for balanced power and low noise amplifiers, plus signal distribution and other applications where low insertion loss and tight amplitude and phase balance are required. The C3337J5003AHF is available on tape and reel for pick and place high volume manufacturing.

All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All parts have been subjected to rigorous qualification testing and units are 100% RF tested.






### Detailed Electrical Specifications: Specifications subject to change without notice.

Features:	Parameter	ROOM (25°C)			Unit
		Min.	Typ.	Max	
		Frequency	3300	3700	MHz
		Port Impedance	50		Ω
• 3300 – 3700 MHz	Return Loss	15	18		dB
• 0.7mm Height Profile	Isolation	18	22		dB
• High Isolation & Low Loss	Insertion Loss		0.2	0.3	dB
• LTE Bands: 22, 42, 43	Amplitude Balance		0.3	1.0	dB
• WiMax and WiBro applications	Phase Balance (relative to 90°)		3	7	Degrees
• Surface Mountable	Power Handling (+85 °C)			4	Watts
• Tape & Reel	Power Handling (+105 °C)			3	Watts
• Non-conductive Surface	Operating Temperature	-55		+105	°C
• RoHS Compliant	Group Delay (3.3-3.7GHz) (nSec)	Min.	Typ.	Max	
• Halogen-Free		0.050	0.055	0.060	
• 100% RF Tested					
• -55°C to 105°C					






### Outline Drawing

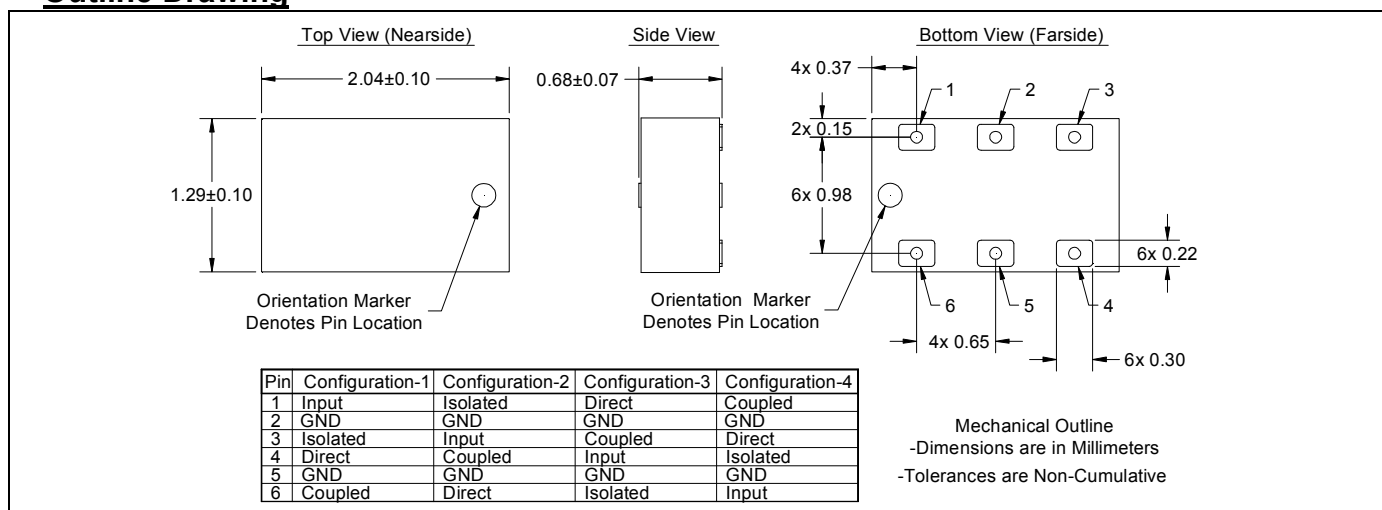

## Typical Broadband Performance: 500 MHz. to 6000 MHz.

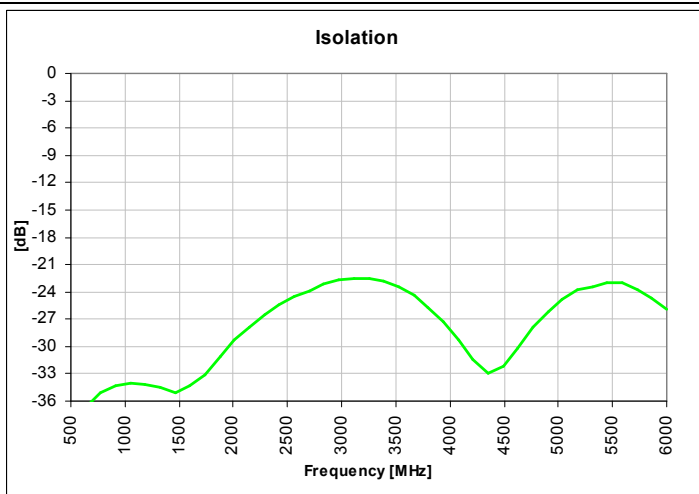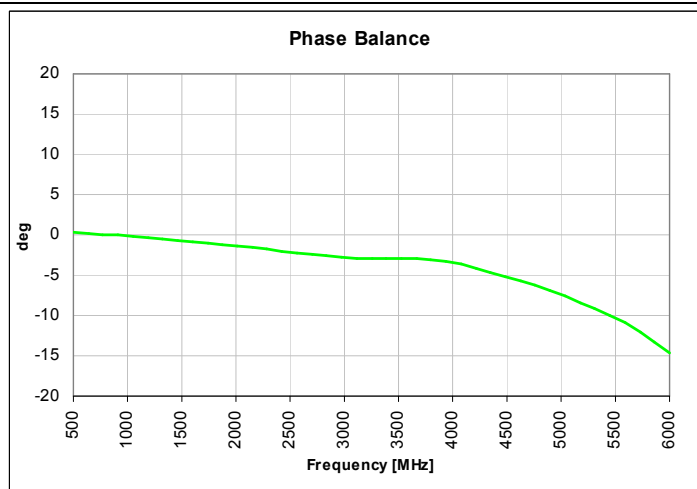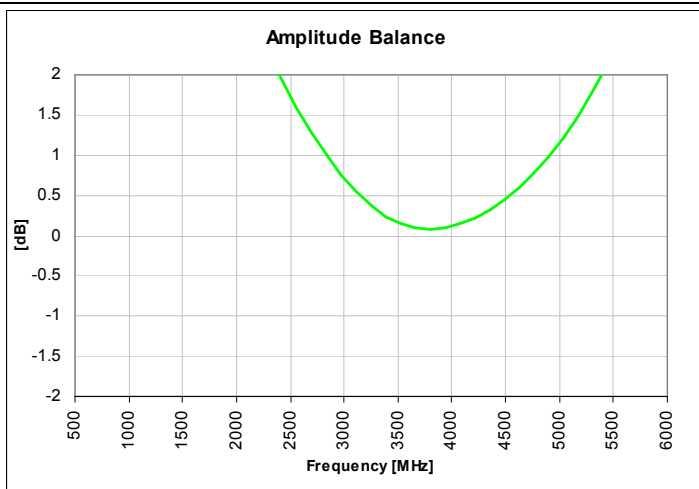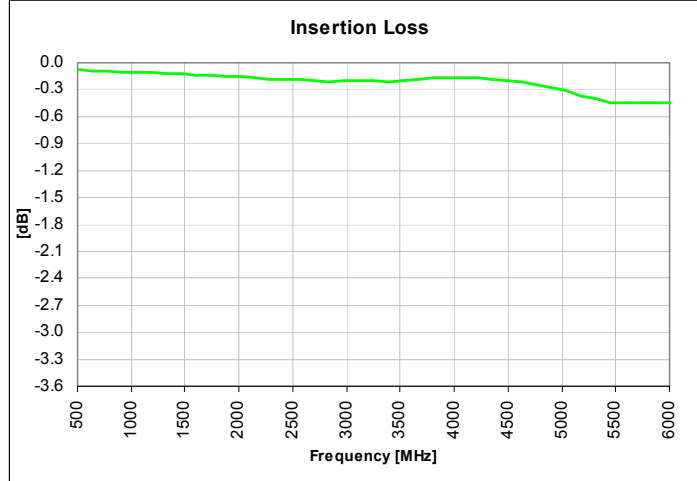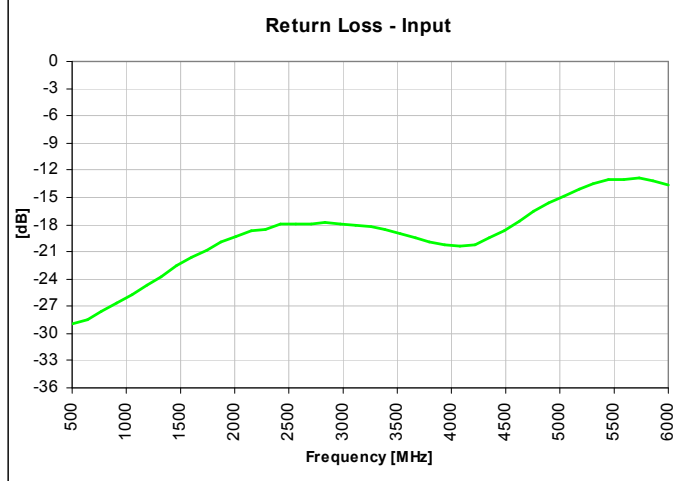

### Typical Performance: 3200 MHz. to 3800 MHz.

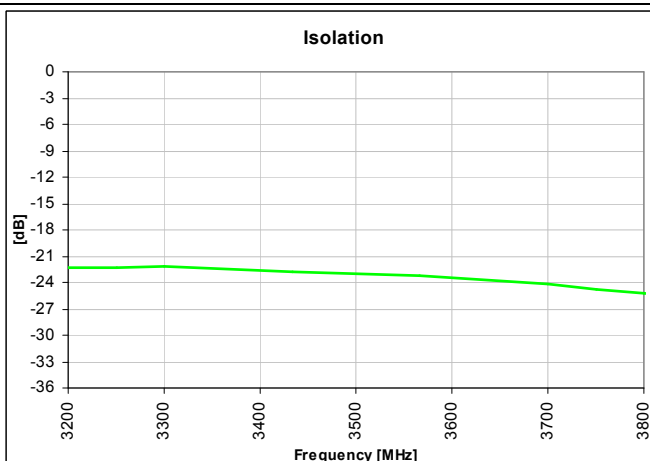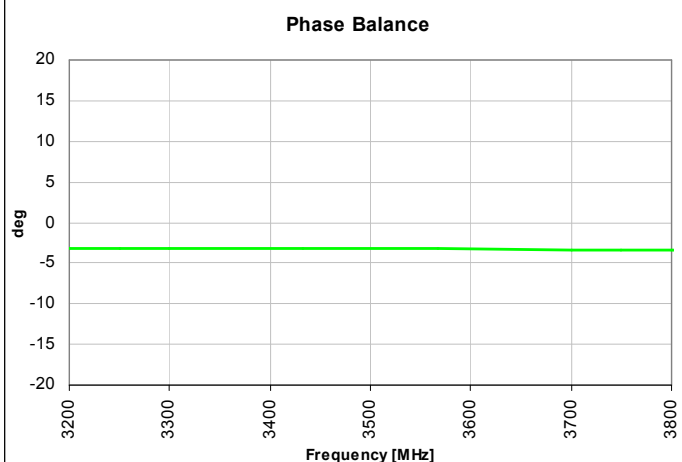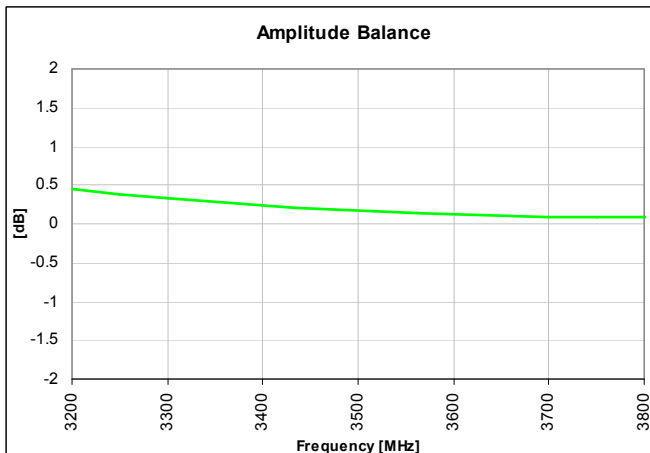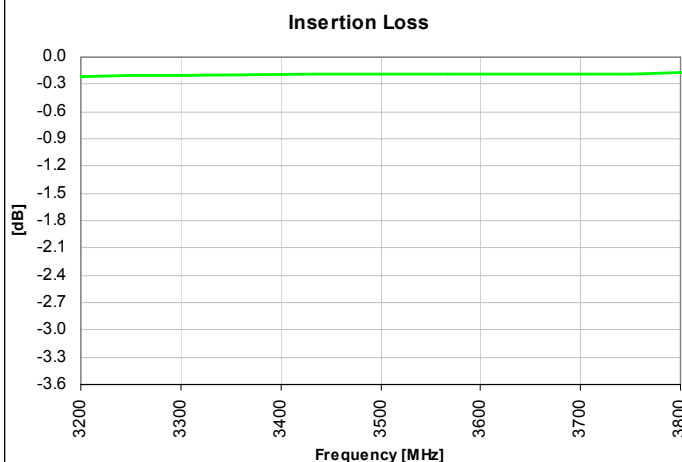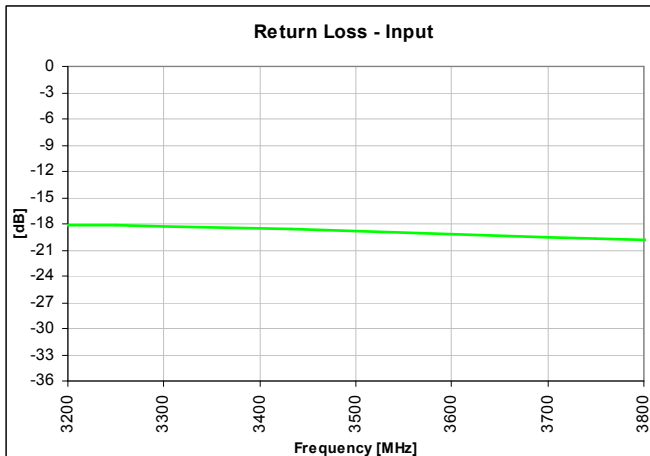

## Definition of Measured Specifications

Parameter	Definition	Mathematical Representation <i>i, j, k, m</i> is denoted as the port index of input, isolated, direct and coupled port for specific pin configuration shown in the table
Return Loss	The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR.	$20 \log_{10}( S_{ii} )$
Isolation	The input power divided by the sum of the power at the two output ports.	$20 \log_{10} S_{ji} $
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$10 \log_{10}( S_{mi} ^2 +  S_{ki} ^2)$
Amplitude Balance	The difference in power between the two outputs.	$20 \log_{10}(\frac{ S_{ki} }{ S_{mi} })$
Phase Balance	The difference in phase angle between the two output ports.	$\angle S_{ki} - \angle S_{mi} + 90^\circ$
Group Delay	Group delay is defined as the average of the mean group delay of the coupling path and the mean group delay of the direct path.	<p>Group delay (ns) =</p> $\frac{Mean(GD(S_{mi})) + Mean(GD(S_{ki}))}{2}$ <p>where "Mean" is the arithmetic mean of the group delay over a frequency band.</p>


\*100% RF test is performed per spec definition for pin configuration 1 and port 1 (input port) is connected to pin1, port 2 (isolated port) is connected to pin 3, port 3 (direct port) is connected to pin 4 and port 4 (isolated) is connected to pin 6.

### Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

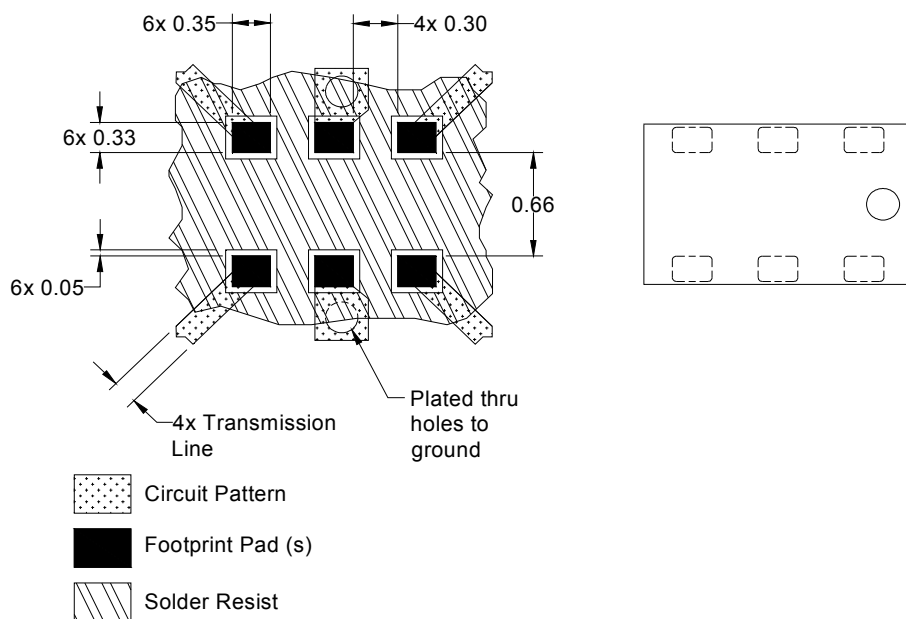

Dimensions are in Millimeters  
Mounting Footprint

## Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

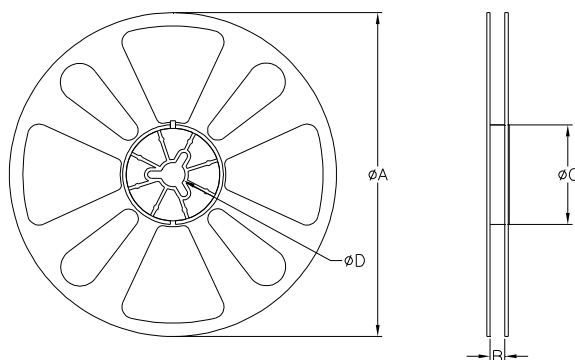
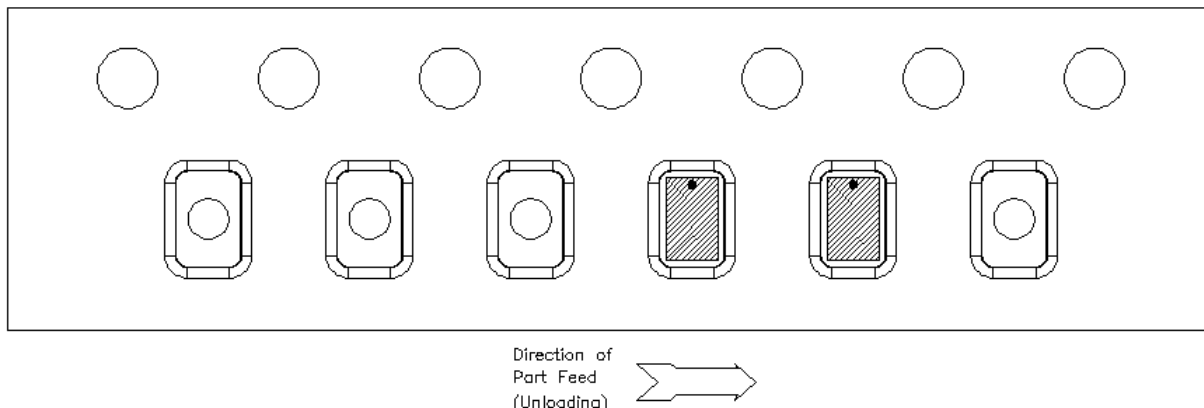


TABLE 1		
QUANTITY/REEL	REEL DIMENSIONS mm	
4000	$\phi A$	177.80
	B	8.00
	$\phi C$	50.80
	$\phi D$	13.00