

SCHEMATIC

POSITION 1
(MAINTAINED)

POSITION 2
(MAINTAINED)

SPECIFICATIONS

FUNCTION:
1P1T OFF-ON
Non-Shorting

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55:
13A 125VAC [cURus]
6.5A 250VAC [cURus]

OPERATING FORCE:
200gf Max.

CONTACT RESISTANCE:
Initial: 30m Ω Max. at 50VDC

INSULATION RESISTANCE:
500M Ω Min. at 500VDC

DIELECTRIC STRENGTH:
1,000VAC For 1 Minute

MECHANICAL LIFE:
100,000 Cycles

ELECTRICAL LIFE:
6,000 Cycles [cURus]

TEMPERATURE:
-30°C to 55°C [cURus]

APPROVALS:





RoHS LEAD FREE
COMPLIANT PROCESS COMPATIBLE

COLORS

BODY:
Metallic
ACTUATOR:
Black

MATERIALS

UPPER BODY:
Nickel Plated Steel
BASE:
Phenolic Board, UL94 V-0
ACTUATOR:
Nylon 6/6
CONTACTS
Silver
TERMINALS:
Silver Plated Copper

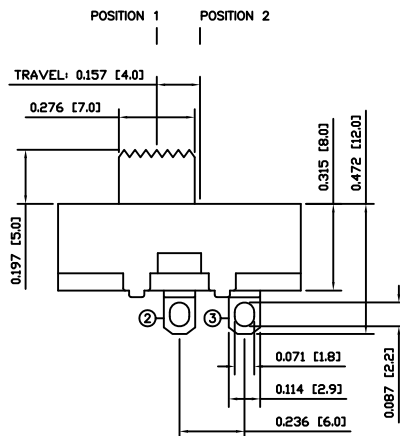

U13SS-11L04-G(A)5-00-#573

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A
REV.

INITIAL RELEASE
DESCRIPTION

18797
PCR

10/02/08
DATE

CAB
DRAWN BY

DIMENSIONS
INCHES [MILLIMETERS]
GENERAL TOLERANCES
 ± 0.008 [± 0.2] / $\pm 1^\circ$

SCALE
DRAWING NOT TO SCALE

PROJECTION
FIRST ANGLE

ITEM NUMBER
03-U13SS00076

DATE
FEBRUARY 8, 2010

REVISION
A