



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

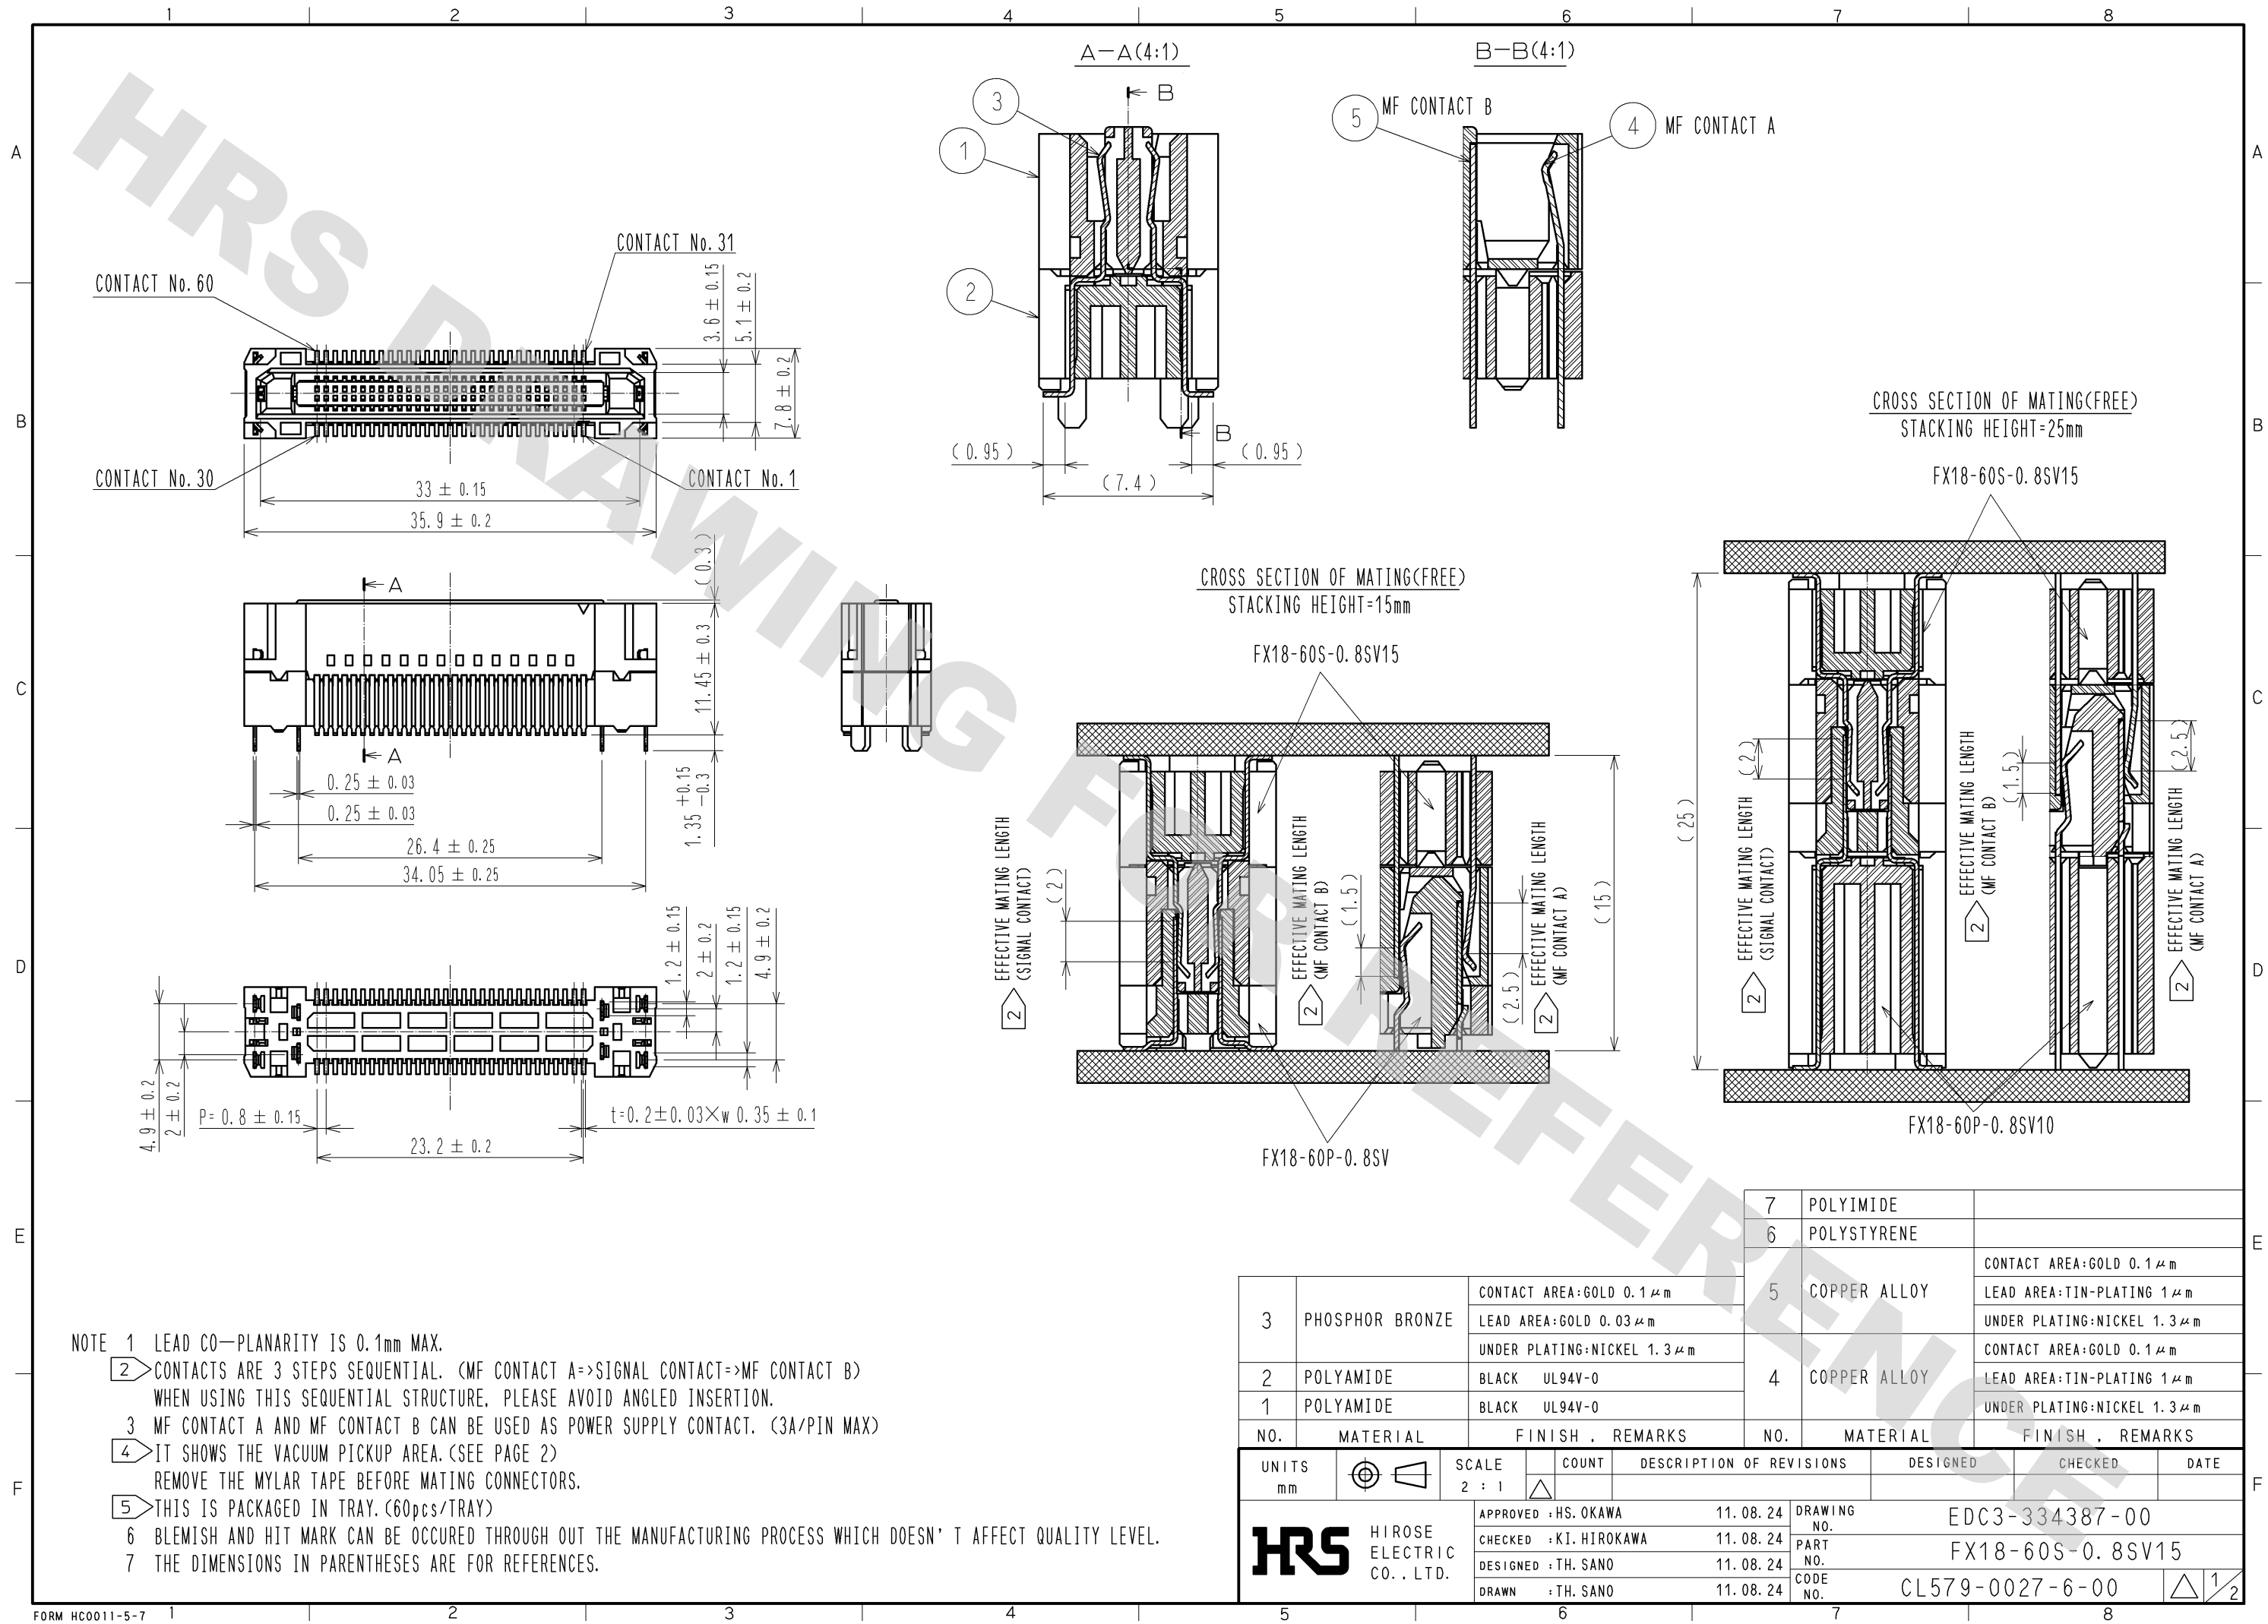

- NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.
- 2 CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.
- 3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
- 4 IT SHOWS THE VACUUM PICKUP AREA. (SEE PAGE 2)
REMOVE THE MYLAR TAPE BEFORE MATING CONNECTORS.
- 5 THIS IS PACKAGED IN TRAY. (60pcs/TRAY)
- 6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
- 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm	7	POLYIMIDE	
		LEAD AREA:GOLD 0.03 μm	6	POLYSTYRENE	
		UNDER PLATING:NICKEL 1.3 μm	5	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm LEAD AREA:TIN-PLATING 1 μm UNDER PLATING:NICKEL 1.3 μm
2	POLYAMIDE	BLACK UL94V-0	4	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm LEAD AREA:TIN-PLATING 1 μm UNDER PLATING:NICKEL 1.3 μm
1	POLYAMIDE	BLACK UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : HS. OKAWA	11.08.24	DRAWING NO.	EDC3-334387-00
		CHECKED : KI. HIROKAWA	11.08.24	PART NO.	FX18-60S-0.8SV15
		DESIGNED : TH. SANO	11.08.24	CODE NO.	CL579-0027-6-00
		DRAWN : TH. SANO	11.08.24		

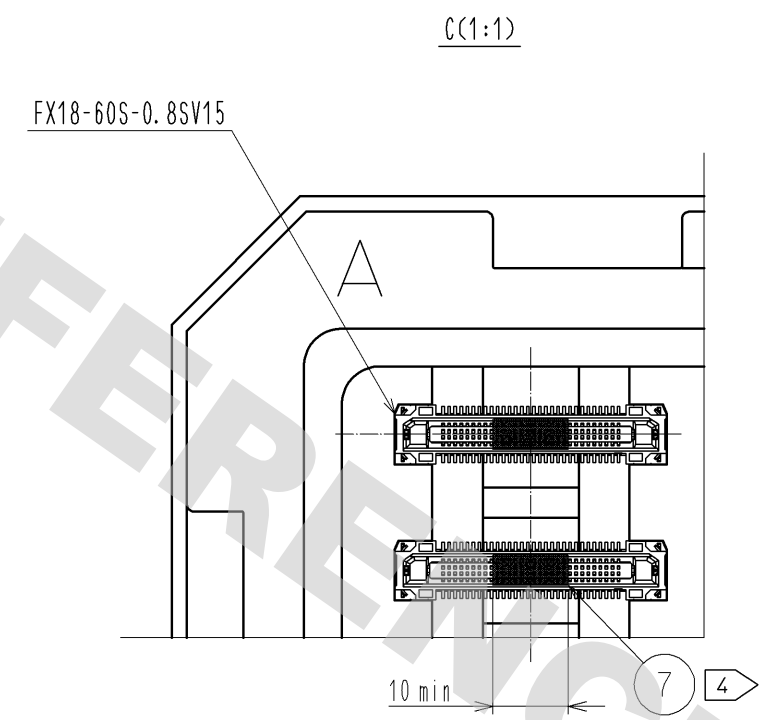

	DRAWING NO.	EDC3-334387-00		
	PART NO.	FX18-60S-0.8SV15		
	CODE NO.	CL579-0027-6-00	△	2/2