

32-bit L Series MCUs

Kinetis KL2x Family

Ultra-low-power MCUs with USB OTG


Target Applications

- Low-power applications
- Battery-operated applications
- USB peripherals
- Consumer applications

Overview

The Kinetis KL2x MCU family is pin, software and tool compatible with all other Kinetis L families, and adds a Full-Speed USB 2.0 On-The-Go controller with an integrated low-voltage regulator. The Kinetis KL2x MCU family is also compatible with the Kinetis K20 family of MCUs built on the ARM® Cortex™-M4 core, providing a migration path to higher performance and feature integration. Devices start from 32 KB of flash in a small-footprint 5 x 5 mm 32 QFN package, extending up to 256 KB in a 100 LQFP/121 MBGA package. Each family member combines ultra-low-power performance with a rich suite of analog, communication, timing and control peripherals.

Kinetis KL2x MCU Family Block Diagram

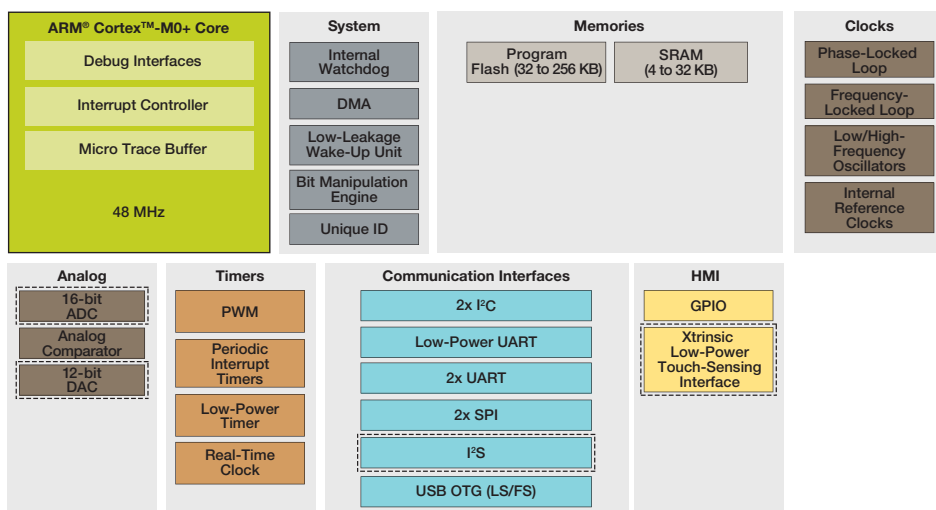

Standard Optional



Features

Ultra Low Power

- Next-generation 32-bit ARM Cortex-M0+ core. Two times more CoreMark/mA than the closest 8/16-bit architecture. Single-cycle fast I/O access port facilitates bit banging and software protocol emulation, maintaining an 8-bit “look and feel.”
- Multiple flexible low-power modes, including new compute mode which reduces dynamic power by placing peripherals in an asynchronous stop mode
- LPUART, SPI, I²C, ADC, DAC, LP timer and DMA support low-power mode operation without waking up the core

Flash and SRAM

- Up to 256 KB flash with 64 byte flash cache, up to 32 KB RAM
- Security circuitry to prevent unauthorized access to RAM and flash contents

Performance

- ARM Cortex-M0+ core, 48 MHz core frequency over full voltage and temperature range (-40 °C +105 °C)
- Bit manipulation engine for improved bit handling of peripheral modules
- Thumb instruction set combines high code density with 32-bit performance
- Up to 4-ch. DMA for peripheral and memory servicing with reduced CPU loading and faster system throughput
- Independent-clocked COP guards against clock skew or code runaway for fail-safe applications

Mixed Signal

- Up to 16-bit ADC with configurable resolution, sample time and conversion speed/power. Integrated temperature sensor. Single or differential input mode operation in order to achieve improved noise rejection
- High-speed comparator with internal 6-bit DAC
- 12-bit DAC with DMA support

Timing and Control

- One 6-ch. and two 2-ch., 16-bit low-power timer PWM modules with DMA support
- 2-ch. 32-bit periodic interrupt timer provides time base for RTOS task schedule or trigger source for ADC conversion
- Low-power timer allows operation in all power modes except for VLLS0
- Real-time clock

HMI

- Capacitive touch sense interface supports up to 16 external electrodes and DMA data transfer
- GPIO with pin interrupt support, DMA request capability and other pin control options


Connectivity and Communications

- USB 2.0 On-The-Go (Full Speed). Integrated USB low-voltage regulator supplies up to 120 mA off chip at 3.3 volts to power external components from 5-volt input
- Two I²C with DMA support, up to 400 Kb/s and compatible with SMBus V2 features
- One LPUART and two UART with DMA support
- Two SPI with DMA support
- I²S module for audio applications

Software and Tools

- Freescale Tower System hardware development environment and low-cost demo board
- Integrated development environments
 - CodeWarrior for Microcontrollers V10.x (Eclipse) IDE with Processor Expert software modeling tool
 - IAR Embedded Workbench, Keil MDK, Atollic
- Runtime software and RTOS
 - MQX™ Lite, FreeRTOS, CodeSourcery G++ (GNU)
- Full ARM ecosystem support

Kinetis KL2x MCU Family: Cash Counter

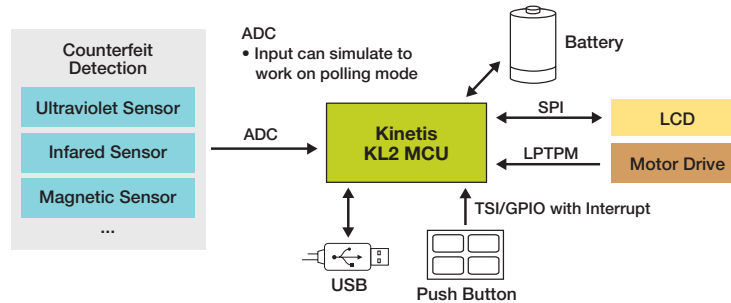

Kinetis KL2x Family Options

Sub-Family	Part Number	CPU (MHz)	Memory		Features													Package						
			Flash (KB)	SRAM (KB)	DMA	UART	SPI	I ² C	TSI	I ² S	RTC	12-bit DAC	16-bit ADC w/ DP Ch.	12-bit ADC	Total I/Os	Other	FM	FT	LH	LK	LL	MC	MP	
																	32 QFN (5 x 5, 0.5 mm)	48 QFN (7 x 7, 0.5 mm)	64 LQFP (10 x 10, 0.5 mm)	80 LQFP (12 x 12, 0.5 mm)	100 LQFP (14 x 14, 0.5 mm)	121 MAPBGA (8 x 8, 0.65 mm)	64 MAPBGA (5 x 5, 0.5 mm)	
KL24	MKL24Z32xxx4	48 MHz	32	4	√	3	2	2			√			√	23-66	USB 2.0 FS OTG/Host/Device	√	√	√	√				
	MKL24Z64xxx4	48 MHz	64	8	√	3	2	2			√			√	23-66	USB 2.0 FS OTG/Host/Device	√	√	√	√				
KL25	MKL25Z32xxx4	48 MHz	32	4	√	3	2	2	√		√	√	√	√	23-66	USB 2.0 FS OTG/Host/Device	√	√	√	√				
	MKL25Z64xxx4	48 MHz	64	8	√	3	2	2	√		√	√	√	√	23-66	USB 2.0 FS OTG/Host/Device	√	√	√	√				
	MKL25Z128xxx4	48 MHz	128	16	√	3	2	2	√		√	√	√	√	23-66	USB 2.0 FS OTG/Host/Device	√	√	√	√				
KL26	MKL26Z32xxx4	48 MHz	32	4	√	3	2	2	√	√	√	√	√	√	23-50	USB 2.0 FS OTG/Host/Device	√	√	√					
	MKL26Z64xxx4	48 MHz	64	8	√	3	2	2	√	√	√	√	√	√	23-50	USB 2.0 FS OTG/Host/Device	√	√	√					
	MKL26Z128xxx4	48 MHz	128	16	√	3	2	2	√	√	√	√	√	√	23-80	USB 2.0 FS OTG/Host/Device	√	√	√		√	√	√	
	MKL26Z256xxx4	48 MHz	256	32	√	3	2	2	√	√	√	√	√	√	50-80	USB 2.0 FS OTG/Host/Device			√		√	√	√	√

For current information about Kinetis products and documentation, please visit freescale.com/Kinetis/Lseries

Freescale, the Freescale logo, CodeWarrior, the Energy Efficient Solutions logo, Kinetis and Processor Expert are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Tower and Xtrinsic are trademarks of Freescale Semiconductor, Inc. ARM is the registered trademark of ARM Limited. ARM Cortex-M4 and ARM Cortex-M0+ are trademarks of ARM Limited. All other product or service names are the property of their respective owners. © 2012, 2013 Freescale Semiconductor, Inc.

Doc Number: LSERIESKL2FS REV 4

