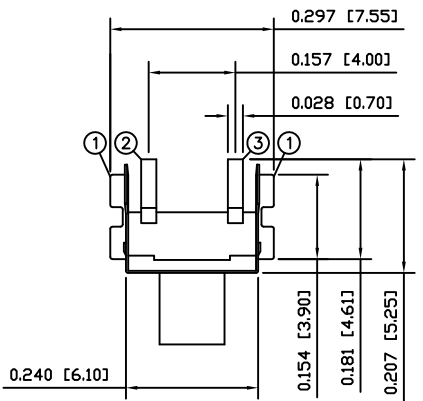

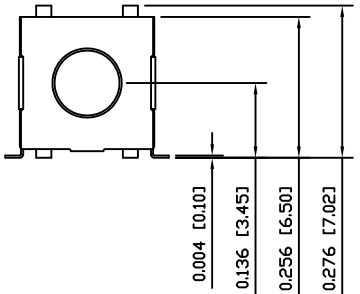

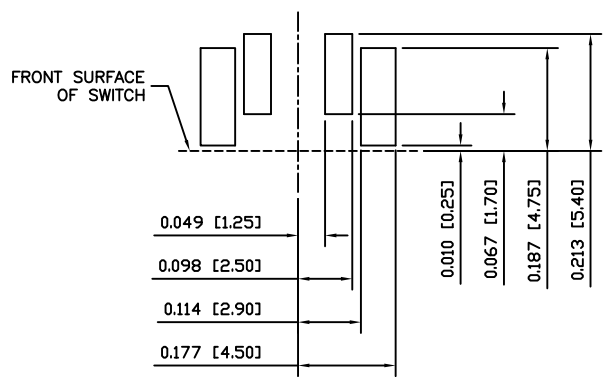


1	2	3	4	5	6	7	8																																														
SHEET 1 OF 1		PACKAGING		SCHEMATIC		SPECIFICATIONS																																															
		PACKAGING TYPE: Tape and Reel QUANTITY: 500 Pieces Per Reel				FUNCTION: 1P1T OFF-(ON), Washable RATINGS: 50mA 12VDC OPERATING FORCE: 260±70gf TRAVEL: 0.018±0.008 [0.45±0.2] CONTACT RESISTANCE: Initial: 100mΩ Max. INSULATION RESISTANCE: 100MΩ Min. at 500VDC DIELECTRIC STRENGTH: 250VAC For 1 Minute ELECTRICAL LIFE: 500,000 Cycles SHOCK RESISTANCE: Mil-Std. 202F, Method 213B VIBRATION RESISTANCE: Mil-Std. 202F, Method 201A TEMPERATURE: Operating: -25°C to 70°C Storage: -30°C to 80°C APPROVALS: RoHS LEAD FREE COMPLIANT PROCESS COMPATIBLE																																															
																																																					
SUGGESTED PCB LAYOUT						MATERIALS																																															
						BODY: Polyamide 6/6 (PA66), UL94 V-0 COVER: Nickel Silver ACTUATOR: Silicone Rubber CONTACTS: Silver Clad Phosphor Bronze TERMINALS: Silver Plated Brass																																															
						COLORS ACTUATOR: Red																																															
<table><tr><td>BODY</td><td>A</td><td>09/09/24</td><td>CAB</td></tr><tr><td>COLORS</td><td>A</td><td>09/09/14</td><td>CAB</td></tr><tr><td>MATERIALS</td><td>A</td><td>09/09/14</td><td>CAB</td></tr><tr><td>PACKAGING</td><td>A</td><td>09/09/14</td><td>CAB</td></tr><tr><td>SPECIFICATIONS</td><td>A</td><td>09/09/14</td><td>CAB</td></tr><tr><td>REFERENCE</td><td>REV.</td><td>DATE</td><td>BY</td></tr></table>		BODY	A	09/09/24	CAB	COLORS	A	09/09/14	CAB	MATERIALS	A	09/09/14	CAB	PACKAGING	A	09/09/14	CAB	SPECIFICATIONS	A	09/09/14	CAB	REFERENCE	REV.	DATE	BY	THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED		<table><tr><td>A</td><td>INITIAL RELEASE</td><td>PCRD0109</td><td>09/09/24</td><td>CAB</td></tr><tr><td>REV.</td><td>DESCRIPTION</td><td>PCR</td><td>DATE</td><td>DRAWN BY</td></tr></table>		A	INITIAL RELEASE	PCRD0109	09/09/24	CAB	REV.	DESCRIPTION	PCR	DATE	DRAWN BY	<table><tr><td colspan="2">DIMENSIONS</td><td colspan="2">INCHES [MILLIMETERS]</td></tr><tr><td colspan="2">GENERAL TOLERANCES</td><td colspan="2">±0.008 [±0.2] / ±1°</td></tr><tr><td>SCALE</td><td>DRAWING NOT TO SCALE</td><td>PROJECTION</td><td>THIRD ANGLE</td></tr></table>		DIMENSIONS		INCHES [MILLIMETERS]		GENERAL TOLERANCES		±0.008 [±0.2] / ±1°		SCALE	DRAWING NOT TO SCALE	PROJECTION	THIRD ANGLE
BODY	A	09/09/24	CAB																																																		
COLORS	A	09/09/14	CAB																																																		
MATERIALS	A	09/09/14	CAB																																																		
PACKAGING	A	09/09/14	CAB																																																		
SPECIFICATIONS	A	09/09/14	CAB																																																		
REFERENCE	REV.	DATE	BY																																																		
A	INITIAL RELEASE	PCRD0109	09/09/24	CAB																																																	
REV.	DESCRIPTION	PCR	DATE	DRAWN BY																																																	
DIMENSIONS		INCHES [MILLIMETERS]																																																			
GENERAL TOLERANCES		±0.008 [±0.2] / ±1°																																																			
SCALE	DRAWING NOT TO SCALE	PROJECTION	THIRD ANGLE																																																		
1		2		3		4																																															
5		6		7		8																																															
				E-SWITCH		LAMB INDUSTRIES																																															
				TSAMW-3.3-260-U-TR																																																	
				DRAWING NUMBER 06-TSAMW33260SUTR		DATE SEPTEMBER 24, 2009																																															
						REVISION A																																															