

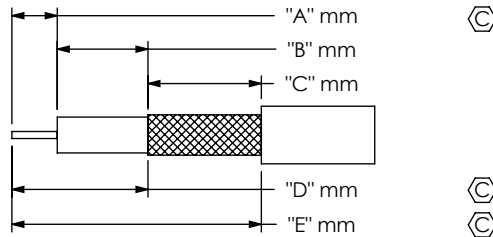
DO NOT
SCALE FROM
THIS PRINTFIG 2
CABLE STRIPPING DIMENSIONS
PER CONFIGURATIONS
(SEE TABLE 1)(SEE NOTE 12,13,14,15)

TABLE 1

	CABLE CUT LENGTH	HI POT
STYLE	SUBTRACTOR	DCV
-72SPX	7.3 [0.29]	1000
-72RPX	2.0 [0.08]	1000
-74SPX	10.3 [0.41]	1000
-74BJX	13.4 [0.53]	1000
-77SPX	7.5 [0.29]	1000
-77RPX	2.9 [0.11]	1000
-D4SPX	10.3 [0.41]	1000
-78SPX	15.7 [0.62]	1000
-79SPX	8.7 [0.34]	1000
-79RPX	5.3 [0.21]	1000
-73SPX	5.5 [0.22]	1000
* -7GSJX	4.7 [0.19]	1000
-7VRPX	1.7 [0.07]	1000
-7VSJX	4.7 [0.19]	1000
-SING	0.0 [0.00]	1000
-XXXXXX	0.0 [0.00]	1000

TABLE 2: FINAL ASSEMBLY LENGTH TOLERANCE

LENGTH	TOLERANCE
0100-0200 [3.92-7.87]	+3.0 [.12]/-0.0 [.00]
0200-0500 [7.87-19.69]	+5.0 [.20]/-0.0 [.00]
0500-1100 [19.69-43.30]	+10.0 [.40]/-0.0 [.00]
>1100 [43.30]	± 1%

CABLE CALLOUT
179: CCA-179 (RG-179 COAXIAL CABLE)

END 1 CONNECTOR

-72SP: MCX7-P-C-XX-ST-CA3 (SEE SHEET 2)
-72RP: MCX7-P-C-XX-RA-CA3 (SEE SHEET 2)
-74SP: BNC7T-P-C-XX-ST-CA3 (SEE SHEET 2)
-74BJ: BNC7T-J-C-XX-ST-BH3 (SEE SHEET 2)
-77SP: SMB7H-P-C-XX-ST-CA3 (SEE SHEET 2)
-77RP: SMB7H-P-C-XX-RA-CA3 (SEE SHEET 2)
-D4SP: BNC7T-P-C-XX-ST-CA3D (SEE SHEET 3)
-78SP: DIN7A-PP-C-XX-ST-CA3 (SEE SHEET 3)
-79SP: MBNC7-P-C-XX-ST-CA3 (SEE SHEET 3, SEE NOTE 18)
-79RP: MBNC7-P-C-XX-RA-CA3 (SEE SHEET 3, SEE NOTE 18)
-73SP: MMCX7-P-C-XX-ST-CA3 (SEE SHEET 3)
*-7GSJ: GRF7-J-C-XX-ST-CA3 (SEE SHEET 4)
-7VRP: GRF7V-P-C-XX-RA-CA3 (SEE SHEET 4)
-7VSJ: GRF7V-J-C-XX-ST-CA3 (SEE SHEET 4)

END 1 PLATING OPTION

1: GOLD ALL COMPONENTS
2: GOLD / NICKEL COMBINATION
3: ALTERNATE GOLD / NICKEL
4: ALTERNATE GOLD / GOLD FLASH / NICKEL
5: ALTERNATE GOLD / GOLD / NICKEL
6: ALTERNATE H GOLD / H GOLD / NICKEL
8: ALTERNATE HEAVY GOLD / GOLD FLASH / NICKEL
(SEE SHEET 2 AND 3 FOR PLATING SPECIFICS)

* = NOT RELEASED FOR PRODUCTION

OVERALL CABLE LENGTH
MILLIMETERS OF CABLE
0100 MIN. (SEE NOTE 8 & 9)

END 2 PLATING OPTION

1: GOLD ALL COMPONENTS
2: GOLD / NICKEL COMBINATION
3: ALTERNATE GOLD / NICKEL
4: ALTERNATE GOLD / GOLD FLASH / NICKEL
5: ALTERNATE GOLD / GOLD / NICKEL
6: ALTERNATE H GOLD / H GOLD / NICKEL
8: ALTERNATE HEAVY GOLD / GOLD FLASH / NICKEL
(SEE SHEET 2 AND 3 FOR PLATING SPECIFICS)
(LEAVE BLANK FOR -SING OR -XXXXXX
END 2 PREPARATION)

END 2 CONNECTOR OR PREPARATION

-72SP: MCX7-P-C-XX-ST-CA3 (SEE SHEET 2)
-72RP: MCX7-P-C-XX-RA-CA3 (SEE SHEET 2)
-74SP: BNC7T-P-C-XX-ST-CA3 (SEE SHEET 2)
-74BJ: BNC7T-J-C-XX-ST-BH3 (SEE SHEET 2)
-77SP: SMB7H-P-C-XX-ST-CA3 (SEE SHEET 2)
-77RP: SMB7H-P-C-XX-RA-CA3 (SEE SHEET 2)
-D4SP: BNC7T-P-C-XX-ST-CA3D (SEE SHEET 3)
-78SP: DIN7A-PP-C-XX-ST-CA3 (SEE SHEET 3)
-79SP: MBNC7-P-C-XX-ST-CA3 (SEE SHEET 3, SEE NOTE 18)
-79RP: MBNC7-P-C-XX-RA-CA3 (SEE SHEET 3 SEE NOTE 18)
-73SP: MMCX7-P-C-XX-ST-CA3 (SEE SHEET 3)
*-7GSJ: GRF7-J-C-XX-ST-CA3 (SEE SHEET 4)
-7VRP: GRF7V-P-C-XX-RA-CA3 (SEE SHEET 4)
-7VSJ: GRF7V-J-C-XX-ST-CA3 (SEE SHEET 4)
-SING: SINGLE ENDED (ONE END ONLY, SEE NOTE 11)
-XXXXX: STRIPPED AND TINNED (THIS END ONLY-
SEE NOTES 11-15 & 17, SHEET 2, FIG. 3)

(SEE FIG. 2) "C" FORMAT: X.X
(SEE FIG. 2) "B" FORMAT: X.X
(SEE FIG. 2) "A" FORMAT: X.X

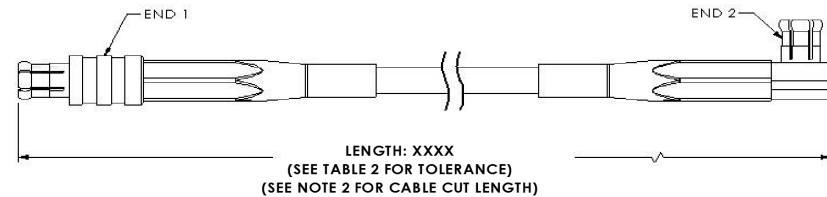
DO NOT LEAVE ANY SPACE BLANK,
EACH MUST CONTAIN A
NUMERIC CHARACTER 0 THRU 9.

FIG 1

RF179-72SPX-72RPX-XXXX SHOWN
CABLE STRIPPING DIMENSIONS
PER END 1 AND END 2 ASSEMBLY PRINTS
OR STRIPPED AND TINNED
(SEE NOTES 11-15, SHEET 2, FIG. 3)

THIS PRODUCT MANUFACTURED
WITH LEAD-FREE PROCESSING

F:\DWG\MISC\MKTG\RF179-XXXXX-XXXXXX-XXXX-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN
MILLIMETERS [INCHES].
TOLERANCES ARE:

DECIMALS ANGLES
.X: ±0.3 [.01] 2°
.XX: ±0.13 [.005]
.XXX: ±0.051 [.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
SEE END 1 AND END 2 ASSEMBLY PRINTS

SHEET SCALE: 2:1

DESCRIPTION:

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

RF179 CABLE ASSEMBLY

DWG. NO.

RF179-XXXXX-XXXXXX-XXXX

BY: B. RAY

1-30-2007

SHEET 1 OF 4

NOTES:


* = NOT RELEASED FOR PRODUCTION

- ③ REPRESENTS A CRITICAL DIMENSION
- CABLE CUT LENGTH:
= (LENGTH: XXXX) - (SUBTRACTOR FOR END 1) - (SUBTRACTOR FOR END 2)
(SEE TABLE 1 FOR SUBTRACTORS)
- ③ 3. ASSEMBLY TO BE 100% TESTED FOR OPENS & SHORTS
- ③ 4. ASSEMBLY TO BE 100% HI-POT TESTED PER TABLE 1
- AFTER FINAL ELECTRICAL TEST, LABEL EACH CABLE ASSEMBLY WITH 1 LABEL-ET
- CRITICALS ON CONNECTOR PRINTS TO BE CHECKED IN PROCESS.
- FINISHED ASSEMBLIES TO BE PACKAGED PER PACKAGING STANDARD CO-HD-WI-3040-M.
LOCK WASHERS AND NUTS TO BE SHIPPED UNASSEMBLED. GASKETS TO BE INSTALLED ON CABLE.
- CABLE STOCKED IN INCHES, 1 INCH = 25.4 MILLIMETERS
- CABLE LENGTHS LONGER THAN 500 MILLIMETERS ARE NOT SUPPORTED BY S.I. TEST DATA
- MINIMUM BEND RADIUS FOR RG179 = 10.2 [.40].
- FOR SING ENDED OR STRIPPED AND TINNED ASSEMBLIES: MAKE A DOUBLE ENDED
ASSEMBLY AT TWICE THE CABLE LENGTH AND TEST BEFORE CUTTING ASSEMBLY IN HALF.
- DIM "A", "B", AND "C" HAVE A MINIMUM VALUE OF 0.0mm & A MAXIMUM VALUE OF 9.9mm
- PRODUCTION OF STRIP AND TIN FOR CENTER DIELECTIC USE: A
- PRODUCTION OF STRIP AND TIN FOR SHIELD USE: D=A+B
- PRODUCTION OF STRIP AND TIN FOR JACKET USE: E=A+B+C
- CONNECTORS TO BE ORIENTED ACCORDING TO CO-RF-WI-3048-M.
- FOR STRIPPED AND TINNED OPTION, ONLY THE CENTER CONDUCTOR IS TINNED.
- AVAILABLE TO EXISTING CUSTOMERS ONLY

REVISION W

-72SP (STRAIGHT PLUG)

(USE DRAWING No. MCX7-P-C-XX-ST-CA3
FOR ASSEMBLY INSTRUCTIONS)



PLATING OPTIONS

1: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
3μ" MIN. GOLD REMAINING METAL PARTS
(END CONNECTOR P/N: MCX7-P-C-H-ST-CA3)

2: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: MCX7-P-C-HN-ST-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON MCX7-P-C-XX-ST-CA3
THAT APPLY MUST BE VERIFIED.

-72RP (RIGHT ANGLE PLUG)

(USE DRAWING No. MCX7-P-C-XX-RA-CA3
FOR ASSEMBLY INSTRUCTIONS)



PLATING OPTIONS


1: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
3μ" MIN. GOLD REMAINING METAL PARTS
(END CONNECTOR P/N: MCX7-P-C-H-RA-CA3)

2: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: MCX7-P-C-HN-RA-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON MCX7-P-C-XX-RA-CA3
THAT APPLY MUST BE VERIFIED.

-74SP (STRAIGHT PLUG)

(USE DRAWING No. BNC7T-P-C-XX-ST-CA3
FOR ASSEMBLY INSTRUCTIONS)

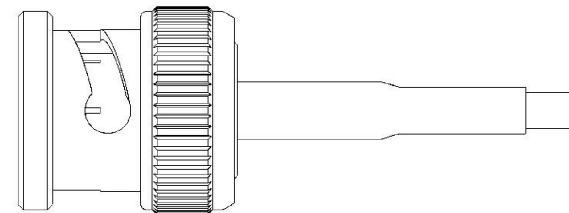


PLATING

3: 10μ" MIN. GOLD CENTER CONTACT
100μ" MIN. NICKEL OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: BNC7T-P-C-GN-ST-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON BNC7T-P-C-XX-ST-CA3
THAT APPLY MUST BE VERIFIED.

-77SP (STRAIGHT PLUG)

(USE DRAWING No. SMB7H-P-C-XX-ST-CA3
FOR ASSEMBLY INSTRUCTIONS)



PLATING OPTIONS


1: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
3μ" MIN. GOLD REMAINING METAL PARTS
(END CONNECTOR P/N: SMB7H-P-C-H-ST-CA3)

2: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: SMB7H-P-C-HN-ST-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON SMB7H-P-C-XX-ST-CA3
THAT APPLY MUST BE VERIFIED.

-77RP (RIGHT ANGLE PLUG)

(USE DRAWING No. SMB7H-P-C-XX-RA-CA3
FOR ASSEMBLY INSTRUCTIONS)



PLATING OPTIONS


1: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
3μ" MIN. GOLD REMAINING METAL PARTS
(END CONNECTOR P/N: SMB7H-P-C-H-RA-CA3)

2: 30μ" MIN. GOLD CENTER CONTACT
3μ" MIN. GOLD OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: SMB7H-P-C-HN-RA-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON SMB7H-P-C-XX-RA-CA3
THAT APPLY MUST BE VERIFIED.

-74BJ (STRAIGHT BULKHEAD JACK)

(USE DRAWING No. BNC7T-J-C-XX-ST-BH3
FOR ASSEMBLY INSTRUCTIONS)

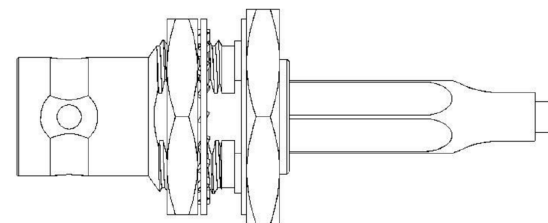

PLATING OPTIONS

2: 30μ" MIN. GOLD CENTER CONTACT
100μ" MIN. NICKEL OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: BNC7T-J-C-HN-ST-BH3)

3: 10μ" MIN. GOLD CENTER CONTACT
100μ" MIN. NICKEL OUTER CONTACT
100μ" MIN. NICKEL REMAINING METAL PARTS
(END CONNECTOR P/N: BNC7T-J-C-GN-ST-BH3)

NOTE: ALL CRITICAL DIMENSIONS ON BNC7T-J-C-XX-ST-BH3
THAT APPLY MUST BE VERIFIED.

FIG. 3
RF179-72SPX-102148-XXXX SHOWN


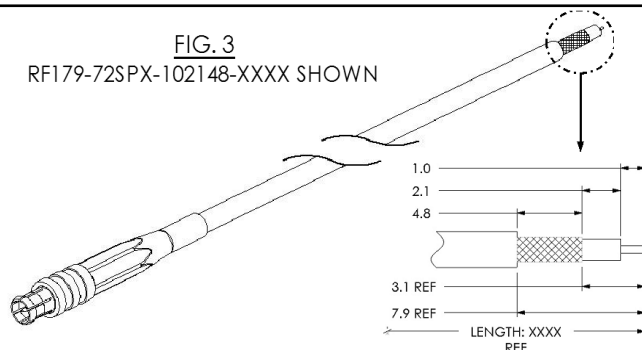


FIG. 4
(SEE NOTE 16)

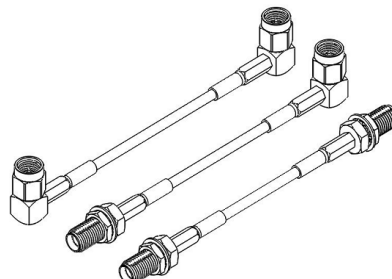

F:\DWG\MISC\MKTG\RF179-XXXX-XXXX-XXXX-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:

RF179 CABLE ASSEMBLY

DWG. NO.

RF179-XXXXX-XXXXXX-XXXX


BY: B. RAY

1-30-2007

SHEET 2 OF 4

-D4SP

(DIE CAST STRAIGHT PLUG)

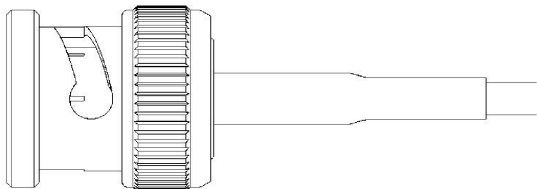(USE DRAWING No. BNC7T-P-C-XX-ST-CA3D
FOR ASSEMBLY INSTRUCTIONS)


PLATING

3: 10μ" MIN. GOLD CENTER CONTACT
 100μ" MIN. NICKEL OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: BNC7T-P-C-GN-ST-CA3D)

NOTE: ALL CRITICAL DIMENSIONS ON BNC7T-P-C-XX-ST-CA3D
 THAT APPLY MUST BE VERIFIED.

-78SP

(STRAIGHT PLUG)

(USE DRAWING No. DIN7A-PP-C-XX-ST-CA3
FOR ASSEMBLY INSTRUCTIONS)

PLATING

4: 10μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: DIN7A-PP-C-GF-ST-CA3)

5: 10μ" MIN. GOLD CENTER CONTACT
 10μ" MIN. GOLD OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: DIN7A-PP-C-GG-ST-CA3)


6: 30μ" MIN. GOLD CENTER CONTACT
 30μ" MIN. GOLD OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: DIN7A-PP-C-HH-ST-CA3)

8: 30μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: DIN7A-PP-C-HF-ST-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON DIN7A-PP-C-XX-ST-CA3
 THAT APPLY MUST BE VERIFIED.

-79SP

(STRAIGHT PLUG)

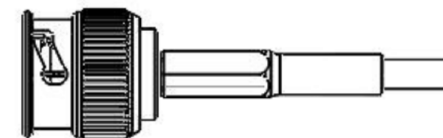(USE DRAWING No. MBNC7-P-C-XX-ST-CA3
FOR ASSEMBLY INSTRUCTIONS)**AVAILABLE TO EXISTING CUSTOMERS ONLY**

PLATING


2: 30μ" MIN. GOLD CENTER CONTACT
 100μ" MIN. NICKEL OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: MBNC7-P-C-HN-ST-CA3)

3: 10μ" MIN. GOLD CENTER CONTACT
 100μ" MIN. NICKEL OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: MBNC7-P-C-GN-ST-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON MBNC7-P-C-XX-ST-CA3
 THAT APPLY MUST BE VERIFIED.

-79RP

(RIGHT ANGLE)

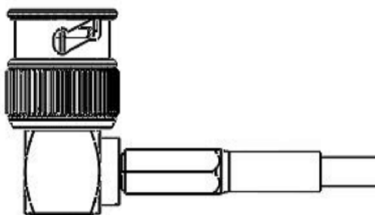(USE DRAWING No. MBNC7-P-C-XX-RA-CA3
FOR ASSEMBLY INSTRUCTIONS)**AVAILABLE TO EXISTING CUSTOMERS ONLY**

PLATING

2: 30μ" MIN. GOLD CENTER CONTACT
 100μ" MIN. NICKEL OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: MBNC7-P-C-HN-RA-CA3)

3: 10μ" MIN. GOLD CENTER CONTACT
 100μ" MIN. NICKEL OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: MBNC7-P-C-GN-RA-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON MBNC7-P-C-XX-RA-CA3
 THAT APPLY MUST BE VERIFIED.

-73SP

(STRAIGHT PLUG)

(USE DRAWING No. MMCX7-P-C-XX-ST-CA3
FOR ASSEMBLY INSTRUCTIONS)

PLATING

T: 30μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 3μ" MIN. GOLD REMAINING METAL PARTS
 (END CONNECTOR P/N: MMCX7-P-C-HF-ST-CA3)

4: 10μ" MIN. GOLD CENTER CONTACT
 3μ" MIN. GOLD OUTER CONTACT
 100μ" MIN. NICKEL REMAINING METAL PARTS
 (END CONNECTOR P/N: MMCX7-P-C-GF-ST-CA3)

NOTE: ALL CRITICAL DIMENSIONS ON MMCX7-P-C-XX-ST-CA3
 THAT APPLY MUST BE VERIFIED.

F:\DWG\MISC\MKTG\RF179-XXXXX-XXXXXX-XXXX-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
 CONFIDENTIAL AND PROPRIETARY TO
 SAMTEC, INC. AND SHALL NOT BE REPRODUCED
 OR TRANSFERRED TO OTHER DOCUMENTS OR
 DISCLOSED TO OTHERS OR USED FOR ANY
 PURPOSE OTHER THAN THAT WHICH IT WAS
 OBTAINED WITHOUT THE EXPRESSED WRITTEN
 CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1

520 PARK EAST BLVD, NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

RF179 CABLE ASSEMBLY



DWG. NO.

RF179-XXXXX-XXXXXX-XXXX

BY: B. RAY

1-30-2007

SHEET 3 OF 4

REVISION W	* -7GSJ (STRAIGHT JACK)	-7VSJ (STRAIGHT JACK)	-7VRP (RIGHT ANGLE PLUG)
	(USE DRAWING No. GRF7-J-C-XX-ST-CA3 FOR ASSEMBLY INSTRUCTIONS)  PLATING T: 30μ" MIN. GOLD CENTER CONTACT 3μ" MIN. GOLD OUTER CONTACT 3μ" MIN. GOLD REMAINING METAL PARTS (END CONNECTOR P/N: GRF7-J-C-HF-ST-CA3) 4: 10μ" MIN. GOLD CENTER CONTACT 3μ" MIN. GOLD OUTER CONTACT 100μ" MIN. NICKEL REMAINING METAL PARTS (END CONNECTOR P/N: GRF7-J-C-GF-ST-CA3) NOTE: ALL CRITICAL DIMENSIONS ON GRF7-J-C-XX-ST-CA3 THAT APPLY MUST BE VERIFIED.	(USE DRAWING No. GRF7V-J-C-XX-ST-CA3 FOR ASSEMBLY INSTRUCTIONS)  PLATING T: 30μ" MIN. GOLD CENTER CONTACT 3μ" MIN. GOLD OUTER CONTACT 3μ" MIN. GOLD REMAINING METAL PARTS (END CONNECTOR P/N: GRF7V-J-C-HF-ST-CA3) 4: 10μ" MIN. GOLD CENTER CONTACT 3μ" MIN. GOLD OUTER CONTACT 100μ" MIN. NICKEL REMAINING METAL PARTS (END CONNECTOR P/N: GRF7V-J-C-GF-ST-CA3) NOTE: ALL CRITICAL DIMENSIONS ON GRF7V-J-C-XX-ST-CA3 THAT APPLY MUST BE VERIFIED.	(USE DRAWING No. GRF7V-P-C-XX-RA-CA3 FOR ASSEMBLY INSTRUCTIONS)  PLATING T: 30μ" MIN. GOLD CENTER CONTACT 3μ" MIN. GOLD OUTER CONTACT 3μ" MIN. GOLD REMAINING METAL PARTS (END CONNECTOR P/N: GRF7V-P-C-HF-RA-CA3) 4: 10μ" MIN. GOLD CENTER CONTACT 3μ" MIN. GOLD OUTER CONTACT 100μ" MIN. NICKEL REMAINING METAL PARTS (END CONNECTOR P/N: GRF7V-P-C-GF-RA-CA3) NOTE: ALL CRITICAL DIMENSIONS ON GRF7V-P-C-XX-RA-CA3 THAT APPLY MUST BE VERIFIED.
PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. DO NOT SCALE DRAWING SHEET SCALE: 1:1		 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322 DESCRIPTION: RF179 CABLE ASSEMBLY DWG. NO. RF179-XXXXX-XXXXXX-XXXX BY: B. RAY 1-30-2007 SHEET 4 OF 4	