

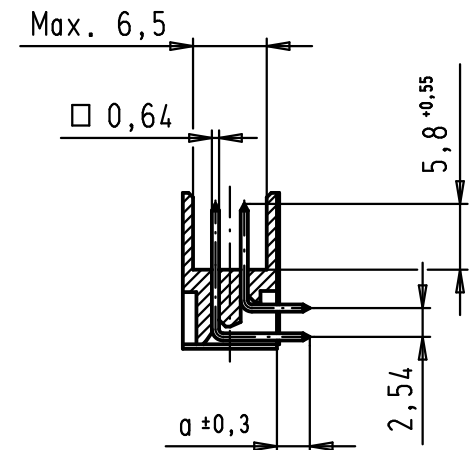
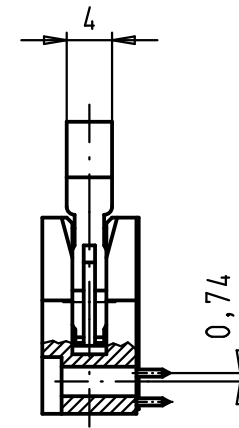
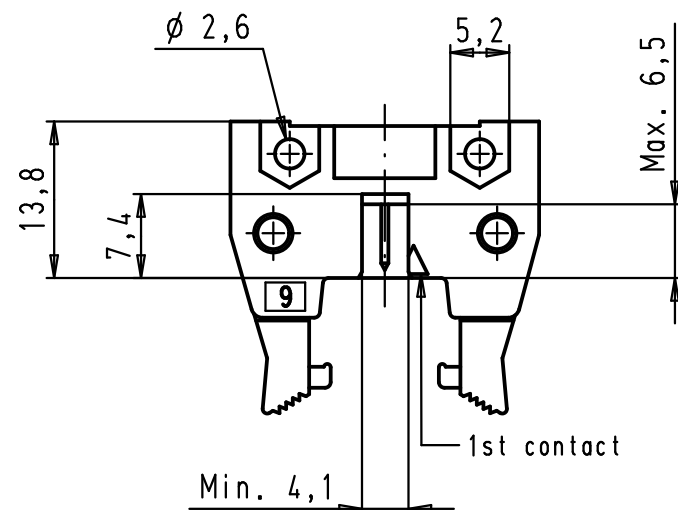
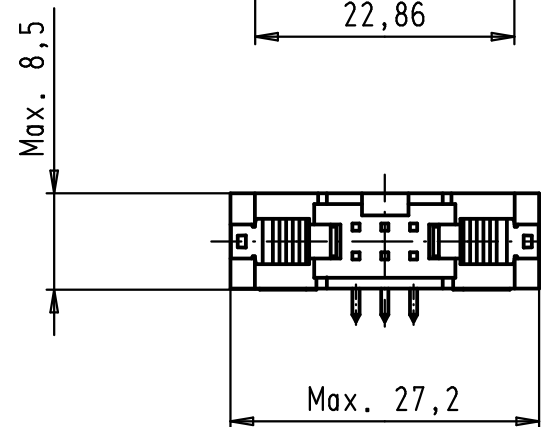


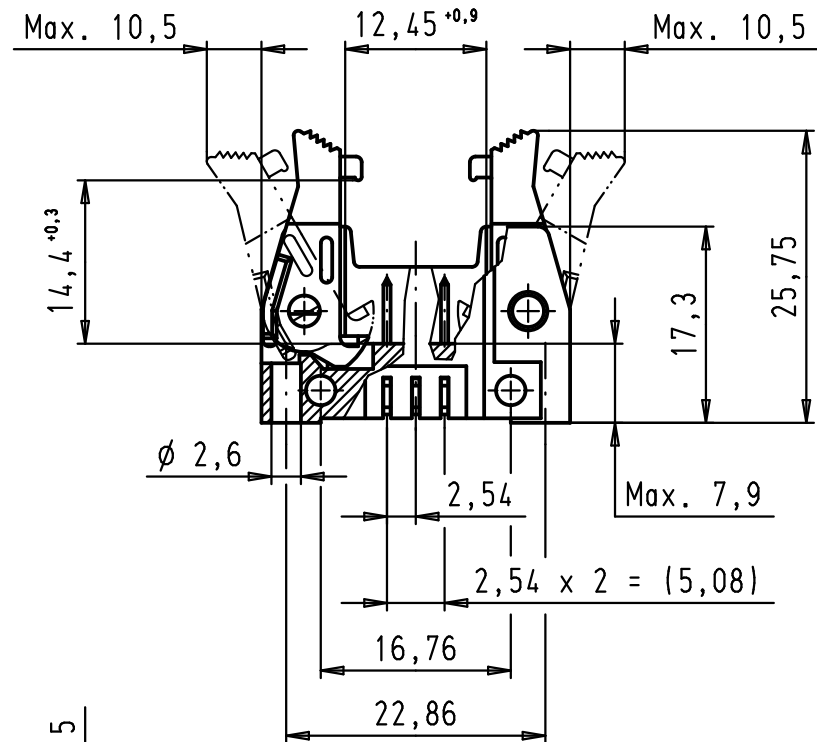

PCB layout, component side

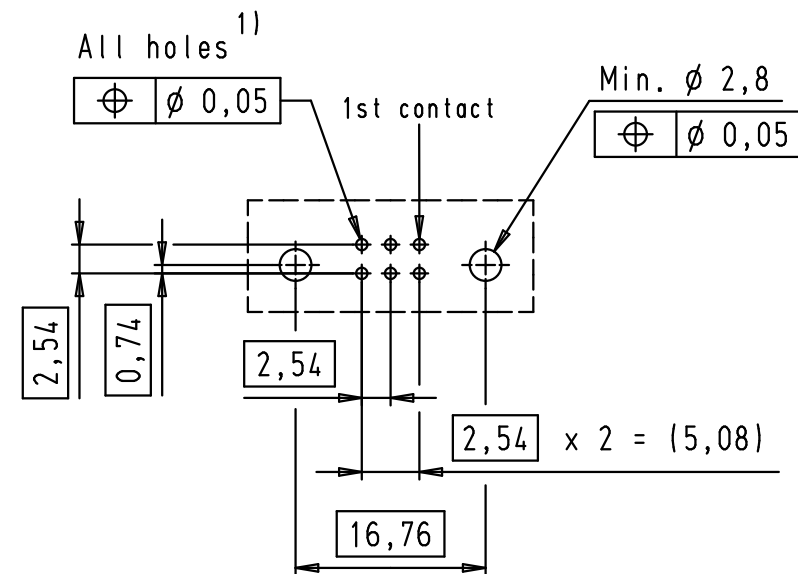

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

09 18 506 7901	3	4,5
09 18 506 6901	2	4,5
09 18 506 5901	0,76 $\mu\text{m Au}$	4,5
09 18 506 7903	3	2,9
09 18 506 6903	2	2,9
09 18 506 5903	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

34890	31/01/08	PK		Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard 06 poles Angled pins Long locking levers	Maßstab/ Scale 1,5:1
29759	29/03/02	CV	Detail.	01/12/99	JB			
29753	11/03/02	JB	Insp.					
29739	03/12/01	JB	Stand.					
27931	15/06/00	JB	HARTING EURL F-95972 Paris				TB 09 18 506 X90X	Blatt/ Page 2 / 2
26554	01/12/99	JB						
Mod.	Det.	Name					Sub.	