

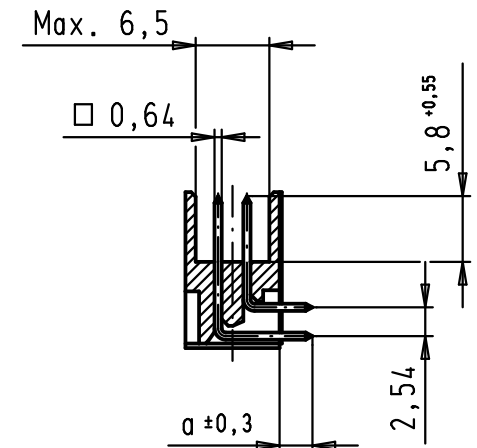
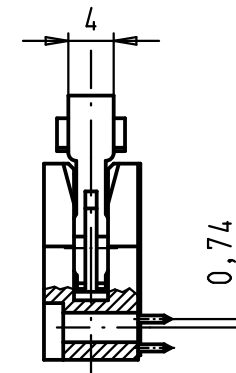


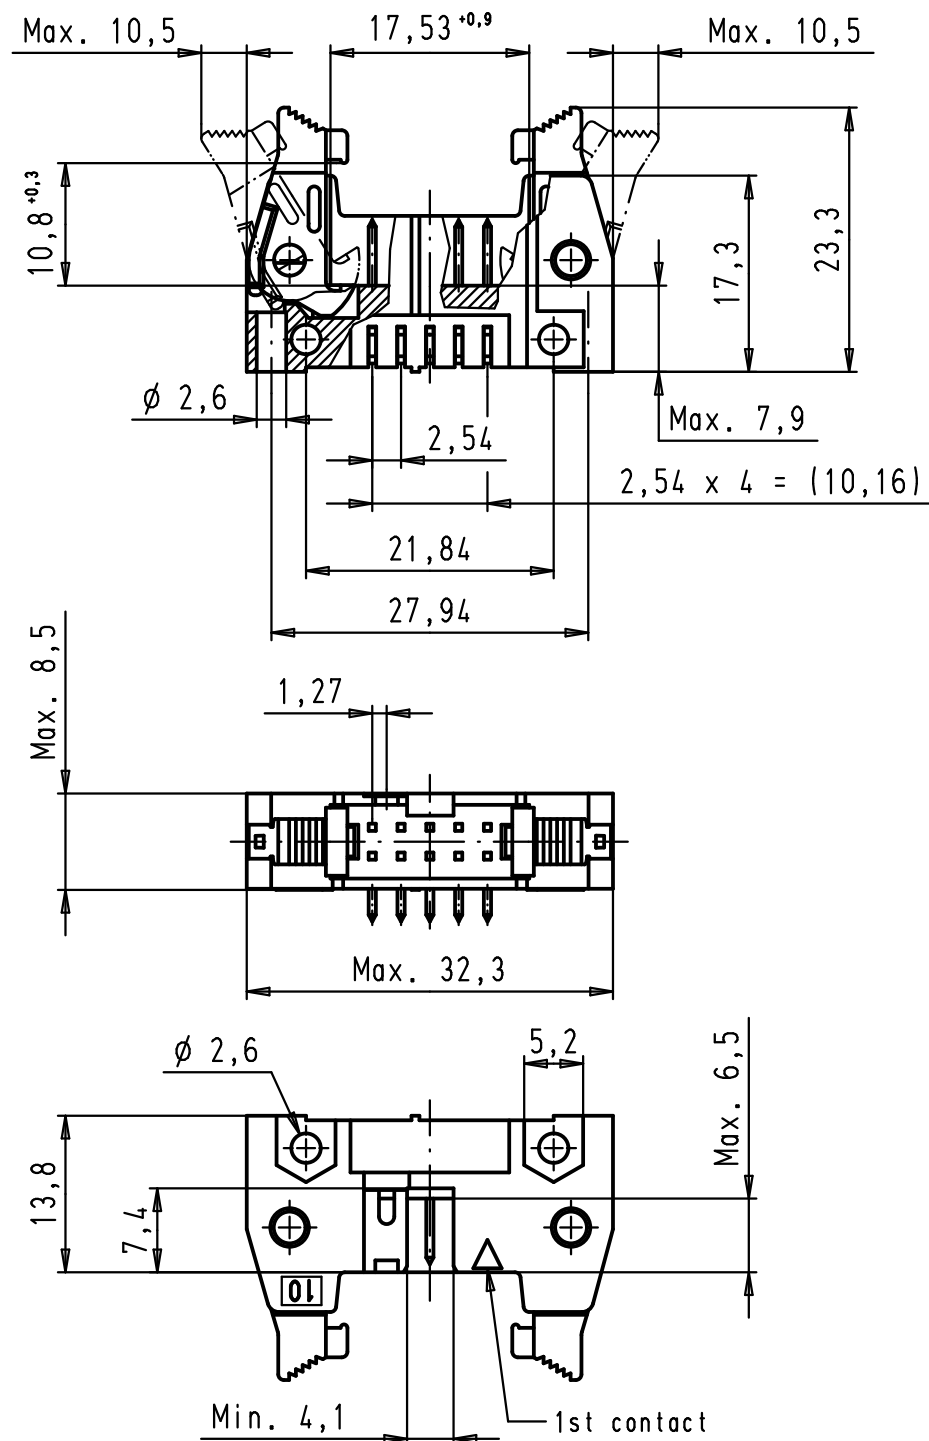


PCB layout, component side

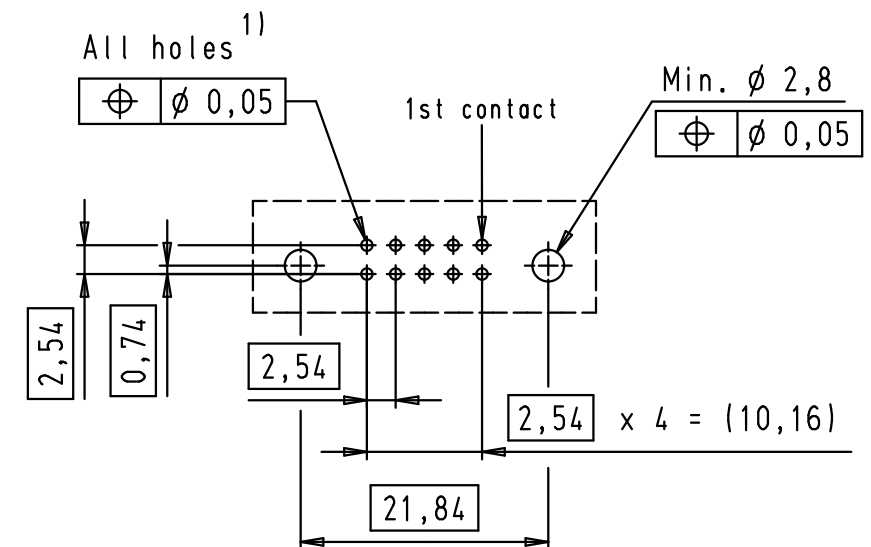

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

09 18 510 7911 001	3	4,5	Black insulator
09 18 510 6911 001	2	4,5	Black insulator
09 18 510 5911 001	0,76µm Au	4,5	Black insulator
09 18 510 7913 001	3	2,9	Black insulator
09 18 510 6913 001	2	2,9	Black insulator
09 18 510 5913 001	0,76µm Au	2,9	Black insulator
09 18 510 7911	3	4,5	Standard insulator color
09 18 510 6911	2	4,5	Standard insulator color
09 18 510 5911	0,76µm Au	4,5	Standard insulator color
09 18 510 7913	3	2,9	Standard insulator color
09 18 510 6913	2	2,9	Standard insulator color
09 18 510 5913	0,76µm Au	2,9	Standard insulator color
Part number	Performance level	a	Index designation

36255	04/02/11	SC		Dat.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard	Maßstab/ Scale
34890	01/02/08	PK	Detail.	01/12/99	JB		10 poles	1,5:1
29753	11/03/02	JB	Insp.	09/02/11	JB		Angled pins	
29739	03/12/01	JB	Stand.				Short locking levers	
27931	15/06/00	JB					TB 09 18 510 X91X	Blatt/ Page
26554								2/2
Mod.	Dat.	Name						

HARTING EURL
 F-95972 Paris



Sub.