
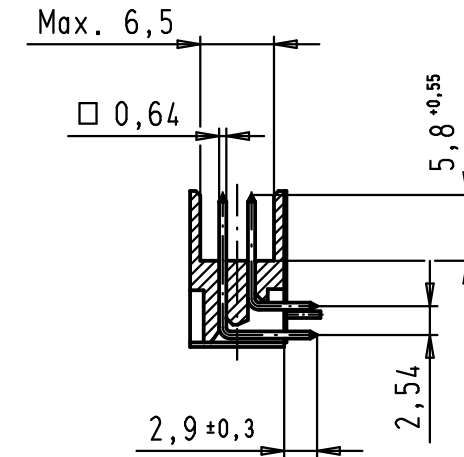
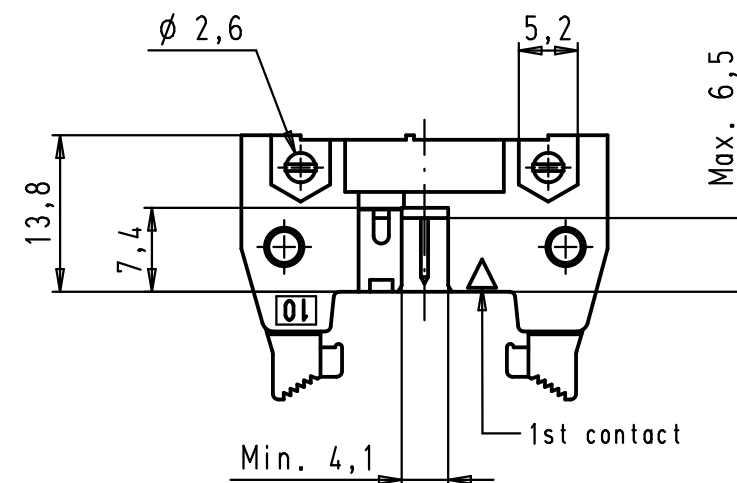




Technical drawing of a contact plate. The drawing shows a rectangular plate with a central contact area. The overall width is 21,84. The distance from the left edge to the center of the contact area is 2,54. The distance from the center of the contact area to the right edge is 2,54. The contact area is defined by a dashed rectangle with a width of 10,16 (calculated as 2,54 x 4). The contact area contains 16 contact points arranged in a 4x4 grid. The distance between the contact points is 0,74. The diameter of the contact points is $\phi 0,05$. The diameter of the contact area is $\phi 2,8^{+0,1}$. The drawing also shows a dimension of 2,54 for the distance from the left edge to the center of the contact area.

09 18 510 7963	3
09 18 510 6963	2
09 18 510 5963	0,76 $\mu\text{m Au}$
Part number	Performance level

				Dat.	Name		SEK 18 Male Connector Standard 10 poles Angled pins, board locks and short locking levers	Maßstab/ Scale 1,5:1
			Detail.	25/04/02	CV			
			Insp.					
			Stand.					
34890	13/06/08	PK	HARTING EURL F-95972 Paris				TB 09 18 510 X963	Blatt/ Page 1 / 1
29778	25/04/02	CV						
Mod.	Dat.	Name						
						All Dim. in mm Orig. Size DIN A 3		
						Sub.		