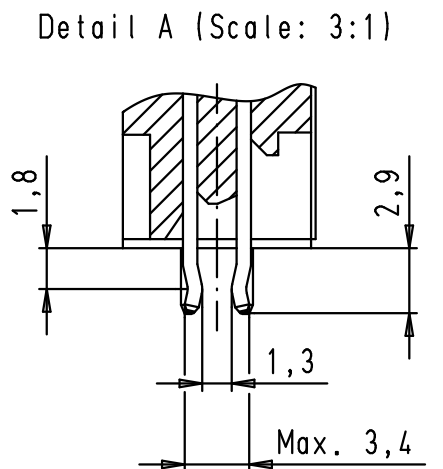
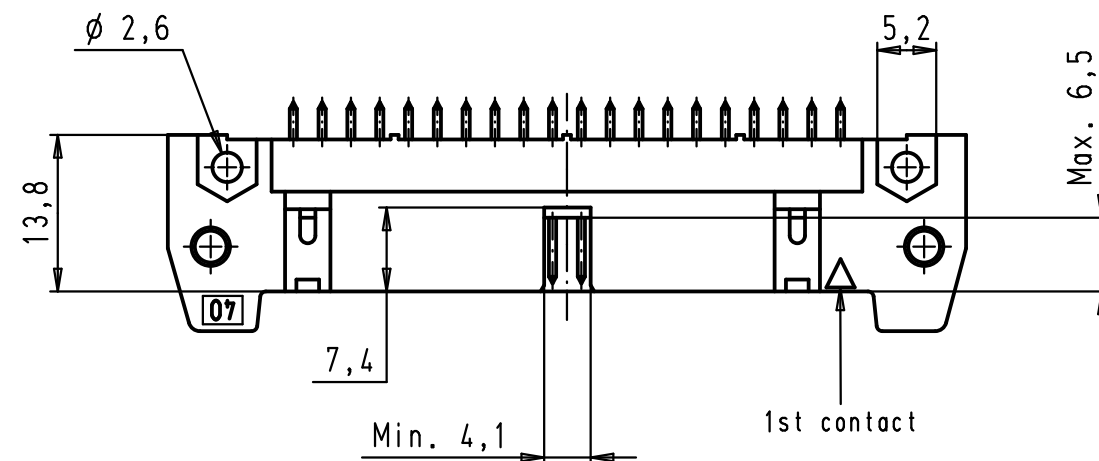


Solder pins for PCB connections
 $\varnothing 1 \pm 0,1$ according to IEC 60 603-13

PCB thickness from 1,50 to 1,94 mm after Cu + Sn plating
with non remelted plated through holes $\varnothing$ 0,85 to $\varnothing$ 1,05 mm
Maximum insertion force = 125 N
Minimum retention force = 3 N

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard	Maßstab/ Scale 1,5:1
			Detail.	24/01/08	PK		40 poles	
			Insp.				Straight kinked pins	
			Stand.				Without locking levers	
34800	24/01/08	PK	HARTING EURL F-95972 Paris				TB 09 18 540 X02X	Blatt/ Page 1 / 2
Mod.	Dat.	Name					Sub.	