

# FMW-2156

Schottky Barrier Rectifier

Mar. 2008

## General Description

FMW-2106 is a Schottky Barrier Diode, and has achieved low leakage current and low VF by selecting the best barrier metal.

## Applications


- DC-DC converters
- AC adapter
- High frequency rectification circuit

## Features

- Super-high speed & low noise switching.
- Low forward voltage drop.

## Package

TO220F(3Pin)

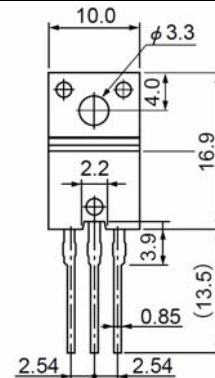


## Key Specifications


| Symbol      | Unit | Rating | Conditions |
|-------------|------|--------|------------|
| $V_{RM}$    | V    | 60     |            |
| $V_F$       | V    | 0.70   | $I_F=7.5A$ |
| $I_{F(AV)}$ | A    | 15     |            |

## Typical Characteristics

FMW-2156 IF-VF Characteristics

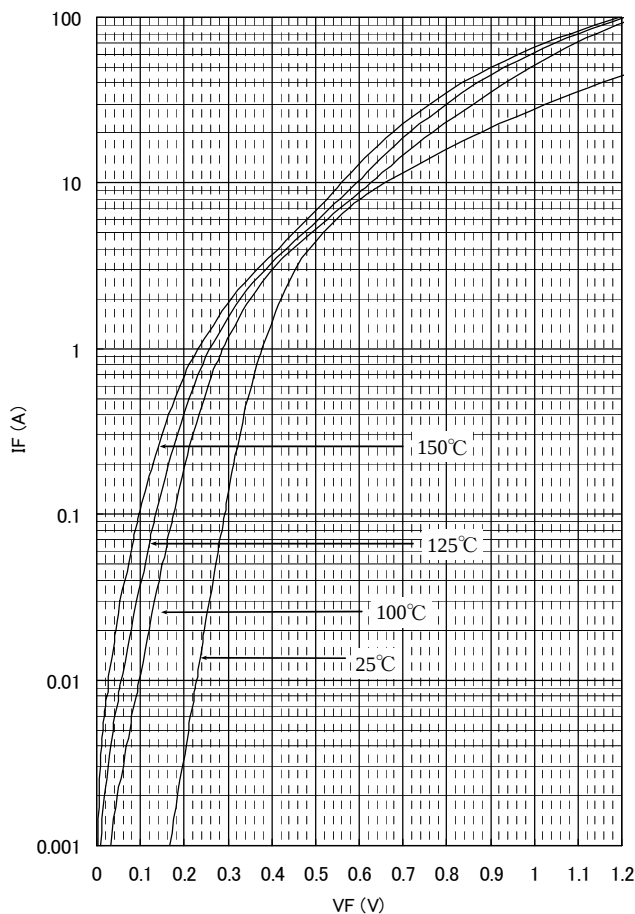

FMW-2156 VR-IR Characteristics

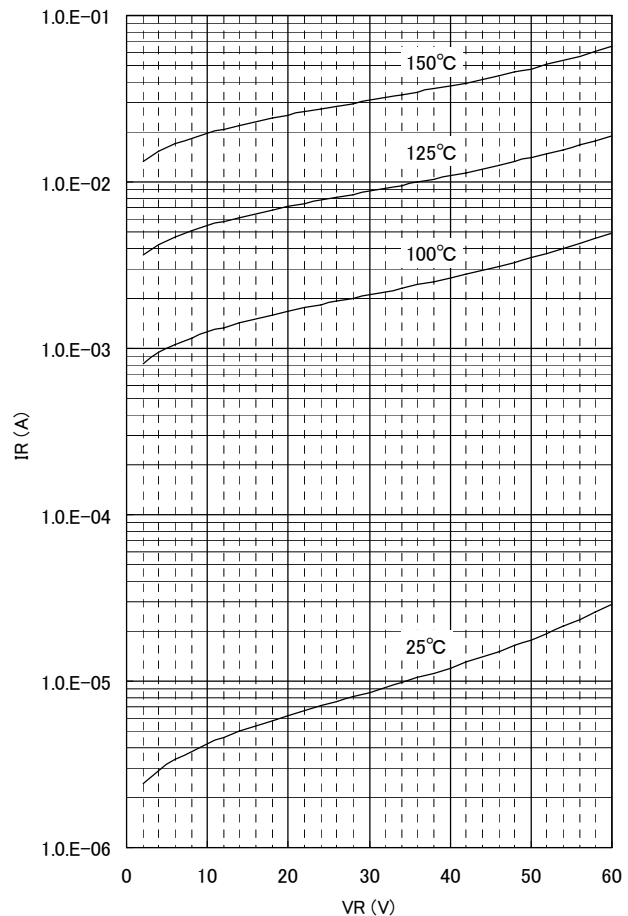

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

# FMW-2156

Mar. 2008

Schottky Barrier Rectifier

## ★ Absolute maximum ratings

| No. | Parameter                      | Symbol      | Unit   | Rating      | Conditions              |
|-----|--------------------------------|-------------|--------|-------------|-------------------------|
| 1   | Transient Peak Reverse Voltage | $V_{RSM}$   | V      | 60          |                         |
| 2   | Peak Reverse Voltage           | $V_{RM}$    | V      | 60          |                         |
| 3   | Average Forward Current        | $I_{F(AV)}$ | A      | 15          |                         |
| 4   | Peak Surge Forward Current     | $I_{FSM}$   | A      | 100         | Half sinewave, one shot |
| 5   | $I^2t$ Limiting Value          | $I^2t$      | $A^2s$ | 50          | $1msec < t < 10msec$    |
| 6   | Junction Temperature           | $T_j$       | °C     | -40 to +150 |                         |
| 7   | Storage Temperature            | $T_{stg}$   | °C     | -40 to +150 |                         |

No.1,2,4&amp;5 show ratings per one chip.

## ★ Electrical characteristics( $T_a=25^{\circ}C$ , unless otherwise specified)

| No. | Parameter                                      | Symbol        | Unit  | Rating    | Conditions                        |
|-----|------------------------------------------------|---------------|-------|-----------|-----------------------------------|
| 1   | Forward Voltage Drop                           | $V_F$         | V     | 0.70 max. | $I_F=7.5A$                        |
| 2   | Reverse Leakage Current                        | $I_R$         | mA    | 5.0 max.  | $V_R=V_{RM}$                      |
| 3   | Reverse Leakage Current Under High Temperature | $H \cdot I_R$ | mA    | 175 max.  | $V_R=V_{RM}$ , $T_j=150^{\circ}C$ |
| 4   | Thermal Resistance                             | $R_{th(j-c)}$ | °C /W | 4.0 max.  | Between Junction and case         |

No.1,2,&amp;3 show characteristics per one chip.

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.


# FMW-2156

Schottky Barrier Rectifier


Mar. 2008

## ★ Characteristics

Forward Power Dissipation

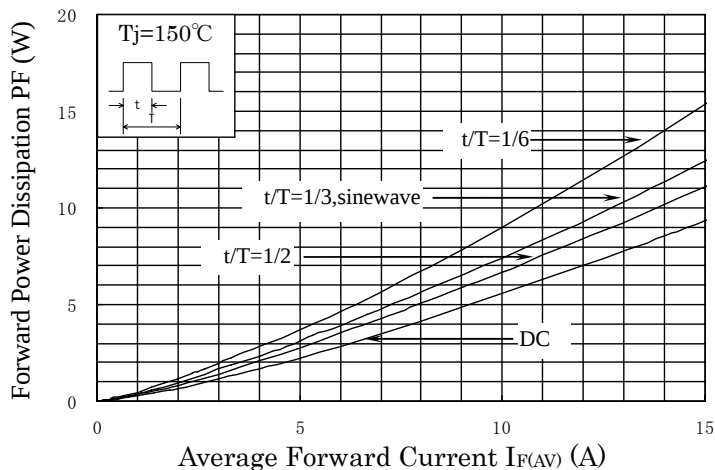


Reverse Power Dissipation

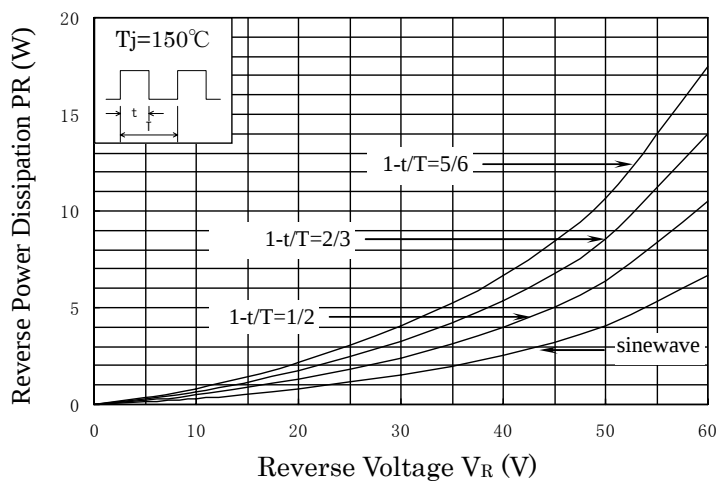

Current Derating

$V_R=60\text{V}$

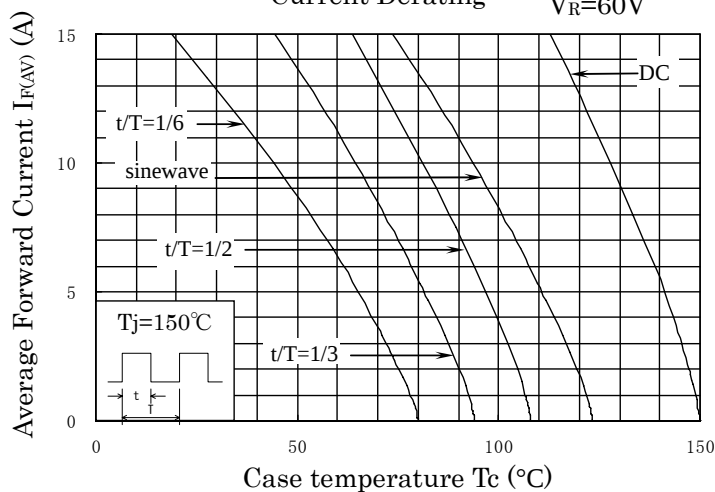


# FMW-2156

Schottky Barrier Rectifier

Mar. 2008

## ★ Outline drawings, mm

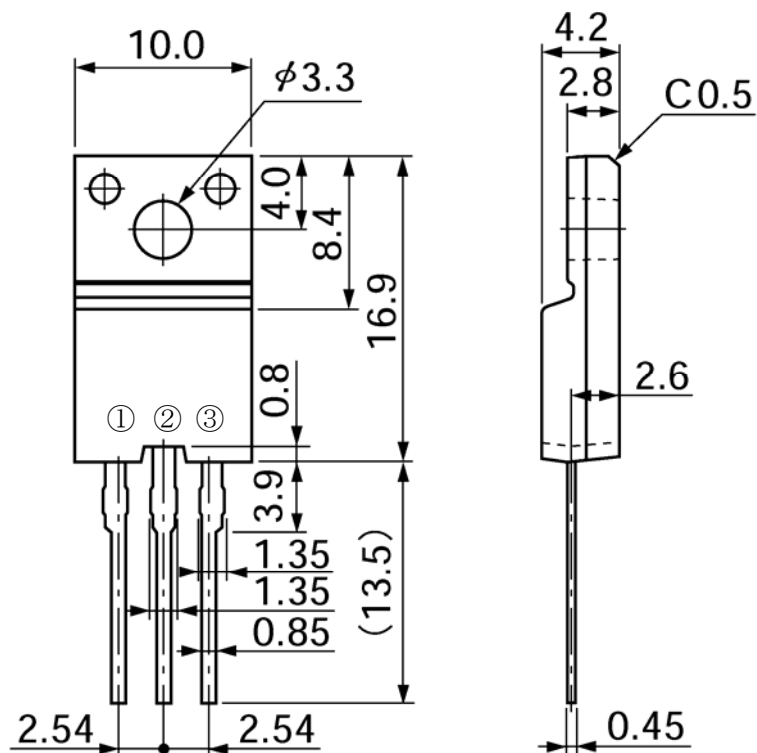

## ★ Connection Diagram

