


| PART NUMBER | ITEM ① BODY | ITEM ② SLIDER | ITEM ③ CONTACT | ITEM ④ INSULATOR TEFLON | ITEM ⑤ RETENTION SPRINGS BERYLLIUM COPPER UNPLATED | ITEM ⑥ COUPLING NUT BERYLLIUM COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN |
|--------------|---|--|--|-------------------------------|---|--|
| 142-1901-821 | BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN | BRASS NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN | BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN | | | |

| | | | | | | | | | |
|----------------------|---------|-----------|-------------|--|--|--|---------|-----------|--|
| DRAWING NO. | | | | | | | | | |
| C - 142-1901-821/830 | | | | | | | | | |
| 0 | | REVISIONS | | | | | | | |
| ENGINEERING RELEASE | | | | | | | | | |
| 1 | 5-18-04 | | T A K | | | | 4-29-04 | ECN 49278 | |

INSTRUCTIONS FOR USE:

- WITH SLIDER IN THE ENGAGED POSITION THE CONNECTOR FUNCTIONS LIKE A STANDARD SMA CONNECTOR.
TIGHTEN (SPIN) THE KNURLED NUT BY HAND TO OBTAIN FULL MATING ENGAGEMENT OR DISENGAGEMENT.
- QUICK CONNECT FUNCTION:
 - WITH SLIDER IN THE DISENGAGED POSITION, SLIDE THE CABLED CONNECTOR ONTO THE JACK RECEPTACLE, OVER THE JACK THREADS BY PUSHING ON THE BACK OF THE KNURLED NUT.
 - ENGAGE THE SLIDER WHILE MAINTAINING LIGHT FORWARD PRESSURE ON THE NUT. THIS ACTION IS DONE BY SLIPPING YOUR FINGERS FROM THE NUT TO THE SLIDER IN ONE MOTION.
 - ONCE THE SLIDER IS ENGAGED THE KNURLED NUT CAN BE TURNED 1 TURN OR LESS TO OBTAIN FULL MATING ENGAGEMENT PERFORMANCE.
 - DISENGAGE THE CONNECTOR BY FIRST LOOSENING THE COUPLING NUT A PARTIAL TURN.
THEN DISENGAGE THE SLIDER AND REMOVE THE CONNECTOR.

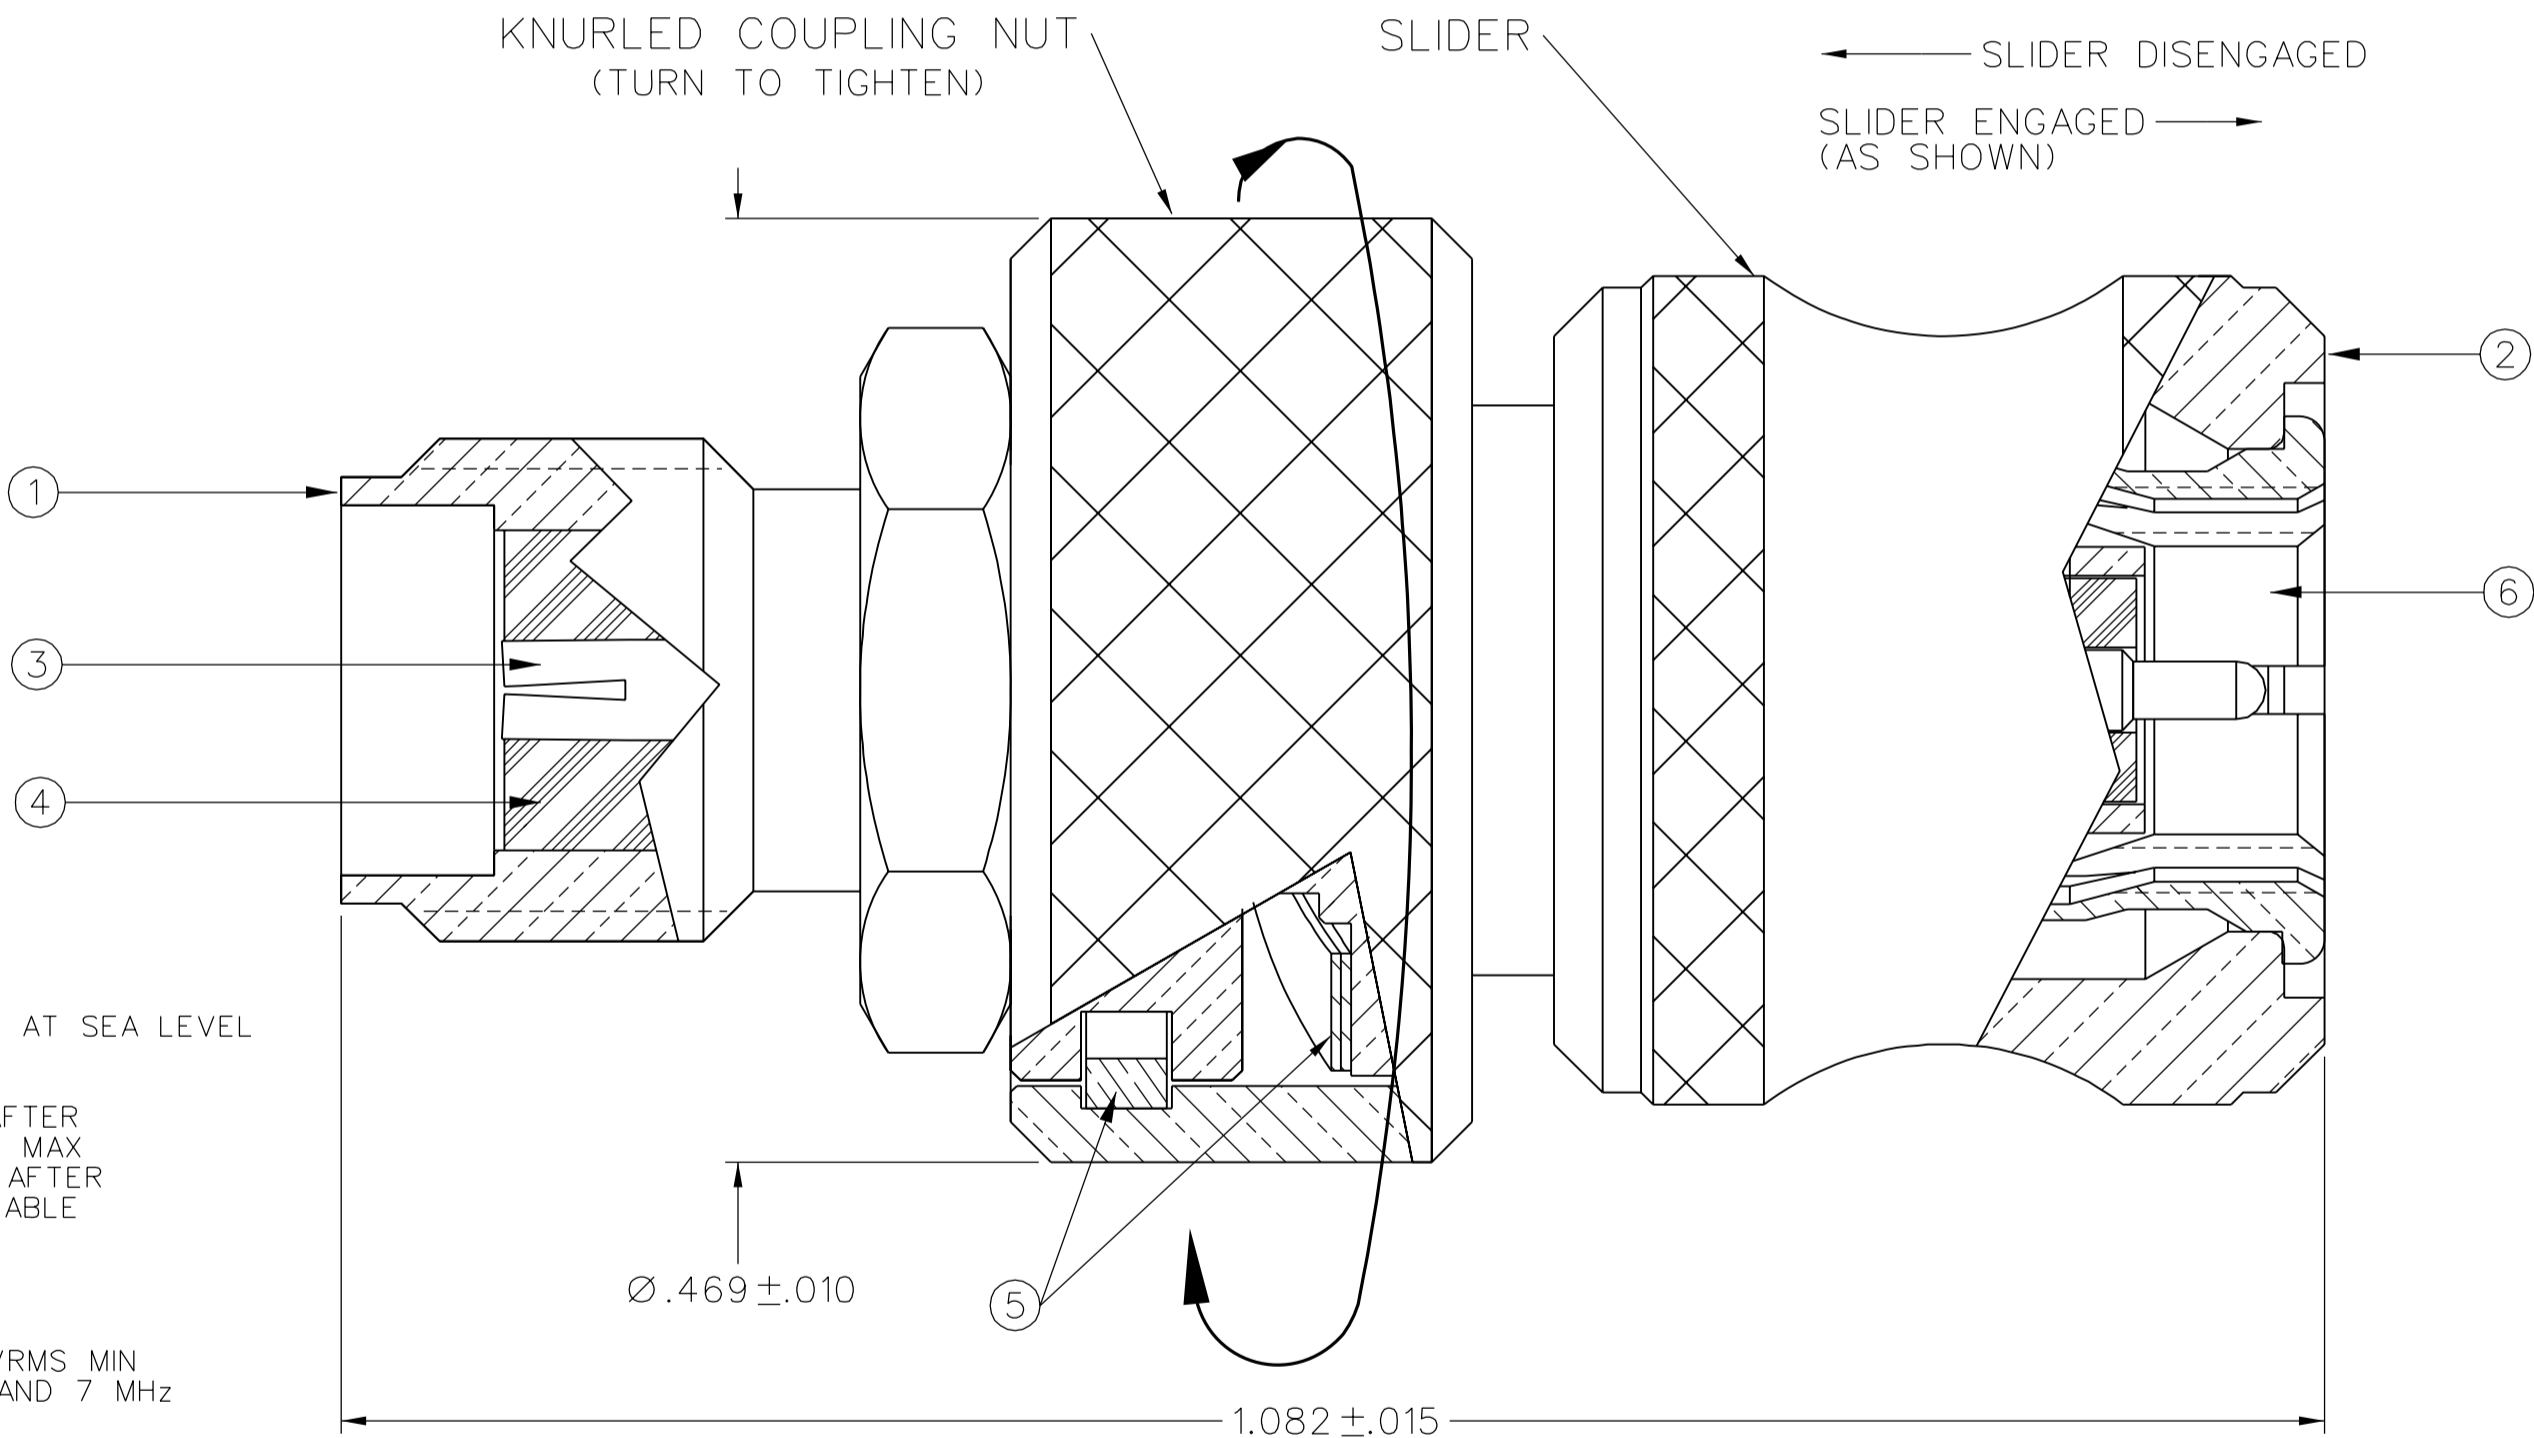

NOTES:

- SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-18 GHZ
VSWR: 1.05+.005 F MAX (F IN GHZ)
WORKING VOLTAGE: 500 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHM MIN
CONTACT RESISTANCE:
 CENTER CONTACT - INITIAL 4.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 6.0 MILLIOHM MAX
 OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
 BRAID TO BODY - NOT APPLICABLE
CORONA LEVEL: 375 VOLTS MIN AT 70,000 FEET
INSERTION LOSS: .06√F MAX (F IN GHZ) AT 6 GHZ
RF LEAKAGE: -90 DB MIN AT 2.5 GHZ
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 1000 VRMS MIN AT 4 AND 7 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX
MATING TORQUE: 7-10 INCH POUNDS
COUPLING PROOF TORQUE: 15 INCH-POUNDS MIN
COUPLING NUT RETENTION: 60 LBS MIN
CONTACT RETENTION: 6 LBS MIN AXIAL FORCE
CABLE ACCEPTABILITY: NOT APPLICABLE
CABLE HEX CRIMP SIZE: NOT APPLICABLE
CABLE RETENTION: NOT APPLICABLE
DURABILITY: 1000 CYCLES MIN

ENVIRONMENTAL:


(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-A-55339)
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION I
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

| | | | | | |
|--------------------------------------|----|-------------------------|-----------------|--|-------------------------------------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | DRAWN BY T.A.Kari | DATE 9-16-03 |  Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256 | |
| DECIMALS .XX | mm | CHECKED BY | DATE | | |
| .XXX ±.003 | | APPROVED BY T.A.Kari | DATE 5-18-04 | TITLE ADAPTER, SMA, IN SERIES JACK TO QUICK CONNECT PLUG | |
| MATL | | RELEASE DATE | 5-18-04 | SHEET 2 OF 2 | DRAWING NO. C - 142-1901-821/830 |
| FINISH | | U/M INCH | SCALE 10:1 | | |