


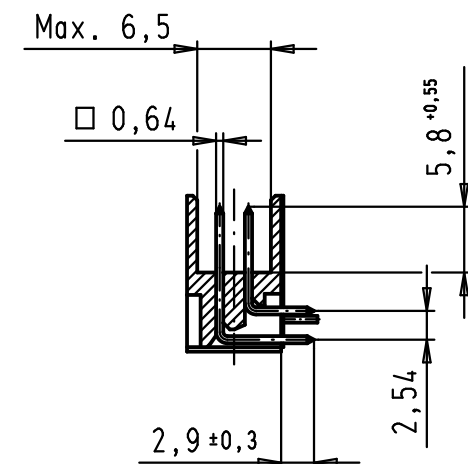
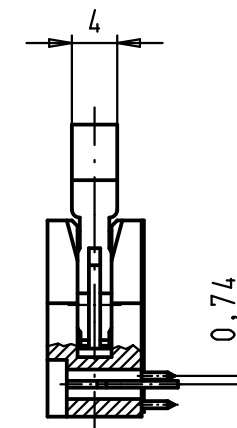
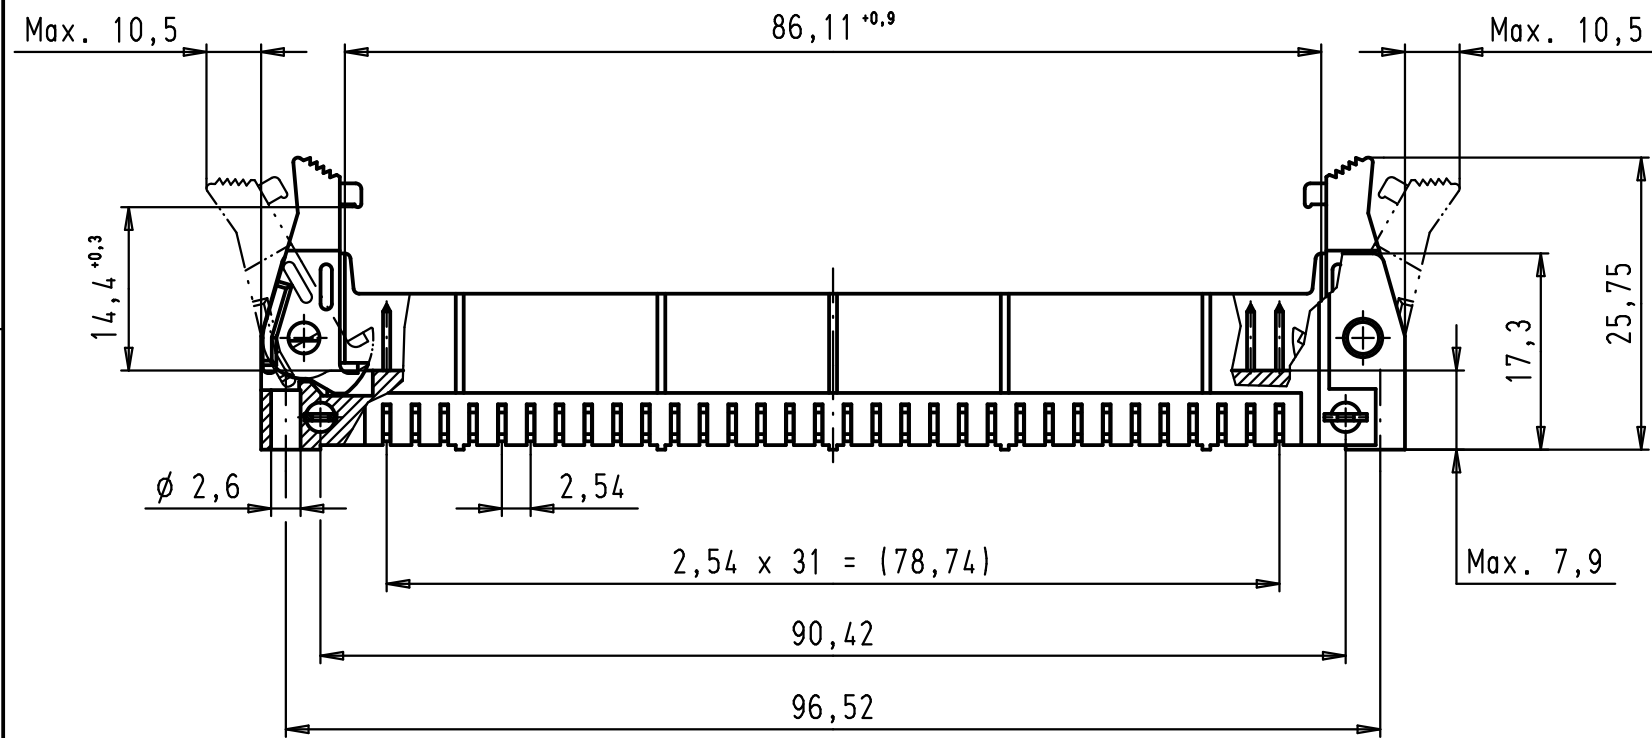


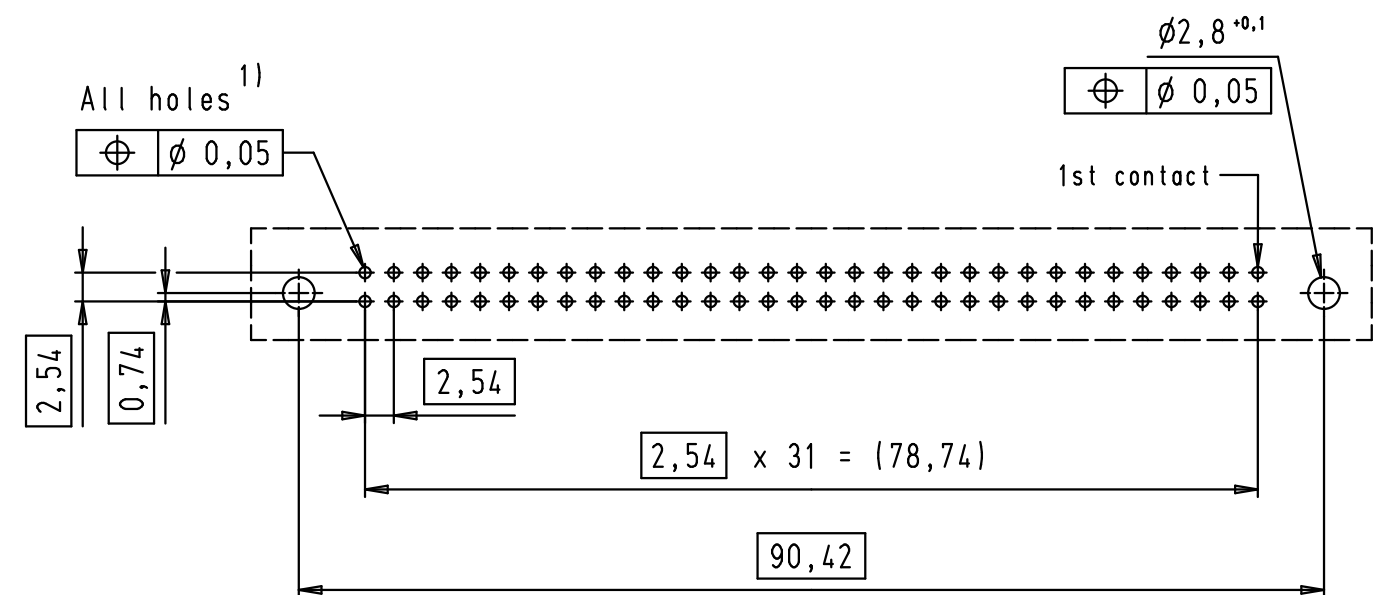


PCB layout, component side, thickness 1,6 mm

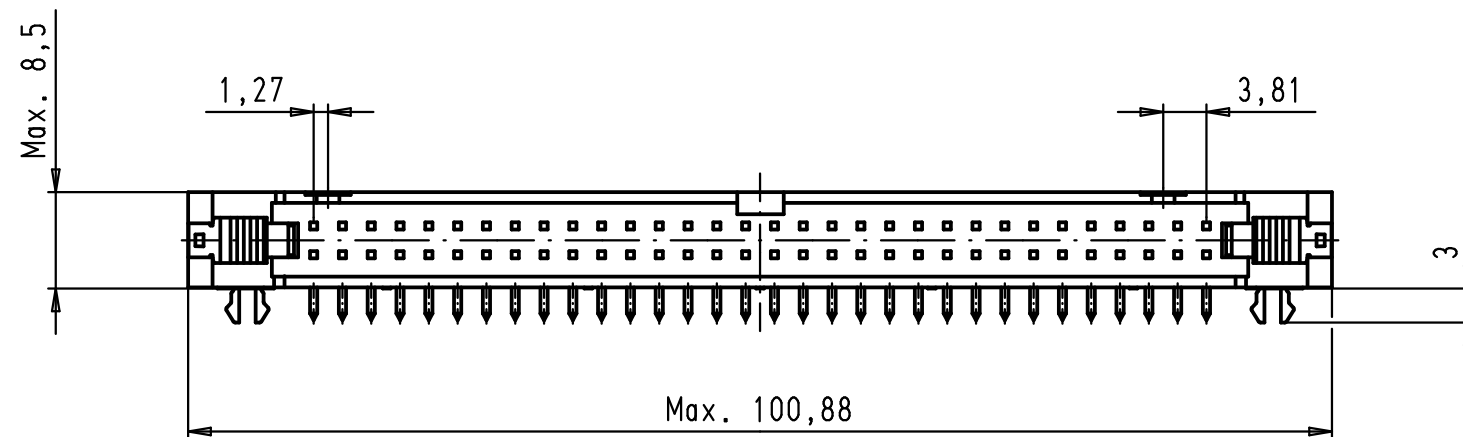

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

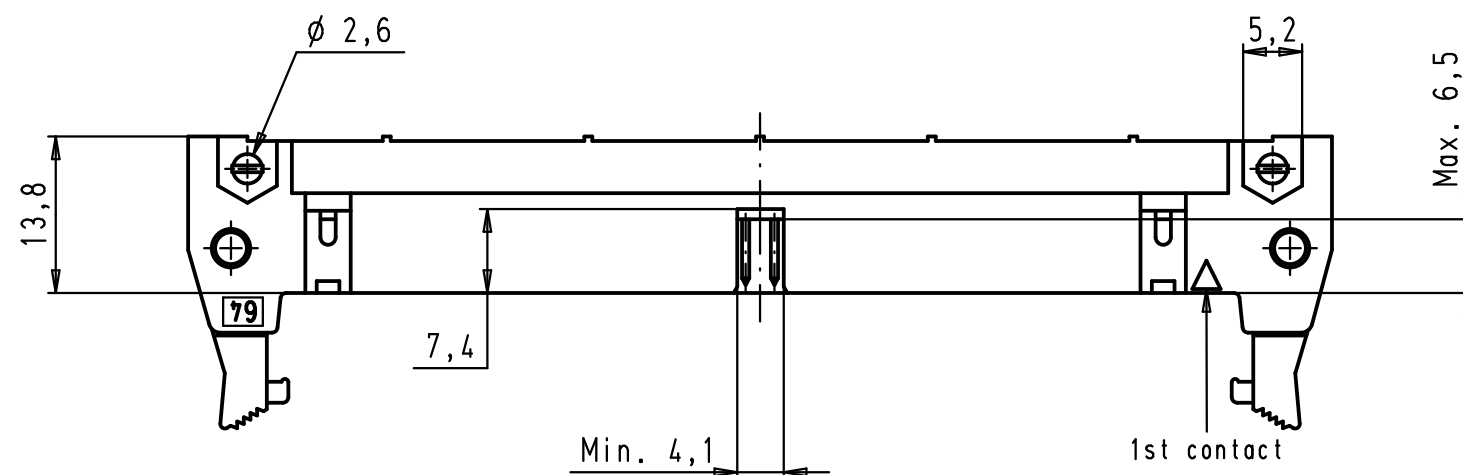

09 18 564 7953	3
09 18 564 6953	2
09 18 564 5953	0,76 $\mu\text{m Au}$
Part number	Performance level

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard 64 poles Angled pins, board locks and long locking levers	Maßstab/ Scale 1,5:1
			Detail.	25/04/02	CV			
			Insp.					
			Stand.					
34890	13/06/08	PK	HARTING EURL F-95972 Paris				TB 09 18 564 X953	Blatt/ Page 1 / 1
29778	25/04/02	CV						
Mod.	Det.	Name					Sub.	