

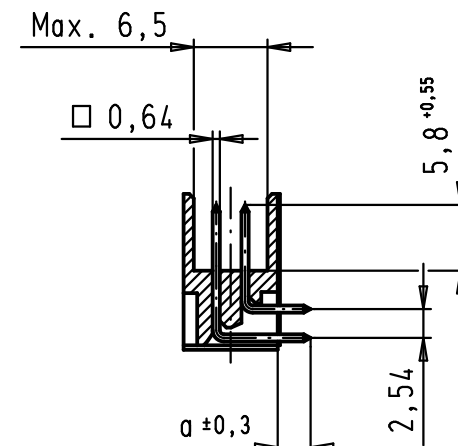
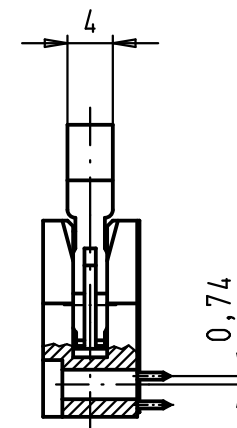
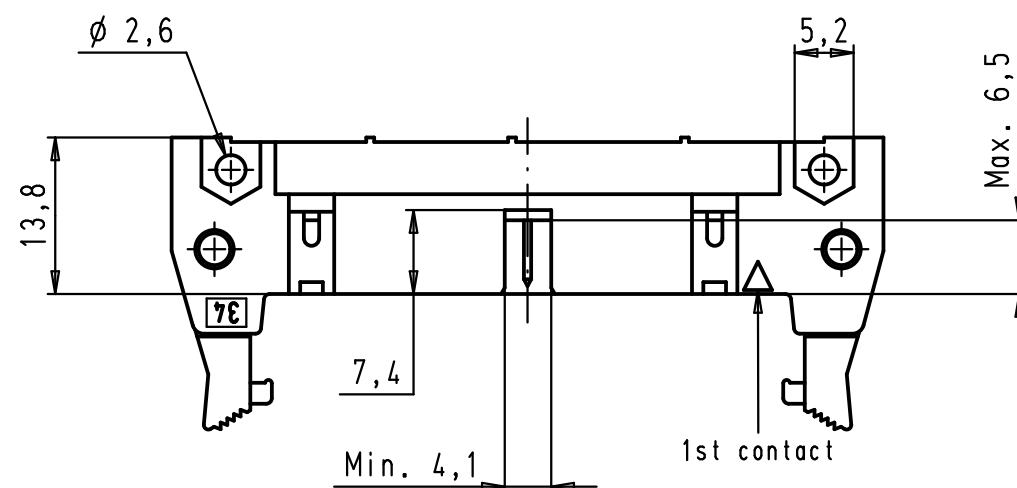
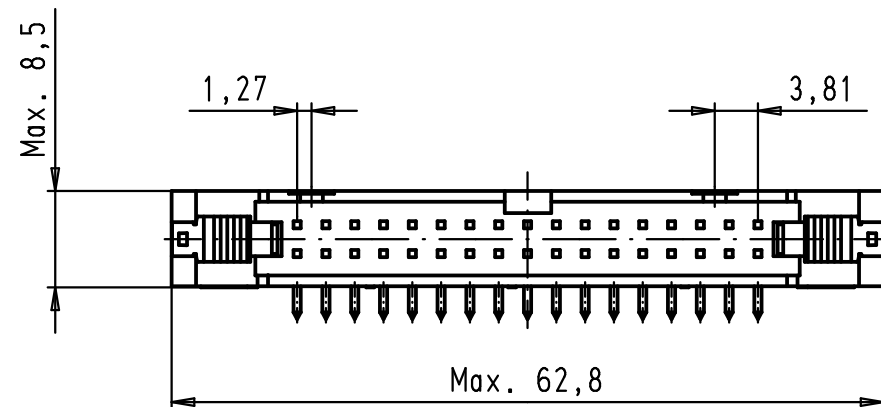


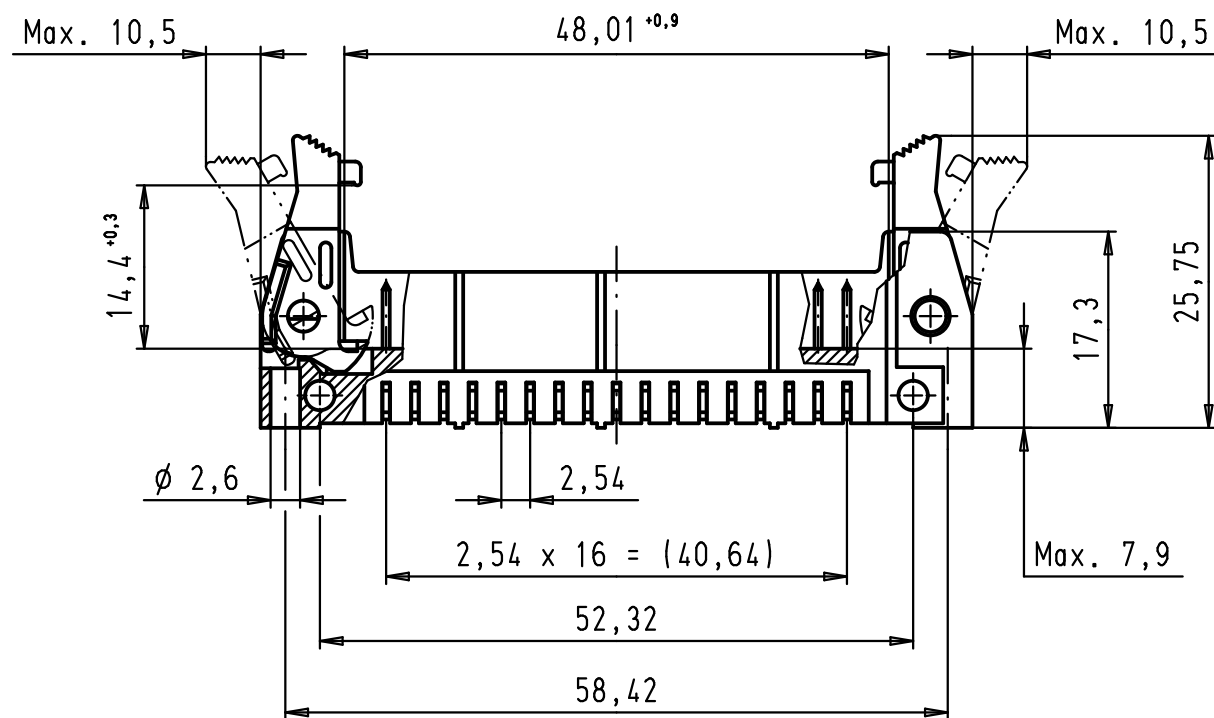

PCB layout, component side

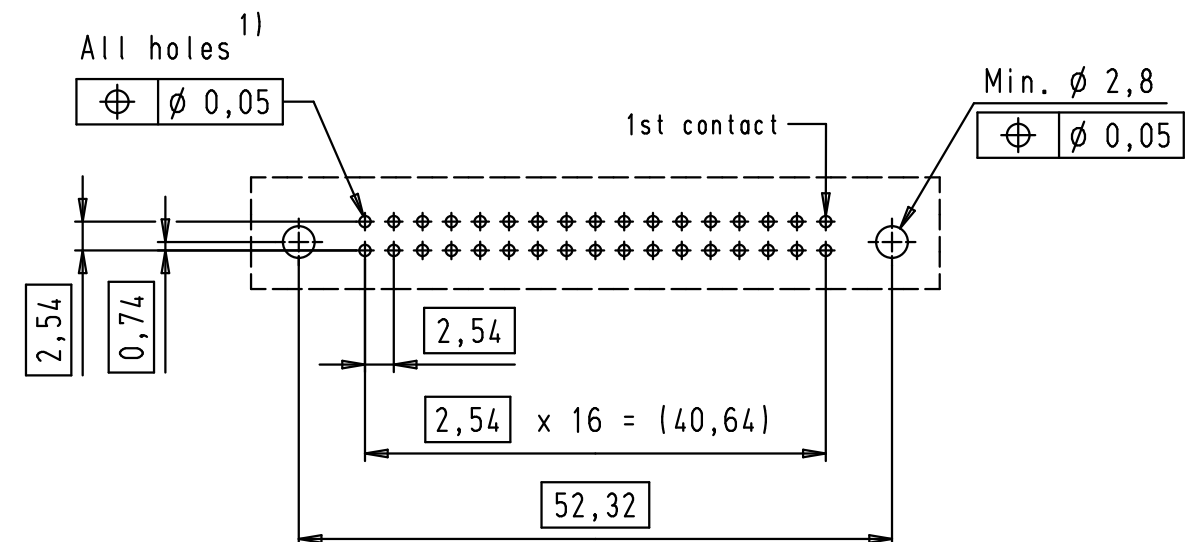

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

09 19 534 7901	3	4,5
09 19 534 6901	2	4,5
09 19 534 5901	0,76 $\mu\text{m Au}$	4,5
09 19 534 7903	3	2,9
09 19 534 6903	2	2,9
09 19 534 5903	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Det.	Name		SEK 19 Male Connector Standard		Maßstab/ Scale
			Detail.	25/04/02	CV		34 poles		1,5:1
			Insp.				High temperature, angled pins		
			Stand.				and long locking levers		
34890	04/02/08	PK	HARTING EURL				TB 09 19 534 X90X	Blatt/ Page 1 / 2	
29778	25/04/02	CV	F-95972 Paris						
Mod.	Det.	Name					Sub.		