
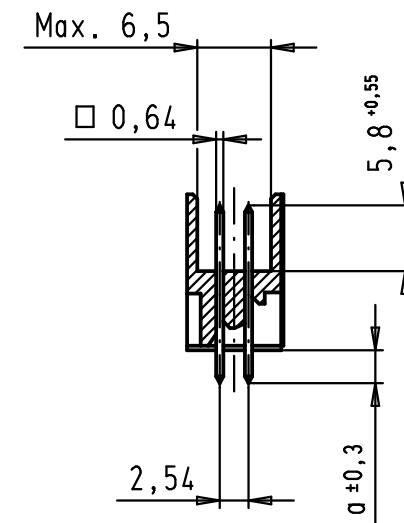
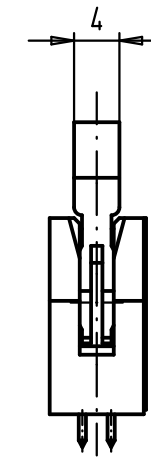


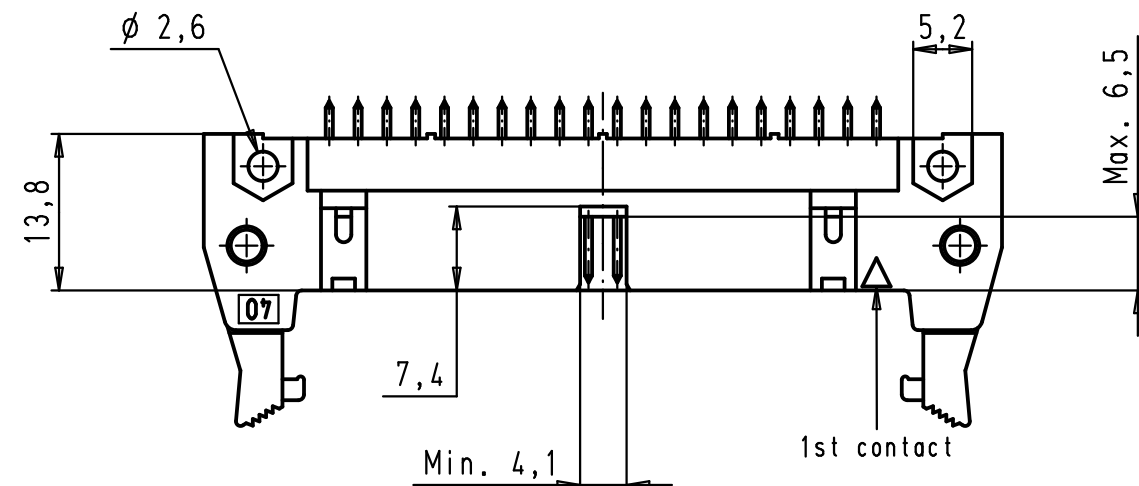

Technical drawing of a rectangular plate with the following specifications:

- Dimensions:**
 - Overall width: 66,04
 - Overall height: 2,54
 - Distance from top edge to centerline: 1,52
 - Distance between hole centers: 2,54
 - Distance from left edge to first hole center: 2,54
 - Distance from last hole center to right edge: 2,54
 - Distance between hole groups: 48,26 (calculated as $2,54 \times 19$)
- Hole Specifications:**
 - All holes: $\phi 0,05$
 - Min. $\phi 2,8$ (for the two larger holes)
- Other Features:**
 - 1st contact (indicated by an arrow pointing to the first hole group)

09 19 540 7902	3	4,5
09 19 540 6902	2	4,5
09 19 540 5902	0,76 $\mu\text{m Au}$	4,5
09 19 540 7904	3	2,9
09 19 540 6904	2	2,9
09 19 540 5904	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Dat.	Name		SEK 19 Male Connector Standard 40 poles High temperature with straight solder pins and long locking levers	Maßstab/ Scale 1,5:1
			Detail.	25/04/02	CV			
			Insp.					
			Stand.					
34900	28/01/08	LP	HARTING EURL F-95972 Paris				TB 09 19 540 X90X	Blatt/ Page 2 / 2
29778	25/04/02	CV						
Mod.	Dat.	Name						