

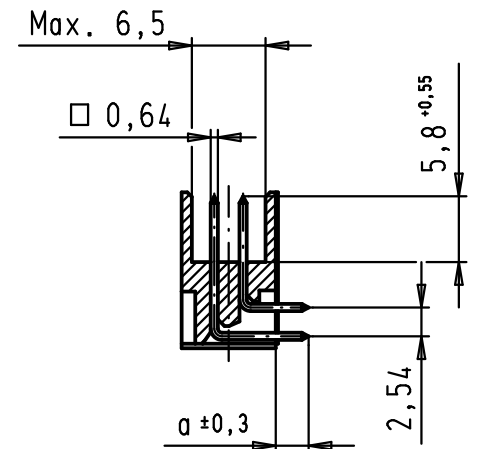
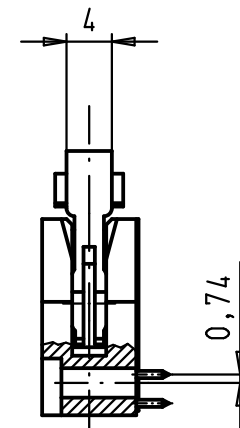
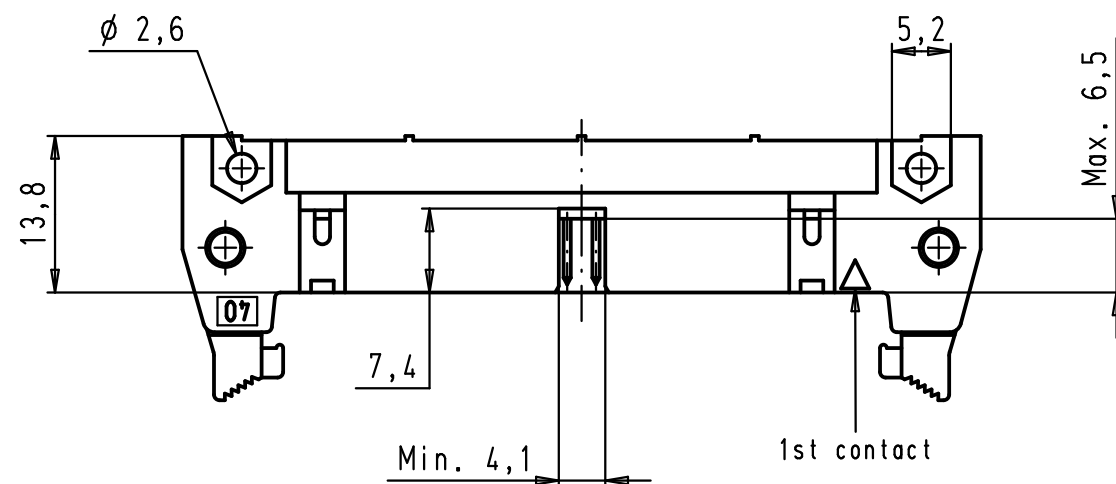
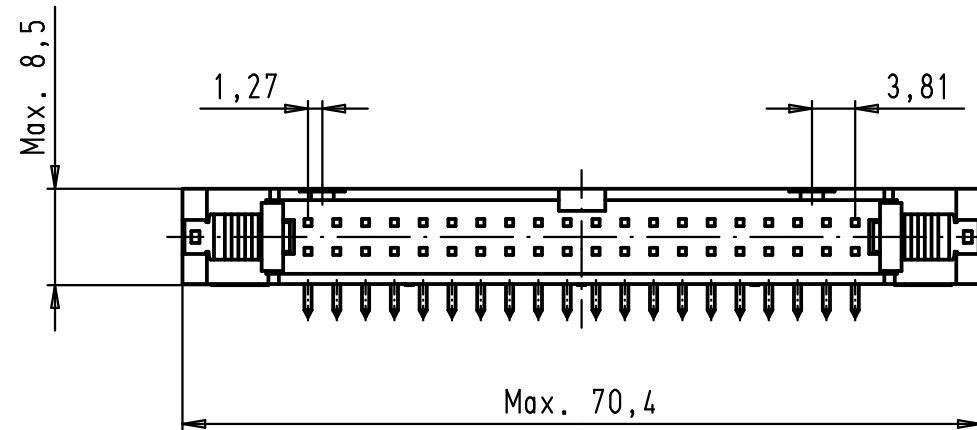


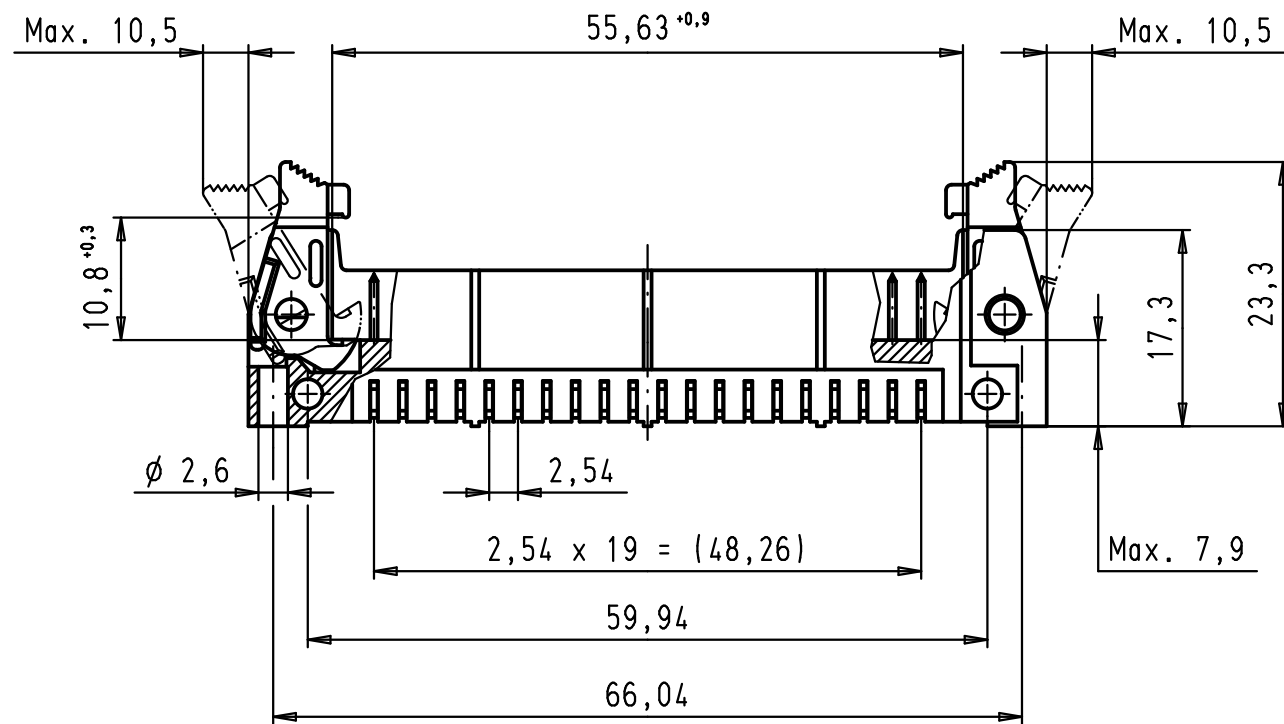


PCB layout, component side

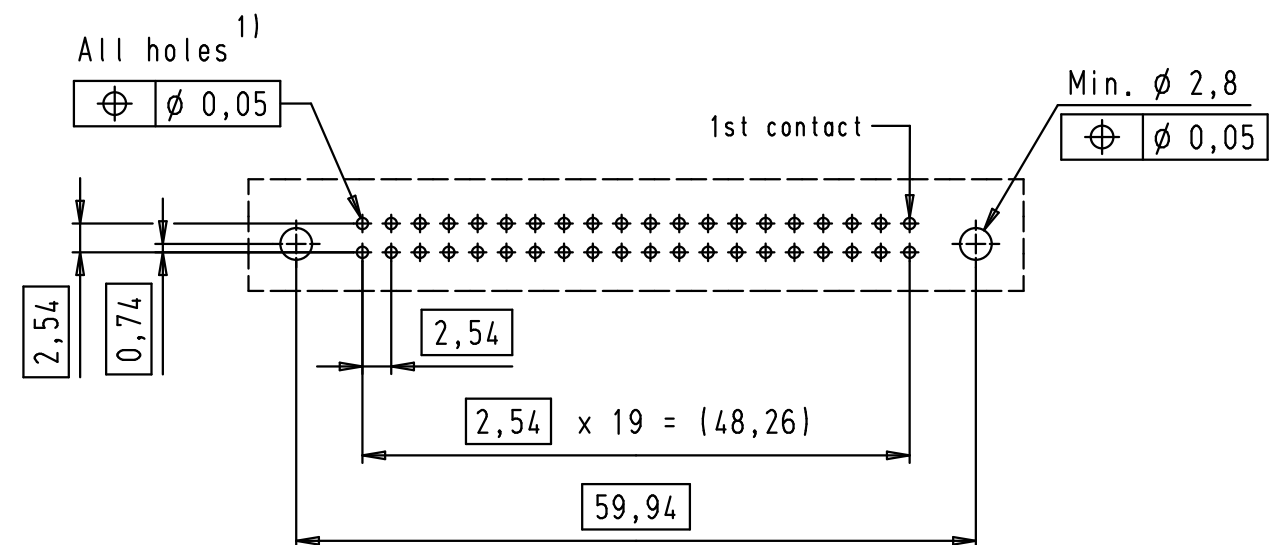

1) Solder pins for PCB connections
Ø1±0,1 according to IEC 60 326-3

09 19 540 7911	3	4,5
09 19 540 6911	2	4,5
09 19 540 5911	0,76 µm Au	4,5
09 19 540 7913	3	2,9
09 19 540 6913	2	2,9
09 19 540 5913	0,76 µm Au	2,9
Part number	Performance level	a

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 19 Male Connector Standard 40 poles High temperature, angled pins and short locking levers	Maßstab/ Scale 1,5:1
			Detail.	25/04/02	CV			
			Insp.					
			Stand.					
34890	04/02/08	PK	HARTING EURL F-95972 Paris				TB 09 19 540 X91X	Blatt/ Page 1 / 2
29778	25/04/02	CV						
Mod.	Det.	Name				Sub.		