

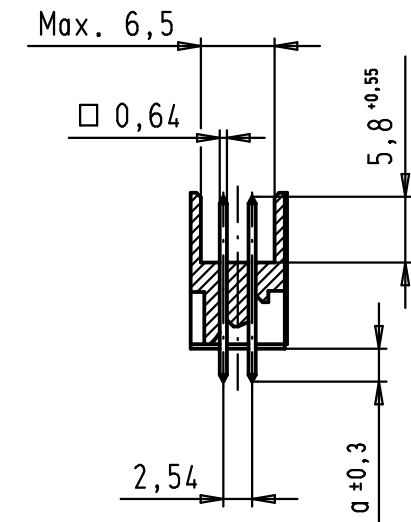
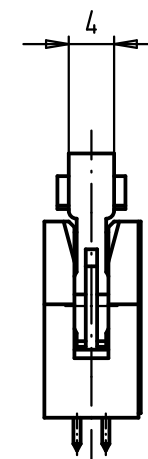


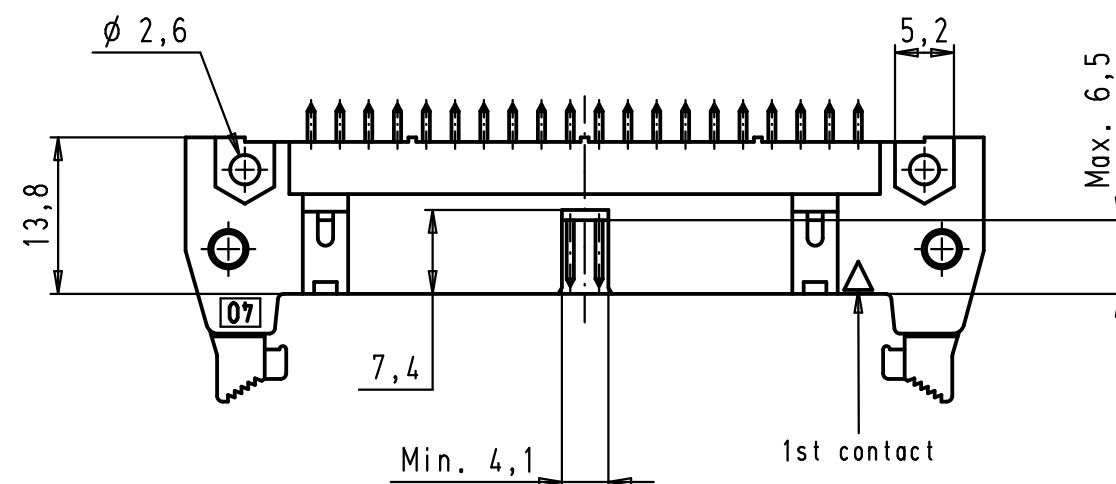

PCB layout, component side

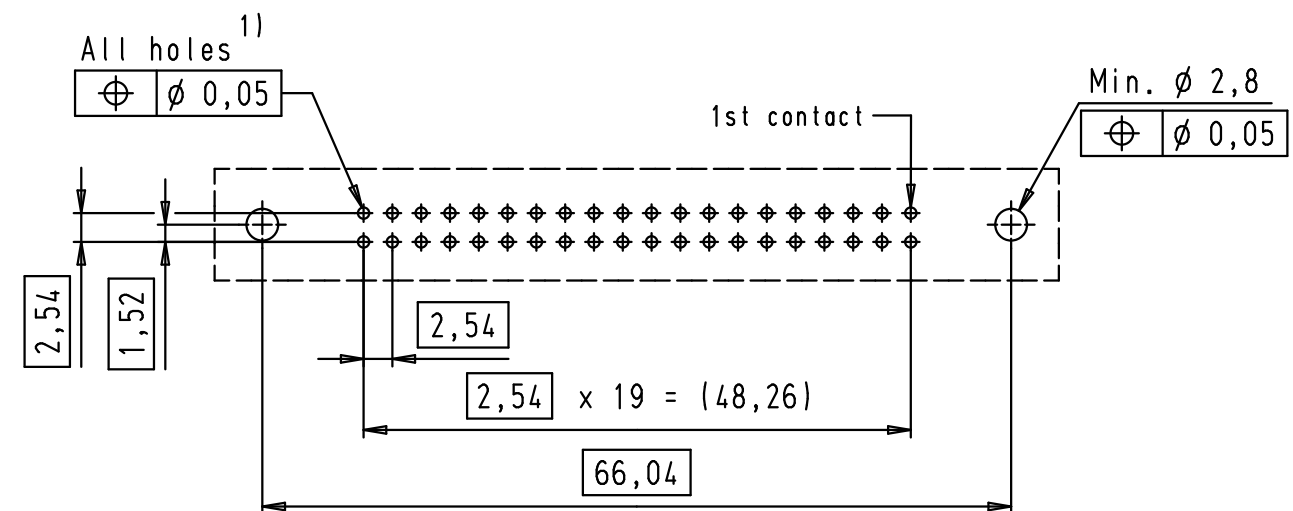

1) Solder pins for PCB connections
 $\varnothing 1 \pm 0,1$ according to IEC 60 326-3

09 19 540 7912	3	4,5
09 19 540 6912	2	4,5
09 19 540 5912	0,76 $\mu\text{m Au}$	4,5
09 19 540 7914	3	2,9
09 19 540 6914	2	2,9
09 19 540 5914	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 19 Male Connector Standard 40 poles High temperature with straight solder pins and short locking levers	Maßstab/ Scale 1,5:1	
			Detail.	25/04/02	CV				
			Insp.						
			Stand.						
34900	29/01/08	LP	HARTING EURL F-95972 Paris				 Sub.	TB 09 19 540 X91X	Blatt/ Page 2 / 2
29778	25/04/02	CV							
Mod.	Det.	Name							