






E

D


C

B

A

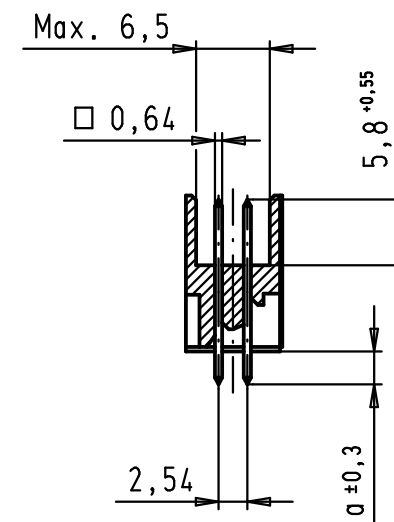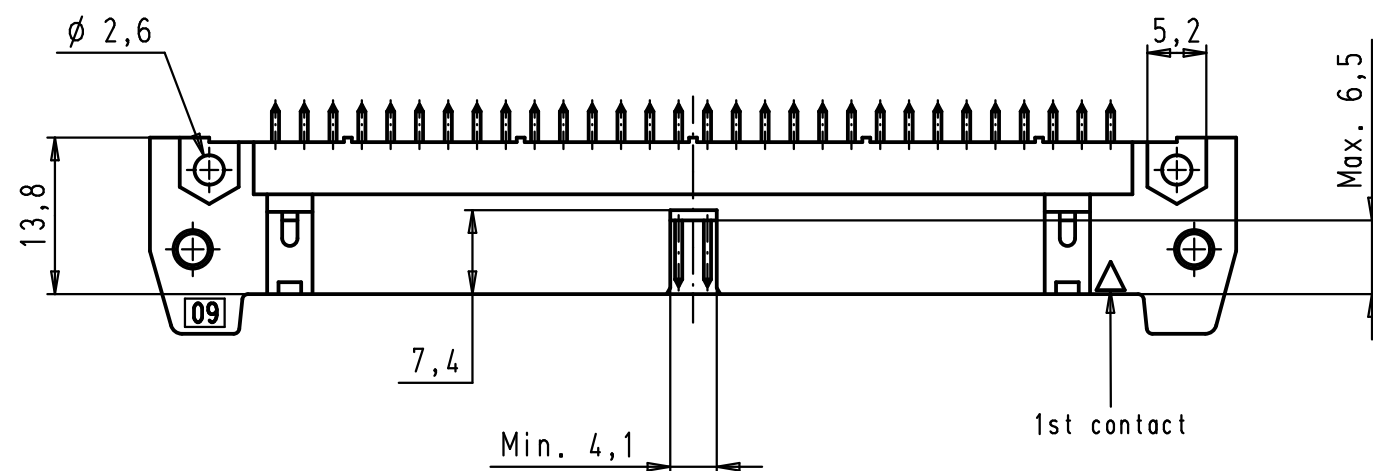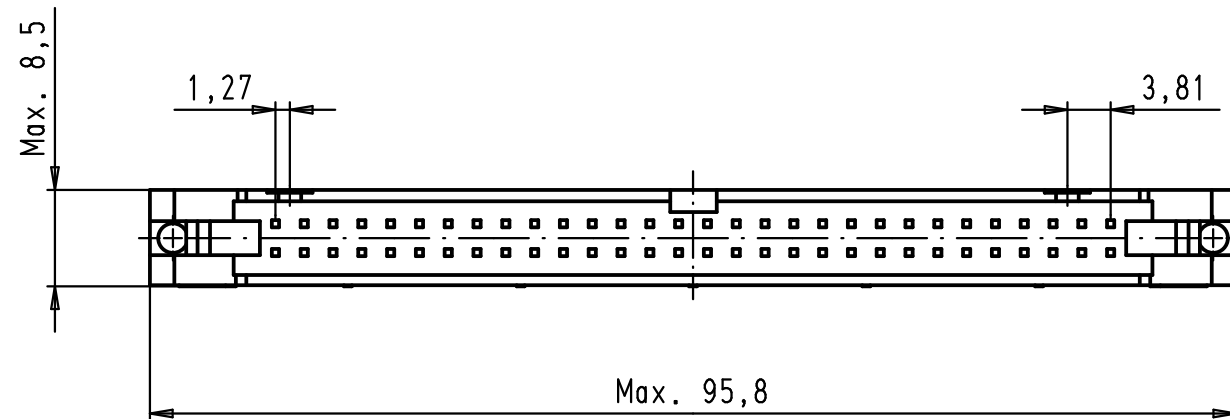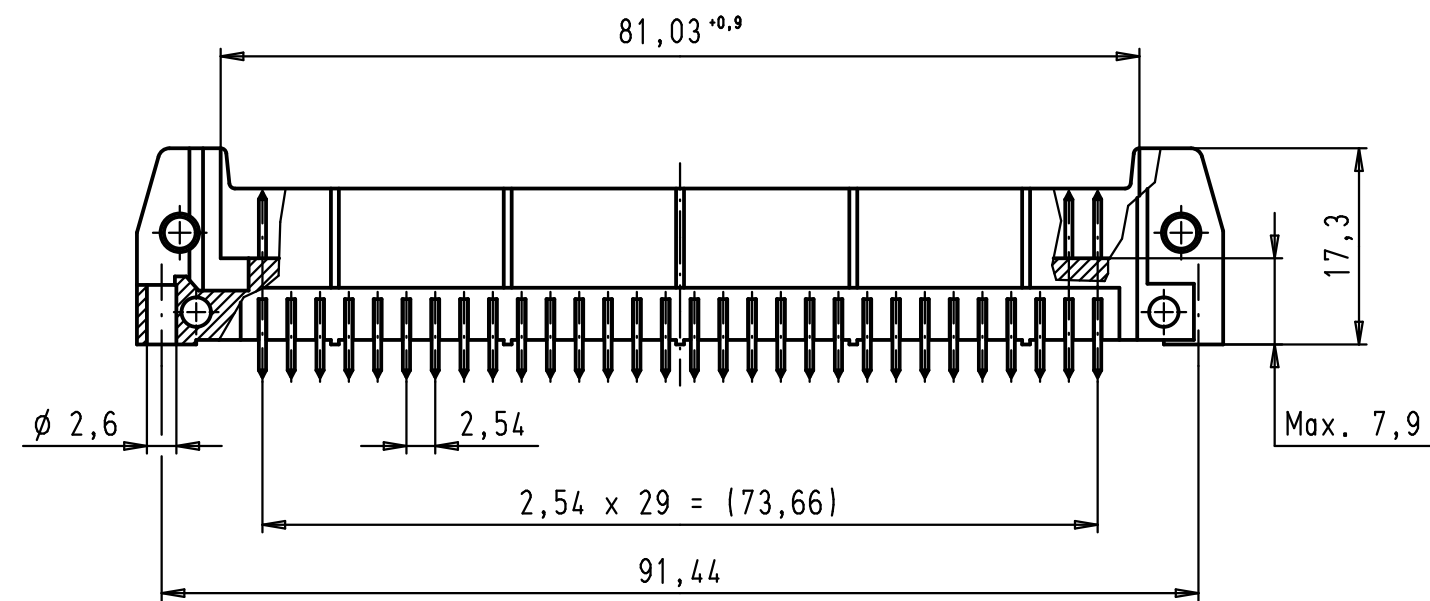

PCB layout, component side

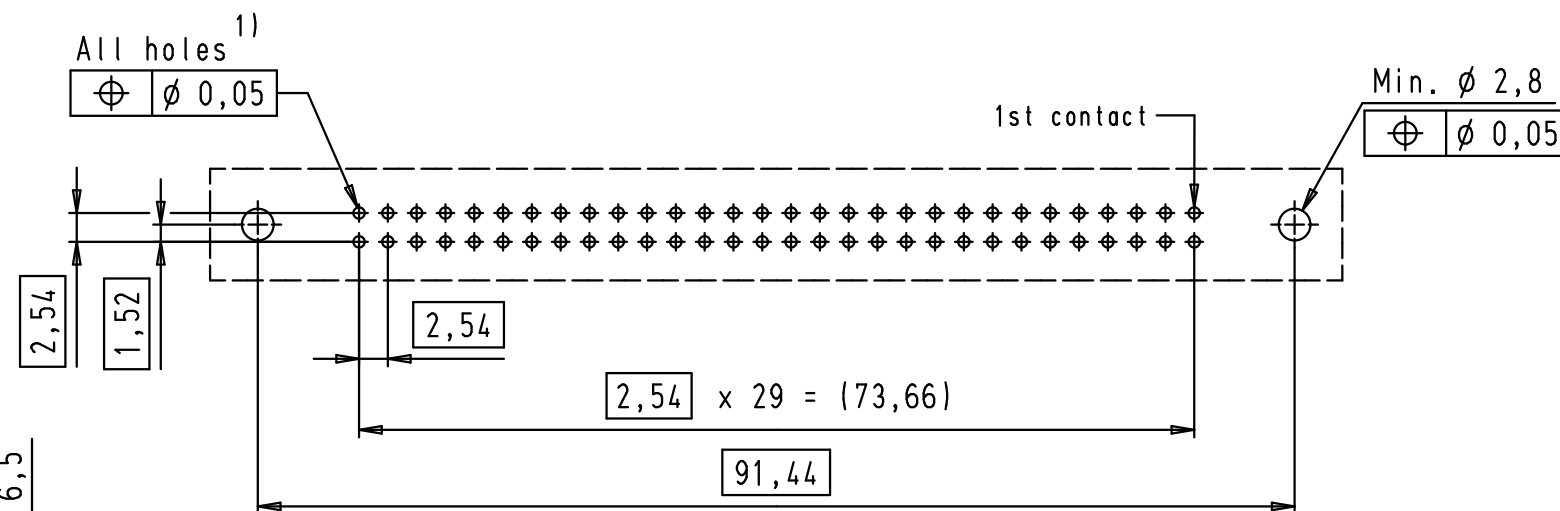

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

09 19 560 7922	3	4,5
09 19 560 6922	2	4,5
09 19 560 5922	0,76 μm Au	4,5
09 19 560 7924	3	2,9
09 19 560 6924	2	2,9
09 19 560 5924	0,76 μm Au	2,9
Part number	Performance level	a

				Det.	Name			
			Detail.	25/04/02	CV			
			Insp.					
			Stand.					
34900	29/01/08	LP	HARTING EURL F-95972 Paris				TB 09 19 560 X92X	
29778	25/04/02	CV						
Mod.	Det.	Name					Sub.	

SEK 19 Male Connector Standard
 60 poles
 High temperature with straight
 solder pins and without levers

Maßstab/
 Scale
 1,5:1
 Blatt/
 Page
 2/2