


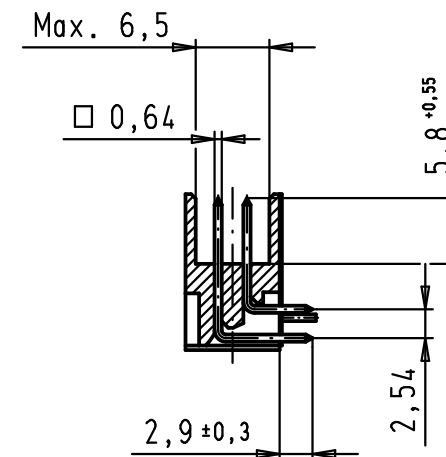
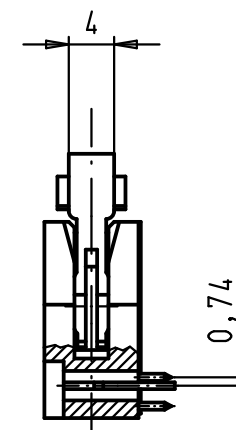
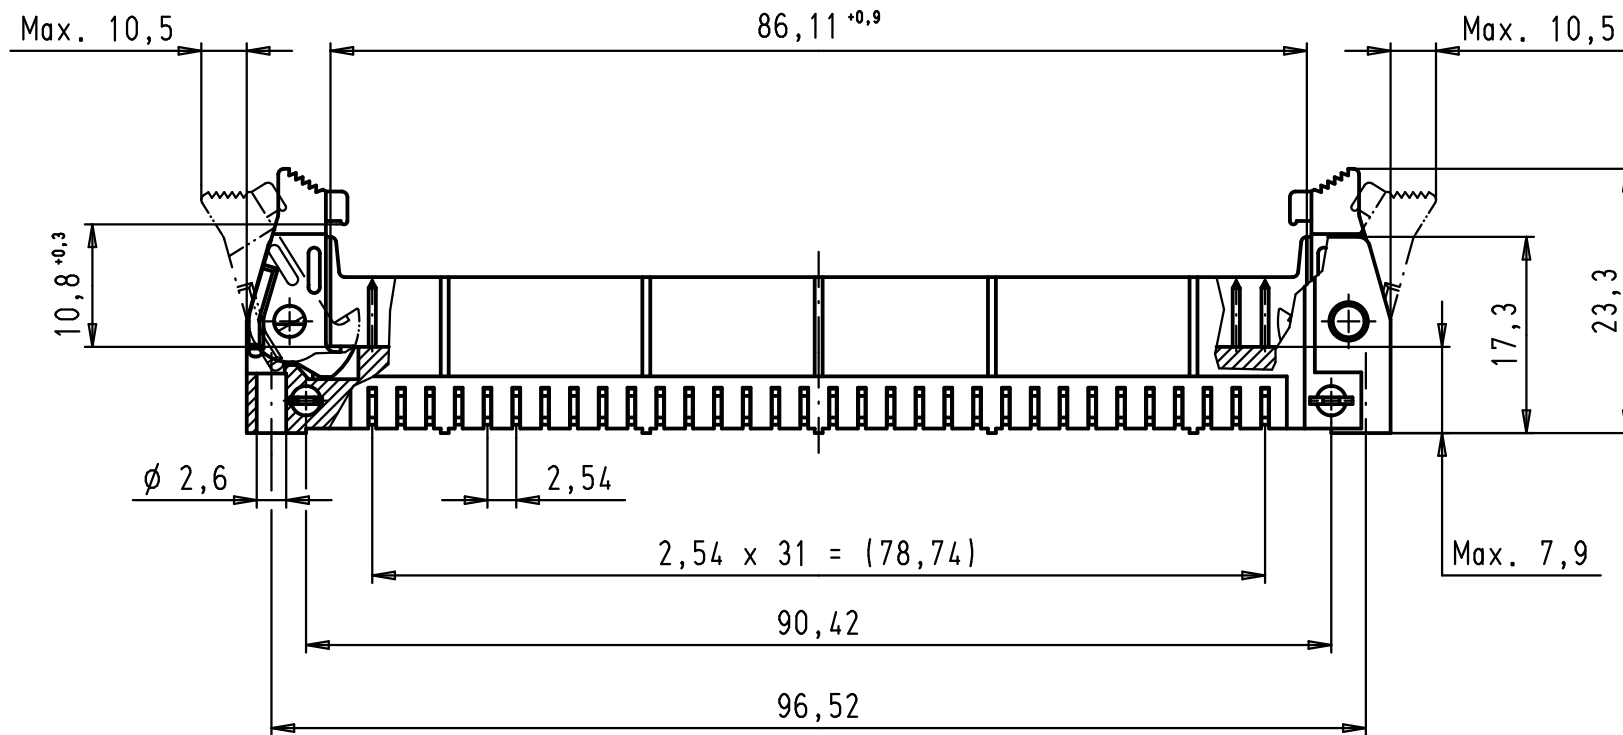


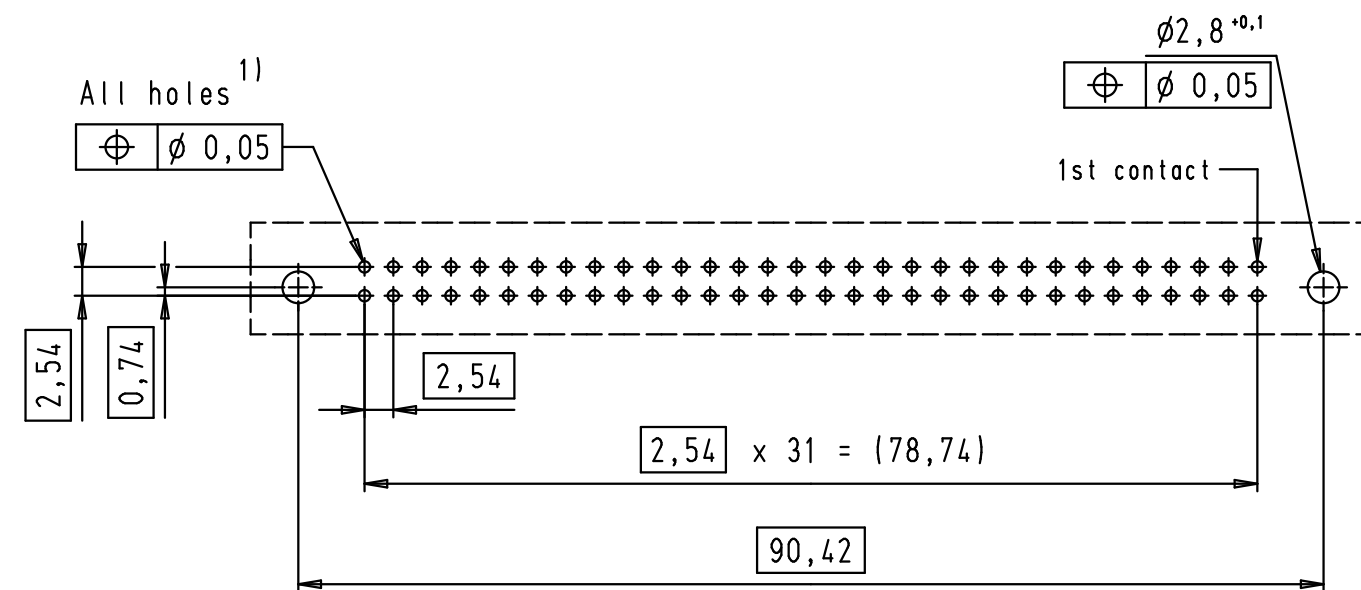

PCB layout, component side, thickness 1,6 mm

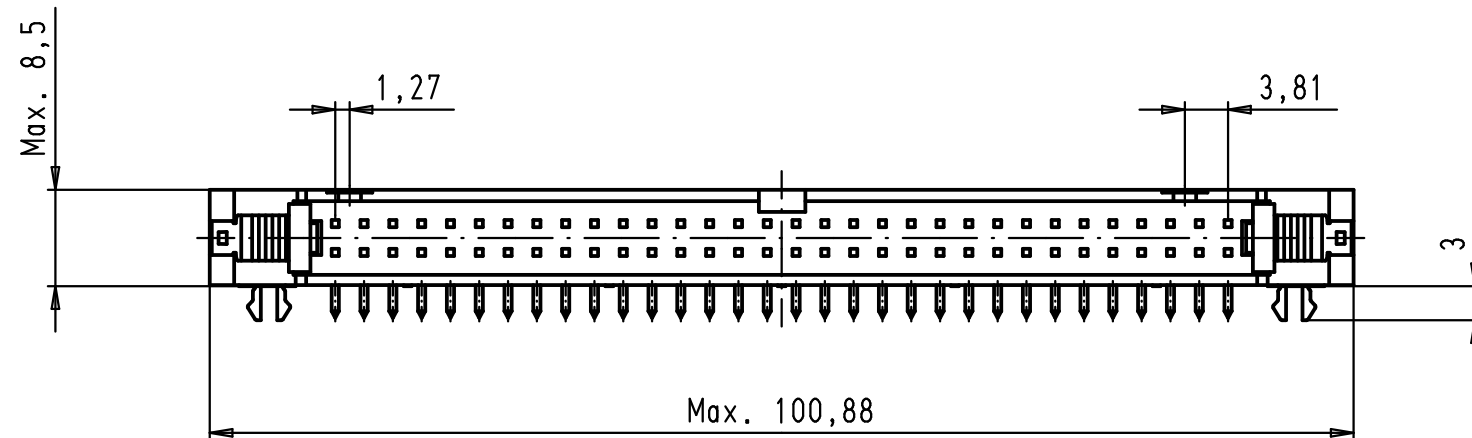

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

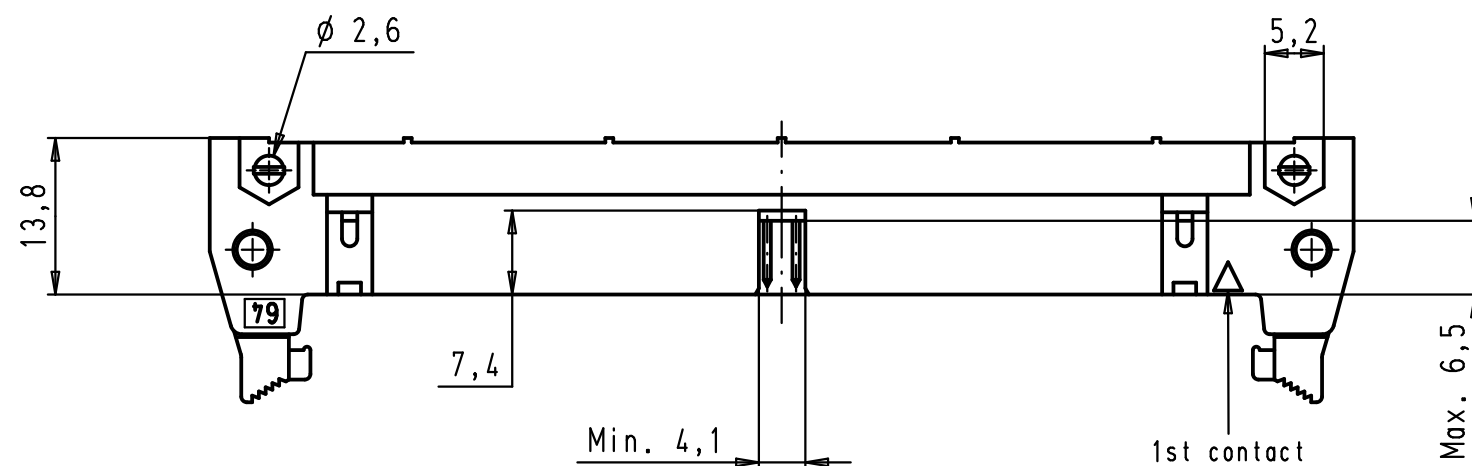

09 19 564 7963	3
09 19 564 6963	2
09 19 564 5963	0,76 $\mu\text{m Au}$
Part number	Performance level

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 19 Male Connector Standard	 TB 09 19 564 X963	Maßstab/ Scale 1,5:1 Blatt/ Page 1 / 1
			Detail.	25/04/02	CV		64 poles		
			Insp.				High temperature, angled pins,		
			Stand.				board locks and short locking levers		
34890	13/06/08	PK	HARTING EURL F-95972 Paris						
29778	25/04/02	CV							
Mod.	Det.	Name					Sub.		