
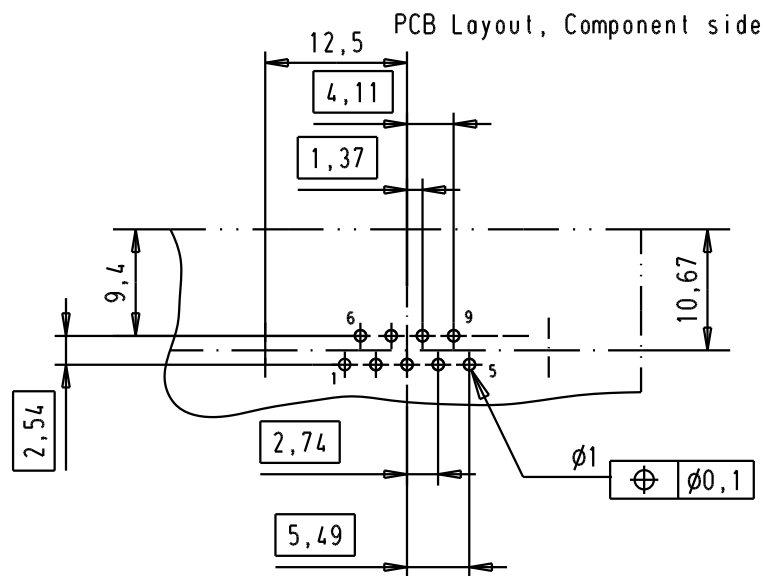
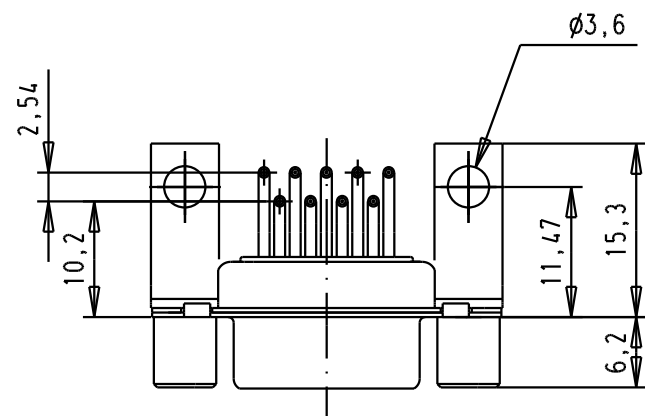
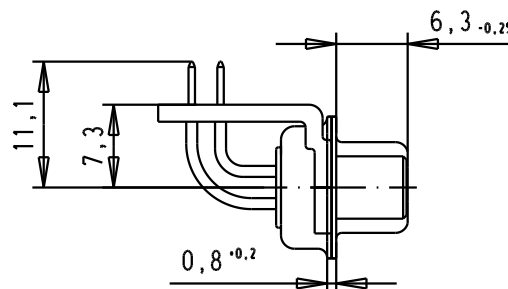


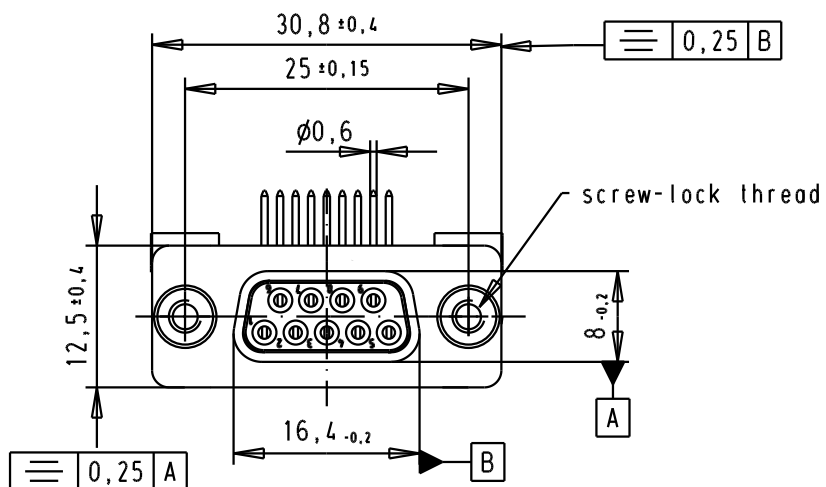

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

							Dat.	Name		D-Sub, female, angled, 9 Poles, solder pins, tin plated shell with brackets, screw-locks and holes	Mo?Mstab/ Scale 1.5:1
						Detail.	8 - JUL - 02	CV			
						Insp.					
						Stand.					
09641147229	M3		33231	07/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964114722x	Blatt/ Pag. 4 / 4
09641147228	UNC 4-40		31058	8 - JUL - 02	CV						
Part number	screw-lock thread		Mod.	Dat.	Name						