
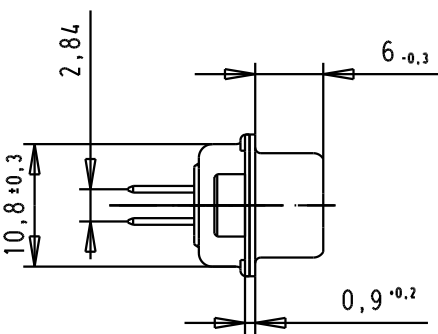




SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

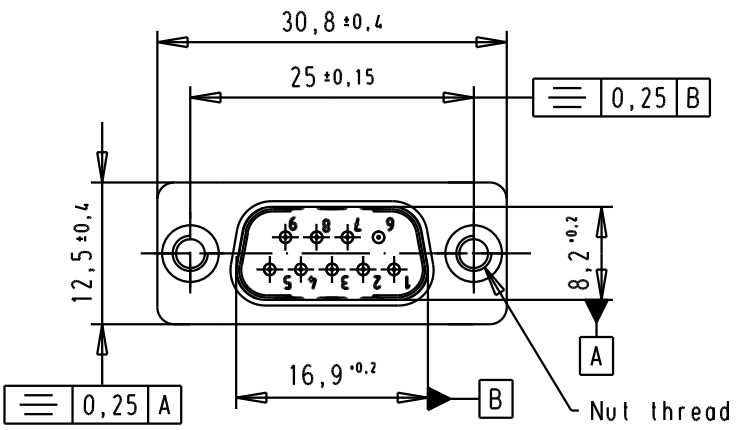

PCB Layout, Component side
PCB thickness 1,6 mm

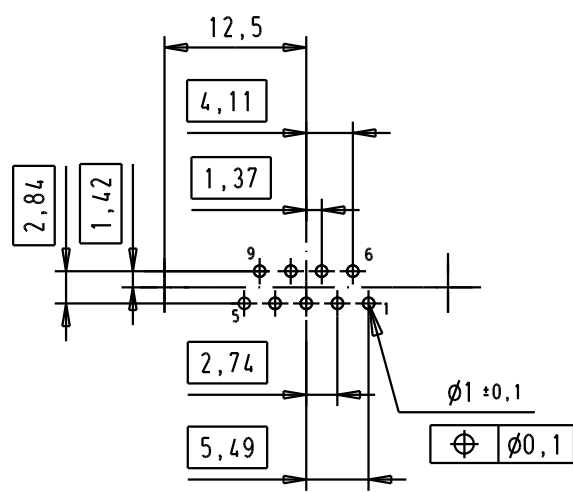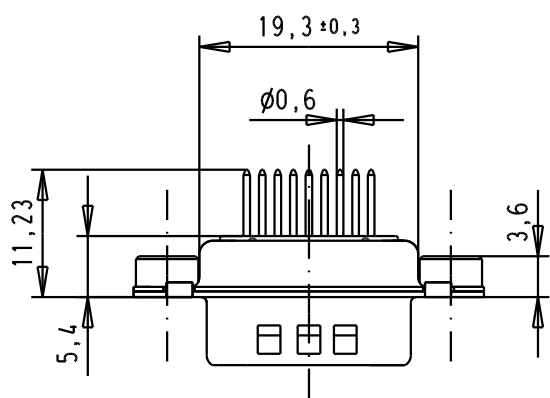

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 9 Poles, turned solder pins, tin plated shell with dimples and clinch nuts	Mo?Mstab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.					
			Stand.					
33250	03/11/05	JMDR						
32138	13/08/04	TR						
31058	8-JUL-02	CV						
Mod.	Dat.	Name	HARTING EURL F-95972 Paris				TB 0964122723x	Blatt/ Page 3 / 3
							Sub.	

09641227238	M3
09641227237	UNC 4-40
Part number	Nut thread