


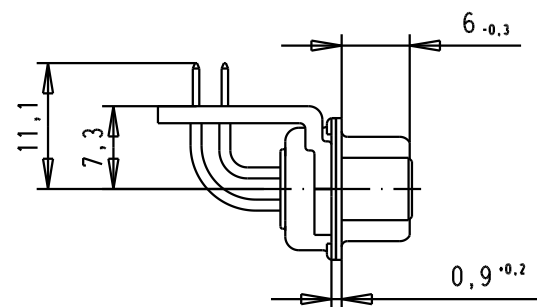


Technical drawing of a mechanical part showing dimensions and tolerances. The drawing includes a top view and a side view. Key dimensions and tolerances are as follows:

- Top view dimensions:
 - Overall width: 12,5
 - Distance from left edge to centerline: 9,4
 - Distance from centerline to right edge: 10,67
 - Distance from left edge to first hole center: 2,54
 - Distance between hole centers: 2,74
 - Distance from centerline to last hole center: 5,49
- Side view dimensions:
 - Overall height: 10,67
 - Distance from top edge to centerline: 9,4
- Hole specifications:
 - 9 holes in total, arranged in a 3x3 grid.
 - Top row holes: 4,11 (left), 1,37 (right).
 - Bottom row holes: 2,74 (left), 5,49 (right).
 - Center hole: 6 (top), 1 (bottom).
 - Top row hole tolerance: $\phi 1 \pm 0,1$
 - Bottom row hole tolerance: $\phi 0,1$

Mating Cycles	500
Filter type	C
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

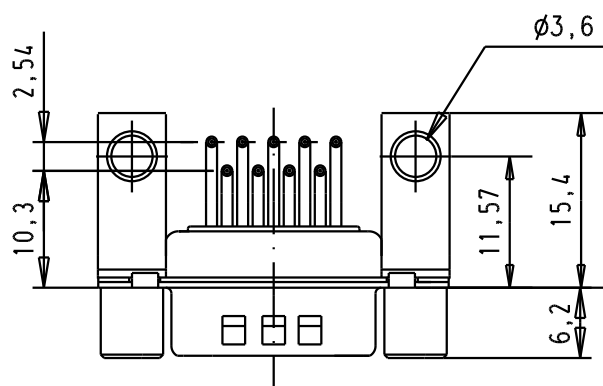

							Dat.	Name		D-Sub, male, angled, 9 Poles, solder pins, tin plated shell with dimples, brackets, holes and screw-locks	Mo?Ms lab/ Scale 1.5:1	
						Detail.	8- JUL -02	CV				
						Insp.						All Dim. in mm
						Stand.						Orig. Size DIN A 4
09641247219	M3		33241	14/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964124721x	Blatt/ Page 4 / 4	
09641247218	UNC 4-40		31058	8- JUL -02	CV							
Part number	Screw lock thread		Mod.	Dat.	Name							