


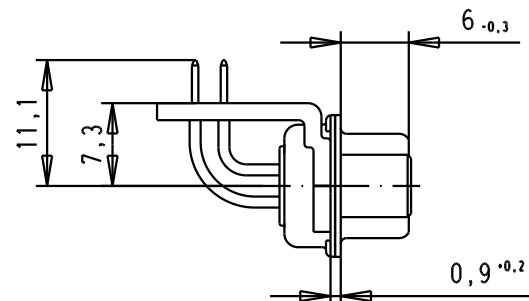


Technical drawing of a mechanical part showing a cross-section with dimensions and tolerances. The drawing includes a central horizontal axis with a dashed centerline. Key dimensions and features are labeled:

- Overall width: 12,5
- Top section width: 4,11
- Top section height: 1,37
- Left section height: 9,4
- Right section height: 10,67
- Bottom section width: 2,54
- Bottom section height: 2,74
- Bottom section width: 5,49
- Feature 1: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.
- Feature 2: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.
- Feature 3: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.
- Feature 4: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.
- Feature 5: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.
- Feature 6: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.
- Feature 9: A hole with diameter $\phi 1 \pm 0,1$ and position tolerance $\phi 0,1$.

Mating Cycles	500
Filter type	C
Capacitance	470pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

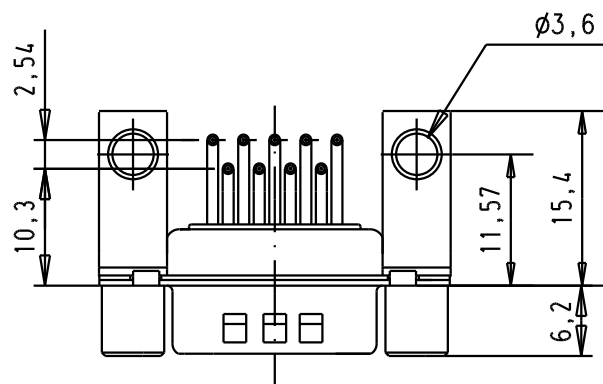

							Dat.	Name		D-Sub, male, angled, 9 Poles, solder pins, tin plated shell with dimples, brackets, holes and screw-locks	Mo?Mslob/ Scale 1.5:1
						Detail.	8- JUL -02	CV			
						Insp.					
						Stand.					
09641247229	M3		33241	14/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964124722x	Blatt/ Page 4 / 4
09641247228	UNC 4-40		31058	8- JUL -02	CV						
Part number	Screw lock thread		Mod.	Dat.	Name						