


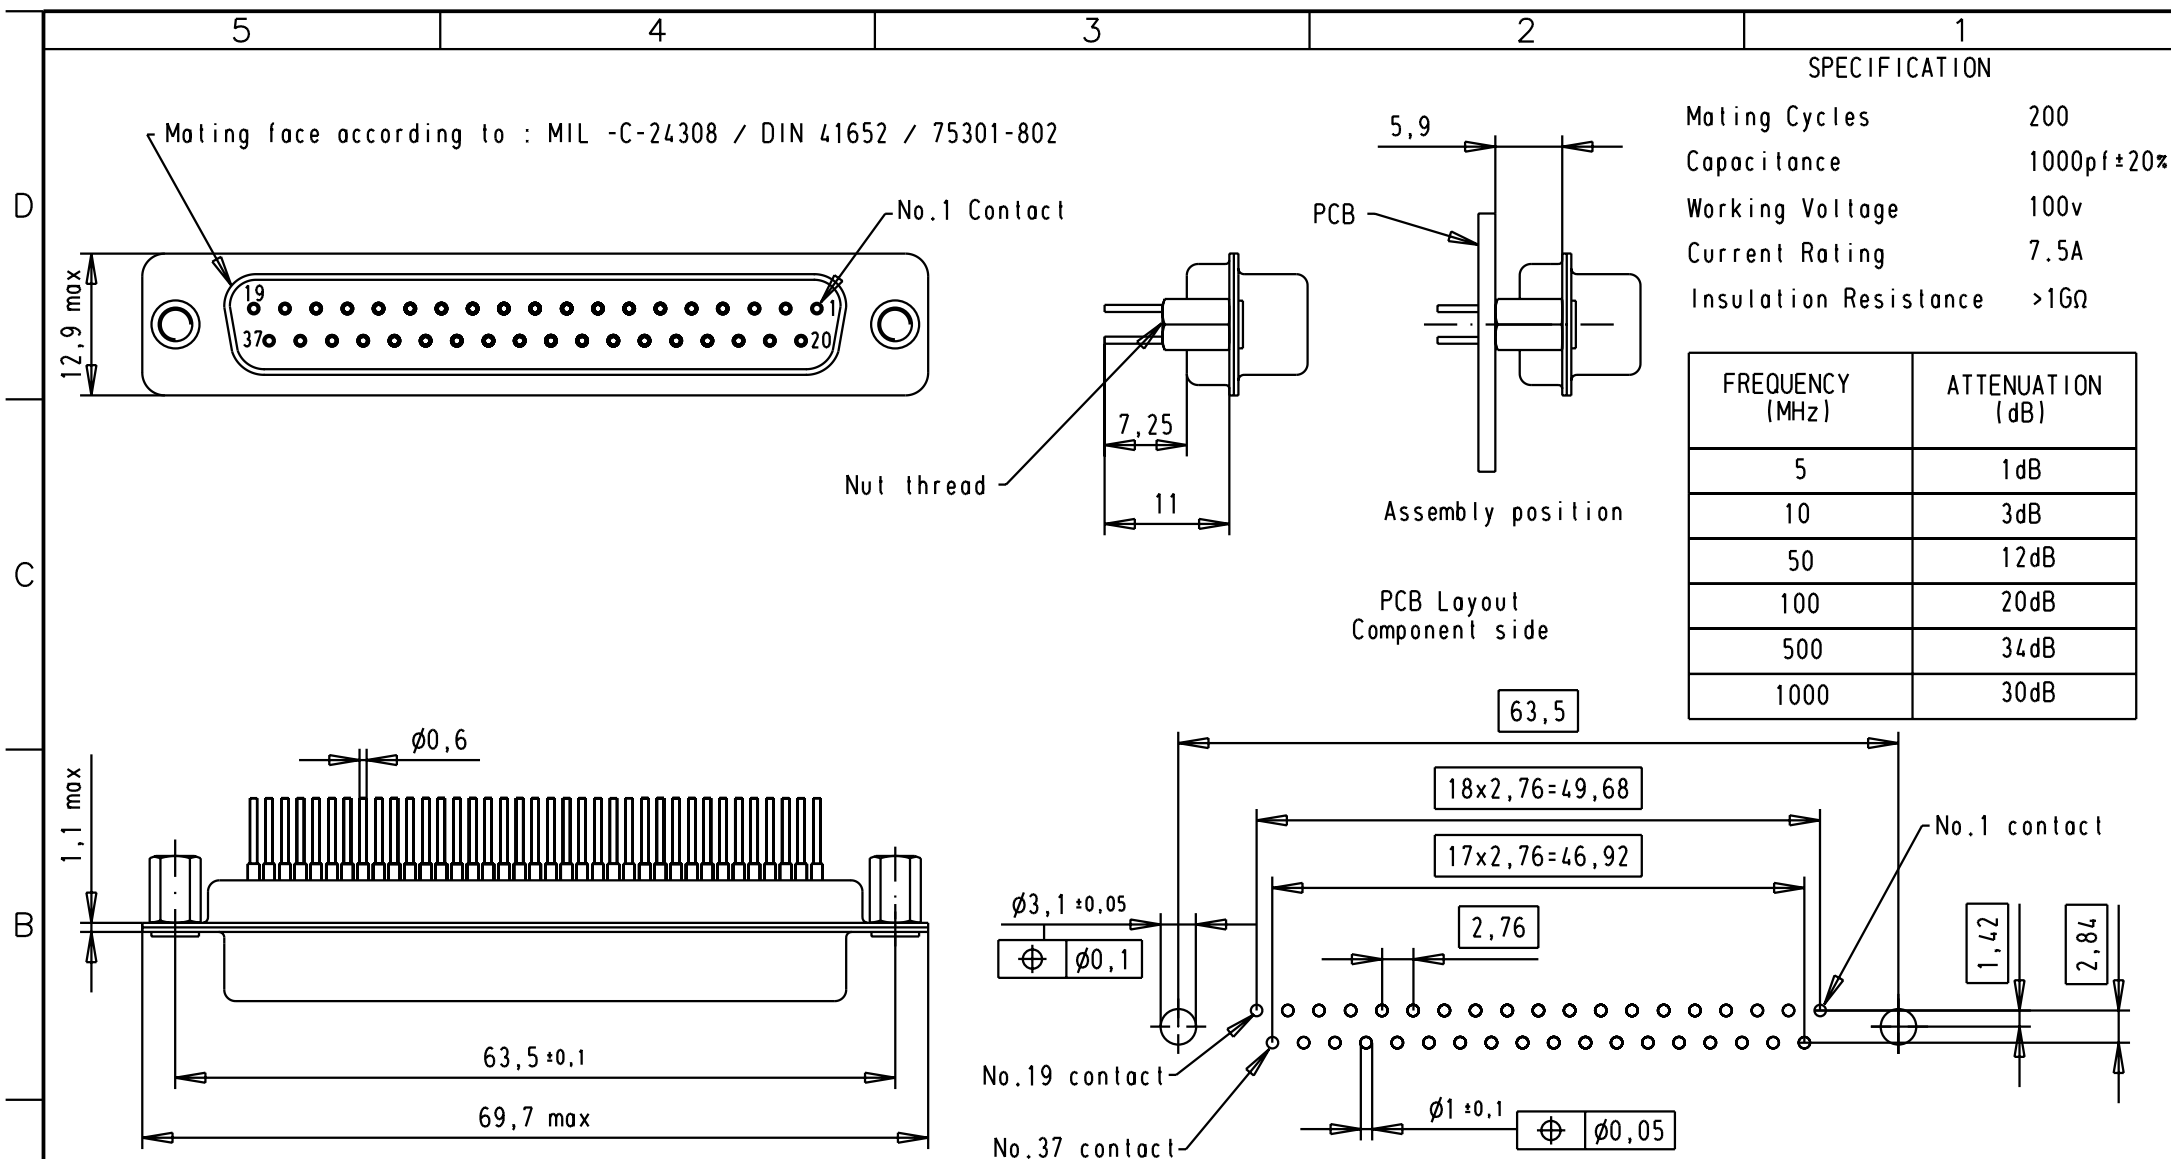

Mating Cycles	200
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

A							Dat.	Name		D-Sub, female, straight, 37 Poles, with turned solder pin and spacer nut	Mo?Mstab/ Scale 1.5:1		
							Detail.	8- JUL -02				CV	
							Insp.						All Dim. in mm
							Stand.						Orig. Size DIN A 4
	09644127234	M3					HARTING EURL F-95972 Paris				TB 0964412723x	Blatt/ Page 1 / 3	
	09644127233	UNC 4-40		31058	8- JUL -02	CV							
	Part number	Nut thread		Mod.	Dat.	Name							