



A1

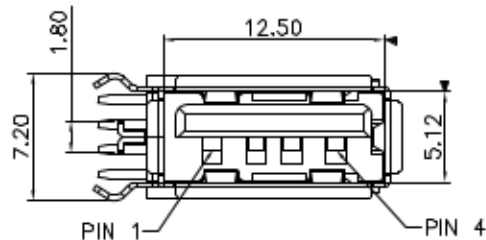

RECOMMEND PCB LAYOUT

NOTE:

MATERIAL:

HOUSING: PBT+30%GF (UL 94V-0)

SHELL: BRASS C2680-H T=0.3mm

TERMINAL: PHOSPHOR BRONZE C5191-H T=0.20mm

SPECIFICATION:

VOLTAGE CURRENT RATING: 1AMP 30V DC

INSULATION RESISTANCE: 1000MΩ MIN






INSULATION COLOR: BLACK

CONTACT RESISTANCE TERMINAL: 30mΩ MAX

WITHSTANDING VOLTAGE: 500V AC

MATING FORCE: 30N MAX

UNMATING FORCE: 10N MIN

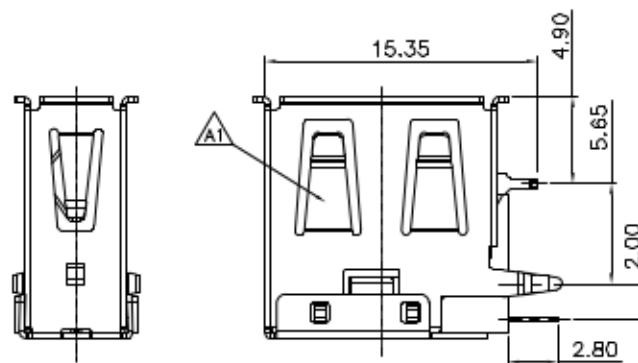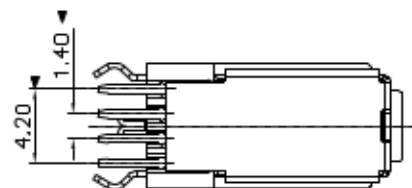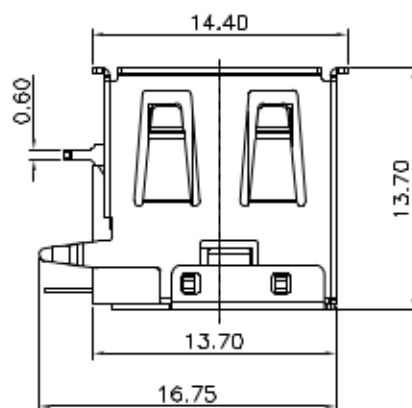

11/12/17	XIE	EG-N1112018	(新開模)將原來四彈片加寬·增加插拔耐久力	A1	A1
11/08/05	XIE		NEW DWG		A0
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表			CnC Tech,LLC		
X.X	±0.30	X.X"	±3.00"	APPD:	PRODUCT NO: 1001-008B-01001
X.XX	±0.25	X.XX"	±2.00"	CHECK:	DATE SCALE UNIT TYPE PAGE
X.XXX	±0.15	X.XXX"	±1.00"	DRAW:	2011.08.05 1:1 mm Z 1/1