
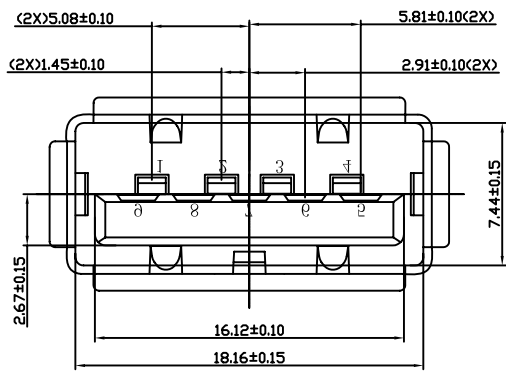
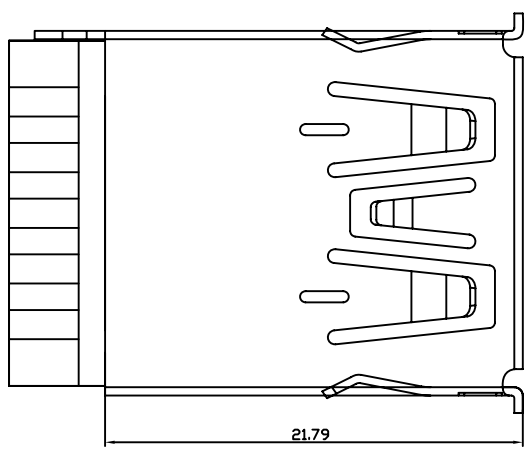
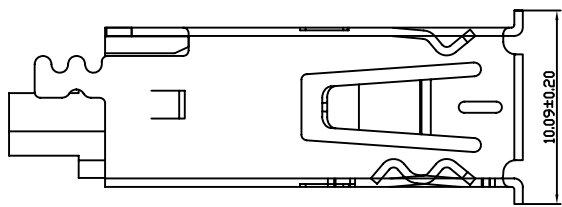
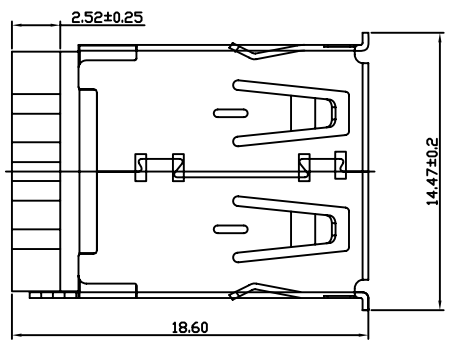




NOTE:
SPECIFICATION:
WITHSTANDING VOLTAGE:500V AC(RMS)
INSULATION RESISTANCT:1000MΩ MIN AT 1000V DC
CONTACT RESISTANCE:30mΩ MAX
CONTACTS
MATING FORCE:3.5KgF MAX
UNMATING FORCE:0.7KgF MIN

4	HOUSING	PBT	UL94V-0
3	SHELL	SPCC or Brass T=0.3mm	OVEP-PIATING: Ni Or Au
2	5P TERMINAL	Brass T=0.2mm	OVEP-PIATING: Au Ni/Sn
1	4P TERMINAL	Phosphor Bronze T=0.2mm	OVEP-PIATING: Au Ni/Sn
ITEM	DESCRIPTION	MATERIAL	REMARKS

12/07/04	XIE								A0		
DATE	DR.BY	ECN.NO.	DESCRIPTION				MARK	VER.			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			CnC Tech, LLC								
					TITLE: USB 3.0 A/F SOLDER 15U" Blue						
X.X	±0.25	X.X°	±3.00°	APPD:			PRODUCT NO: 1003-006-01200				
X.XX	±0.20	X.XX°	±1.00°	CHECK:			DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.15	X.XXX°	±0.500°	DRAW:			2012.07.04	1:1	mm	Z	1 / 1