

10078993-G0X-XXYLF






PLATING
0.76µm GXT (Pd Ni with gold flash)
over 1.27µm Nickel underplate

LATCH TYPE :
1 = STANDARD : For use with STRAIN-RELIEF 10073978
2 = LOW PROFILE : For use without STRAIN-RELIEF

SIZE : TOTAL NB OF POSITIONS
SEE SHEET 2

PACKAGING, SEE NOTE 4


SUFFIX LETTER "LF" INDICATES
THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 5.

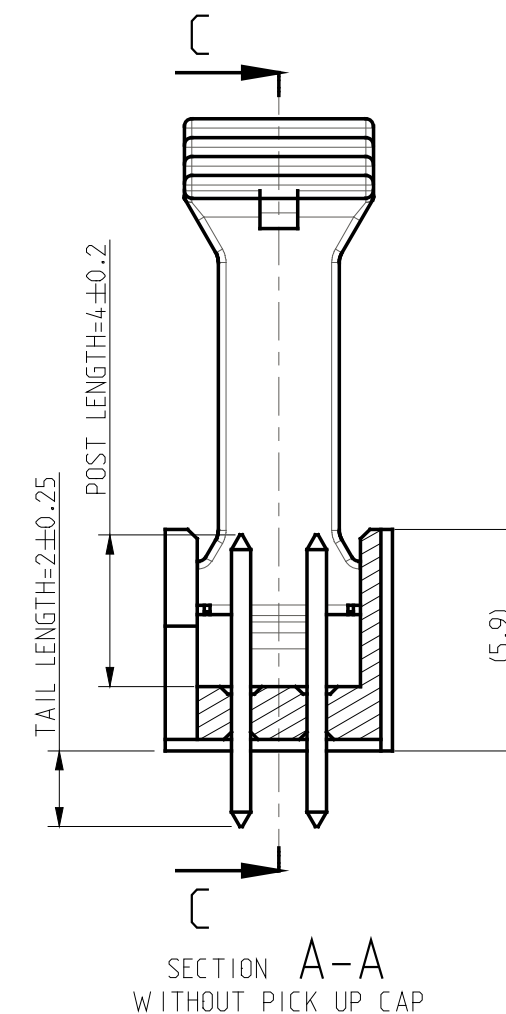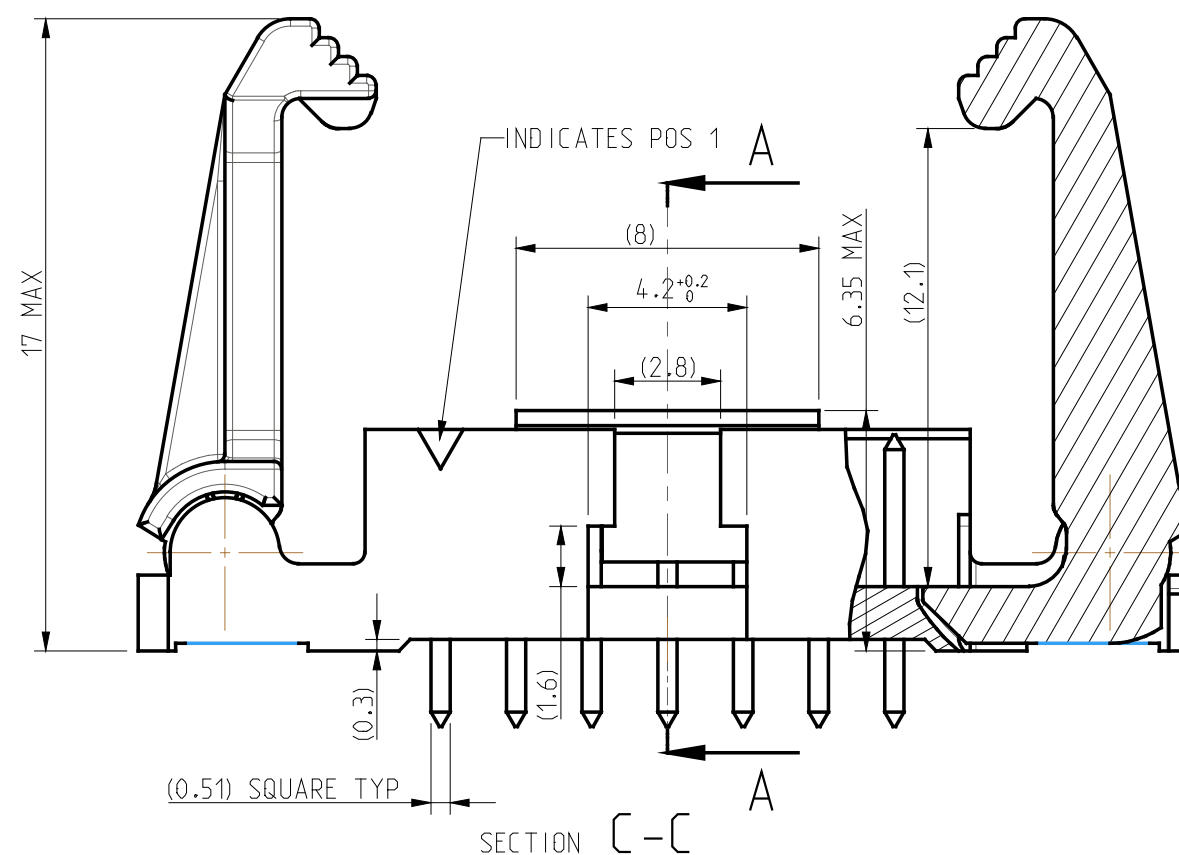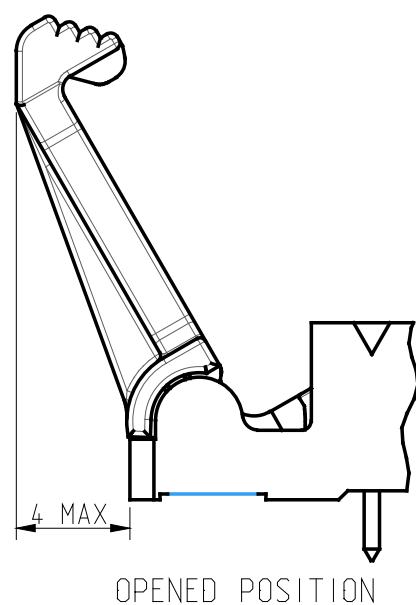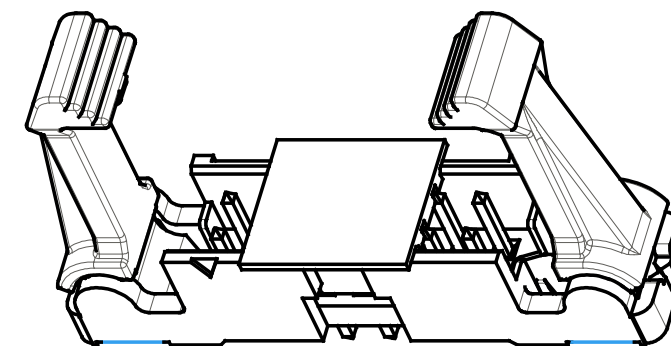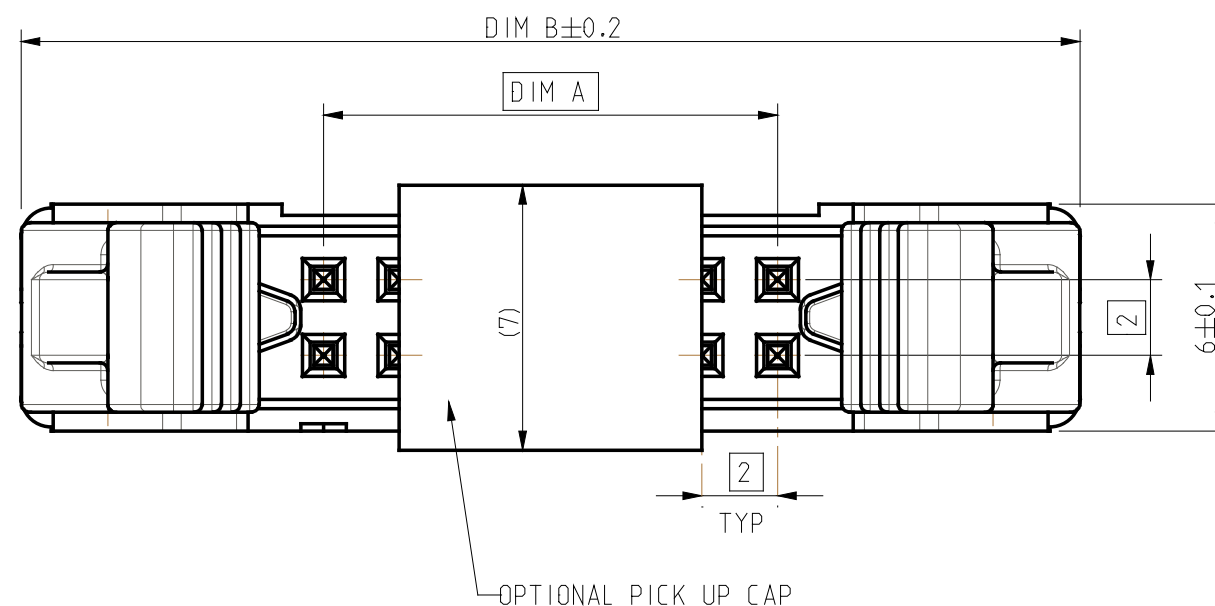




NOTES :

- 1- MATERIAL HOUSING : HIGH TEMPERATURE THERMOPLASTIC
UL 94 V0, COLOR CREAM.
- MATERIAL LATCH : HIGH TEMPERATURE THERMOPLASTIC
UL 94 V0, COLOR BLACK.
- 2- MATERIAL TERMINAL : COPPER ALLOY
- 3- PIN RETENTION IN EITHER DIRECTION : 7N MIN
- 4- PACKAGING
U= TUBE WITHOUT PICK UP CAP .
A= TAPE & REEL WITH PICK UP CAP.
- 5- ROHS COMPATIBLE PRODUCT SPECIFICATIONS :
 - a- PLATING :
"LF" MEANS THE PRODUCT IS LEAD FREE
2µm MATTE TIN MIN ON TAIL OVER 1.27µm NICKEL UNDERPLATE.
 - b- MANUFACTURING PROCESS COMPATIBILITY
THE HOUSING WILL WITHSTAND EXPOSURE TO 260 °C PEAK TEMPERATURE FOR
30 SECONDS MAX IN A CONVECTION, INFRA RED, VAPOR PHASE OR REFLOW OVEN.
 - c- LABELLING
MEETS PACKAGING SPECS AS PER GS-14-920.
 - d- THIS PRODUCT MEETS EUROPEAN DIRECTIVES
AND OTHER CONTRY REGULATION AS DESCRIBED
IN GS-22-008

rev	ecn no	dr	date
A	F08-0110	LSA	08-01-16
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		- ✓	tolerance std ISO 406 ISO 1101		projection 		mm 		
TOLERANCES UNLESS OTHERWISE SPECIFIED												
Dr	NEBU PM	07-06-19	ANGULAR	LINEAR	0.X		±/		size A3	Scale 5:1		
Eng	JM COMPAGNON	07-06-19			0.XX		±/					
Chr	JM COMPAGNON	07-06-19	0°	±°	0.XXX		±/		ECN -			
Appr	L. SAILLARD	07-06-19	Product family -						Spec ref -			
			title EJECT LATCH HEADER VERTICAL PIP					dwg no 10078993			Rev. A	
catalog no			-					CUSTOMER			sheet 1 of 2	

SIZE	POSITIONS	DIM A	DIM B
06	2x 3	4,00	20,00
08	2x 4	6,00	22,00
10	2x 5	8,00	24,00
12	2x 6	10,00	26,00
14	2x 7	12,00	28,00
24	2x12	22,00	38,00
30	2x15	28,00	44,00
40	2x 20	38,00	54,00
44	2x 22	42,00	58,00
50	2x 25	48,00	64,00

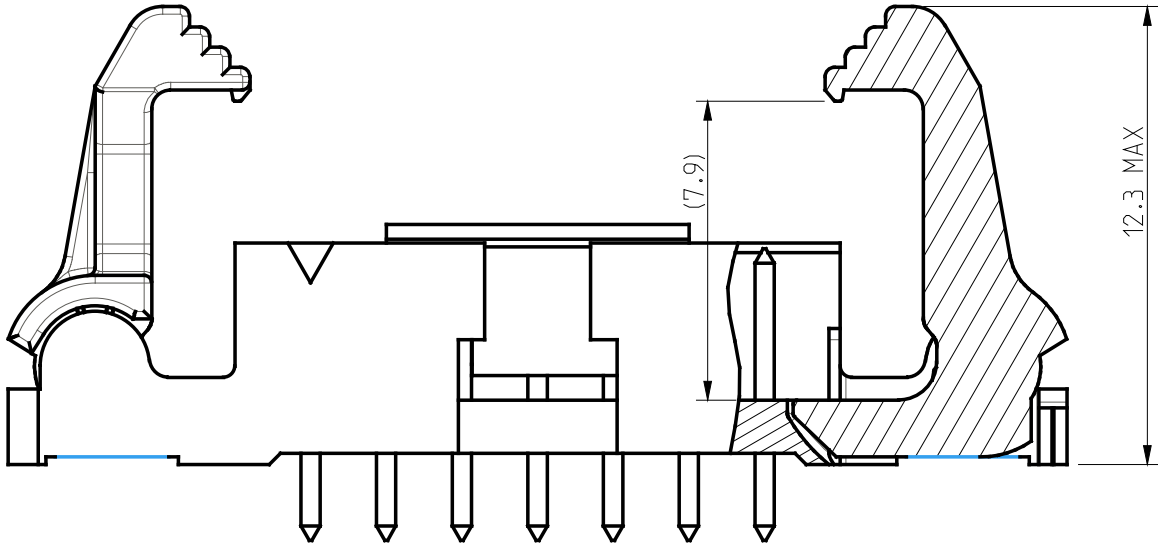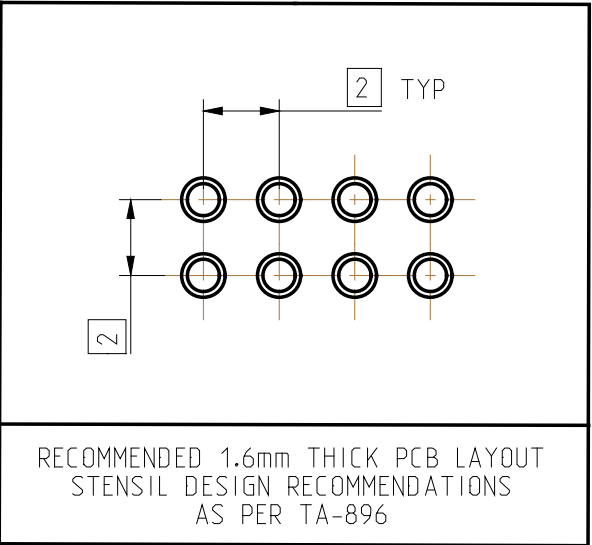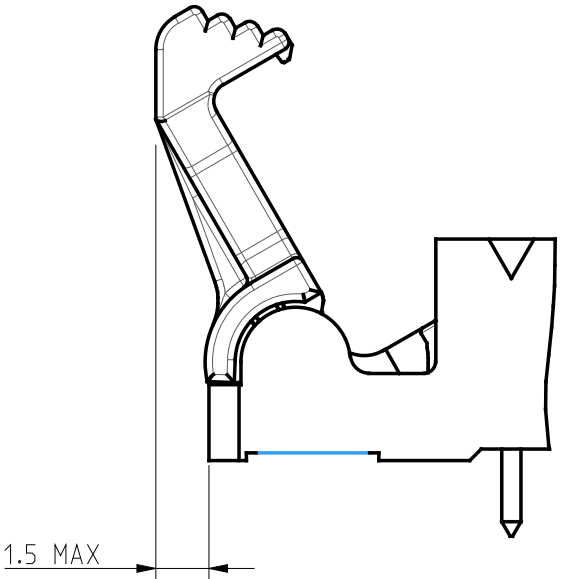


SECTION C-C


EXAMPLE 10078993-G02-14YLF
LOW PROFILE LATCH


PRODUCT USED IN COMBINATION WITH IDC
RECEPTACLE P/Ns 89361 & 89941

WITH STRAIN-RELIEF ACCESSORY
- STANDARD LATCH -

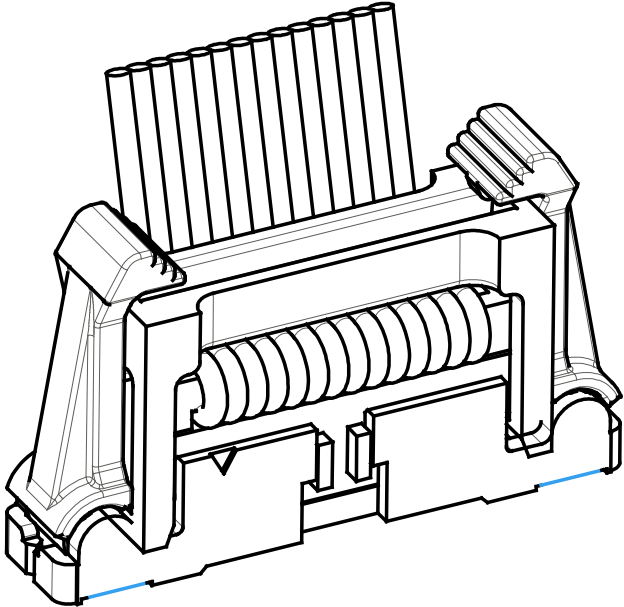

WITHOUT STRAIN-RELIEF ACCESSORY
- LOW PROFILE LATCH -

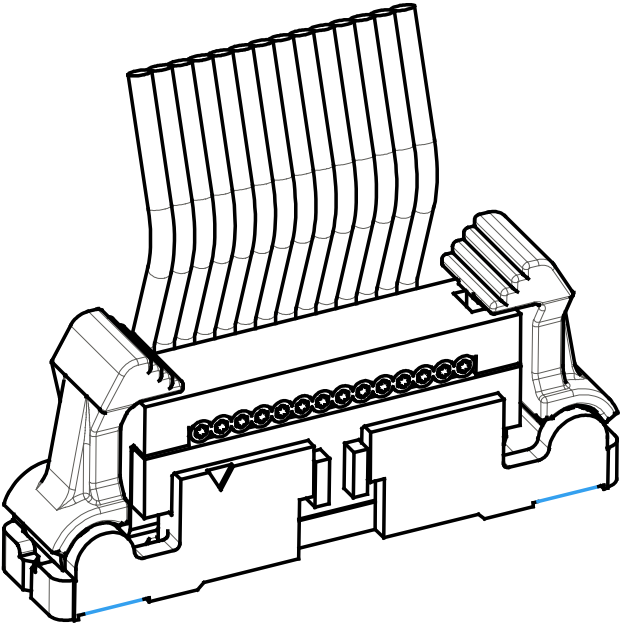

www.fciconnect.com			surface ISO 1302		- ✓	tolerance std ISO 406 ISO 1101		projection 	mm 
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	NEBU PM	07-06-19	ANGULAR	LINEAR	0.X	±/	size	Scale	
Eng	JM COMPAGNON	07-06-19			0.XX	±/	A3	5:1	
Chr	JM COMPAGNON	07-06-19			0° ±°	0.XXX	±/	ECN	-
Appr	L. SAILLARD	07-06-19	Product family				-	Spec ref	-
			title EJECT LATCH HEADER VERTICAL PIP				dwg no 10078993		Rev. A
catalog no			-				CUSTOMER	sheet 2 of 2	