

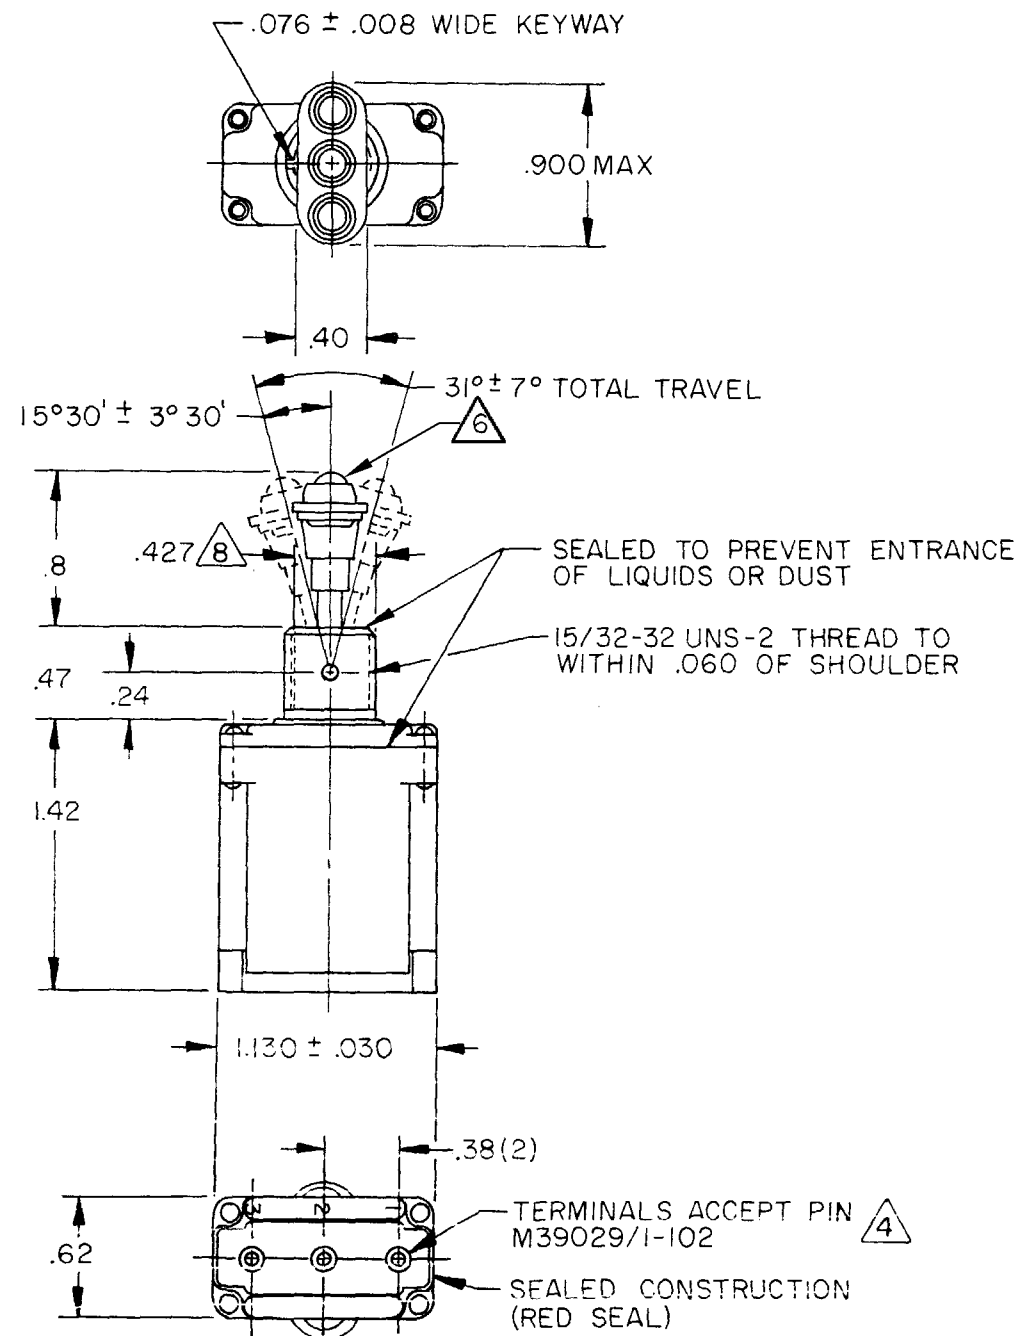
FREEDPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG. CODE 91929

CATALOG LISTING




101TL2133 SERIES

CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND DATE CODE IDENTIFIED ON SIDE OF SWITCH
- 3 FURNISHED UNASSEMBLED
- 4 THE SEALING GROMMET SHALL SEAL ON A SMOOTH WIRE INSULATION OF .040 TO .083 DIAMETERS (16-20 GAGE)
- 5 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSTIONS
- 6 ULTRAVIOLET LIGHT SENSITIVE BLUE/GREEN FLUORESCENT CAP IS ATTACHED TO LEVER BY A LOCKING TYPE INTERNAL THREAD. LEVER CAP FURNISHED UNASSEMBLED
- 7 - UNUSED TERMINAL HOLES MAY BE SEALED WITH PLUGS M83723/28-20
- 8 FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD

[illegible]

CATALOG LISTING
101TL2133 SERIES CHART 1

ISSUE	7	M
-------	---	---

REVISIONS

A	PR13838
	T S K
18	APR 85
B	C092297
	J A K
	16 FEB 98
C	200061
	J J A
	22 FEB 00
D	204128
	K E D
	10 OCT 01
E	205815
	G J W
	13 JUN 02
F	206396
	C S L
	9 SEP 02

RASTER

DRAWN

RELEASE NO. PR-13838	REPLACES
----------------------	----------

ЧЕЗ

CHECK

CHECK

85

181

SC

1

ON
TW

Two

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

TOLERANCES ARE:
ONE PLACE .10; +.030

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$

TWO PLACE	(.00)	±.010
THREE PLACE	(.000)	±.005
ANGLES		±

ANGLE

WEIGHT .08 LB APPROX