

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH

101TL255 SERIES CHART 1

CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CIRCUIT MADE WITH
TOGGLE LEVER IN 

MILITARY RATING (AMPS)

RESISTIVE LOAD
DC VOLTS AC VOLTS LAMP
LOAD INDUCTIVE
LOAD

28 125 250 125 250 28 VDC 125 VAC 28 VDC 125 VAC

20 75 5 15 6 5 3 15 10

(REFER TO L191 FOR UL RATING)

15 75 5 15 6 4 2 10 7

(REFER TO L192 FOR UL RATING)

CATALOG
LISTING

KEYWAY SIDE
(1-2)

CENTER
(1-2)

OPPOSITE KEYWAY
(2-3)

101TL255-1

ON

OFF

ON

101TL255-3

ON

NONE


ON

(A)

MOM ON


OFF

MOM ON




LOCKWASHER







LOCKING RING



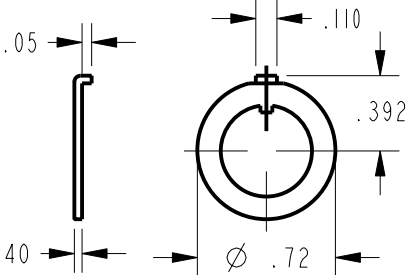

2X HEX NUT



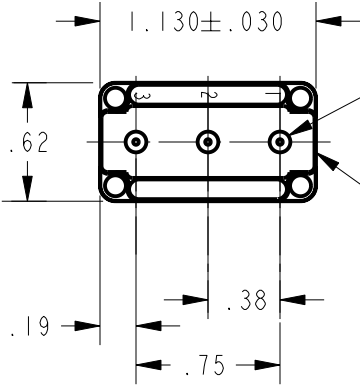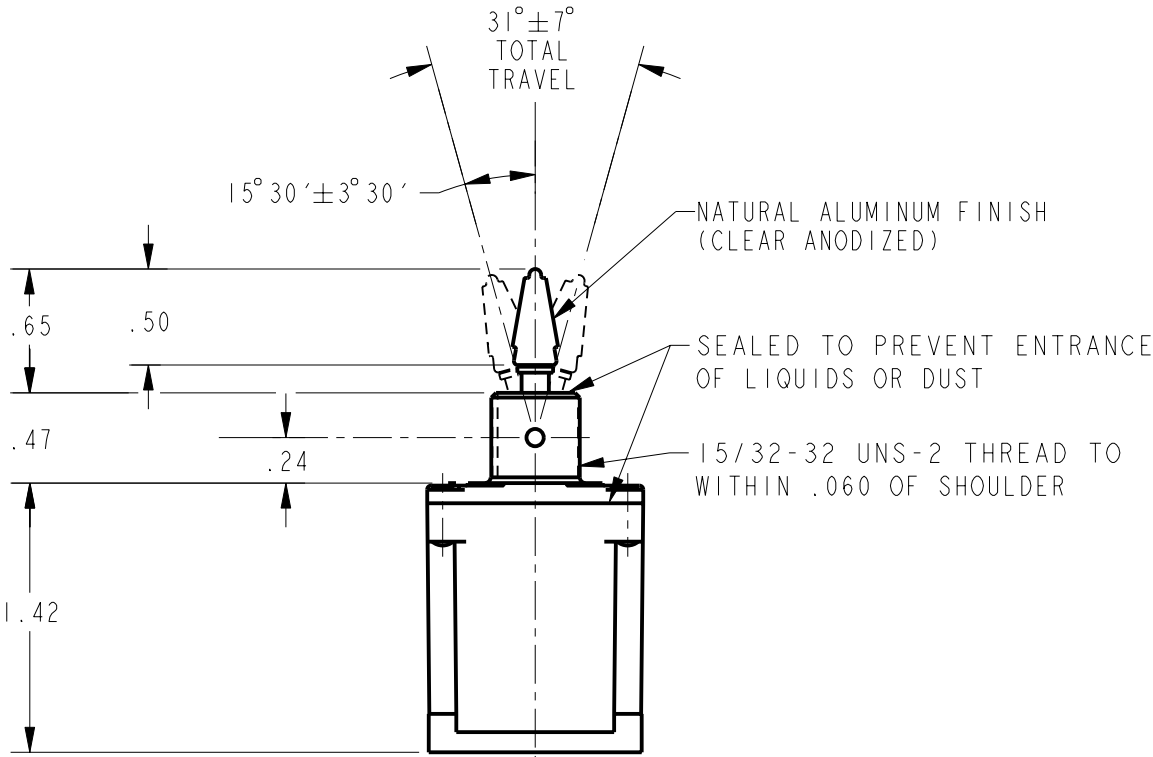

TERMINALS ACCEPT PIN
M39029/1-101 

SEALED CONSTRUCTION
(RED SEAL)

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F. CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION, MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
-  FURNISHED UNASSEMBLED
-  THE SEALING GROMMET SHALL SEAL ON A SMOOTH WIRE INSULATION OF .040 - .083 DIAMETERS (16-20 GAGE)
-  APPLIES TO "ON" AND "MOMENTARY ON" POSITIONS
-  UNUSED TERMINAL HOLES MAY BE SEALED WITH PLUGS M83723/28-20

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"




L192 10A 125, 250, 277 VAC
1/4HP 125 VAC
1/2HP 250, 277 VAC
3A 125 VAC "L"



ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .07 LB APPROX