
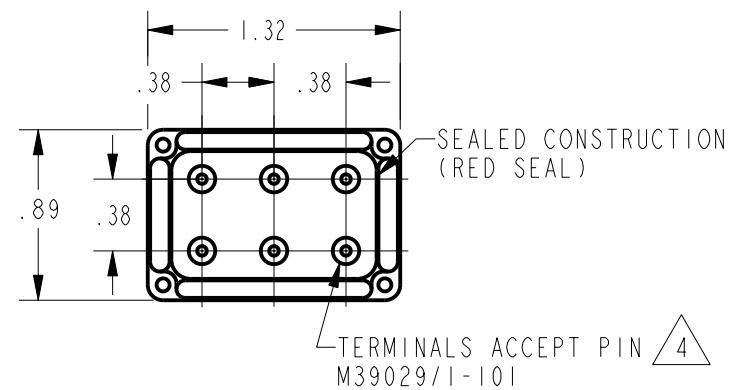
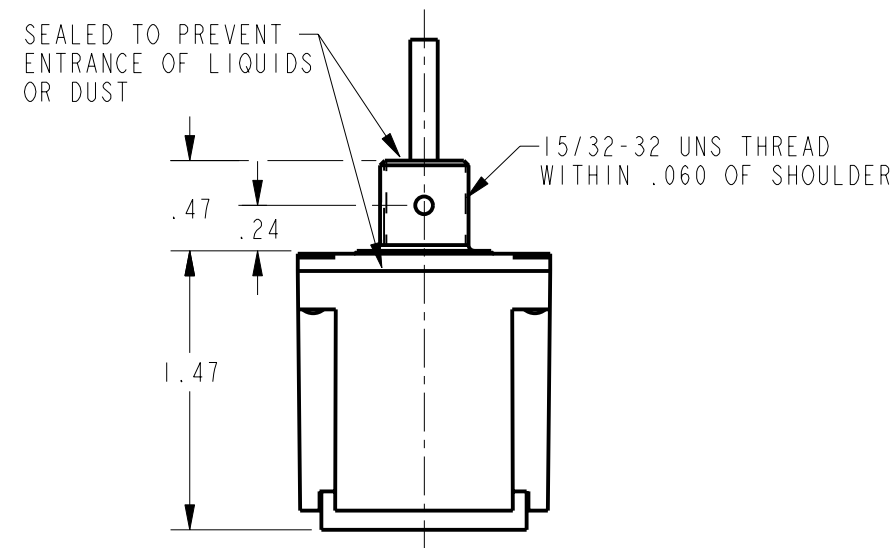


15/32-32 UNS
THREAD

.078

.56

2X HEX NUT $\triangle 3$

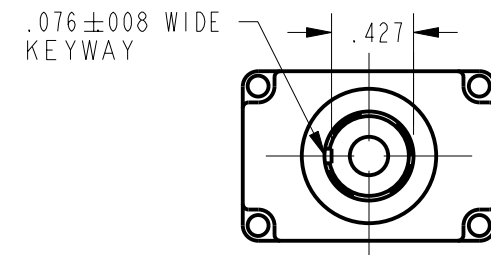

- NOTES

1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD

2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING
 ^ STAMPED ON SIDE OF SWITCH

3 STAMPED ON SIDE OF SW
FURNISHED UNASSEMBLED

4 THE SEALING GROMMET SHALL SEAL ON A SMOOTH WIRE INSULATION OF .040 - .083 Ø (16-20 GAGE)


5 APPLIES TO "ON" AND "MOMENTARY ON" POSITIONS

6 - UNUSED TERMINAL HOLES MAY BE SEALED WITH PLUGS M83723/28-20

7 - SWITCHES MEET THE APPLICABLE REQUIREMENTS OF MIL-S-3950

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	$\pm .030$
-----------	------	------------

TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$

ANGLES	†
--------	---

WEIGHT 17 LB MAX