



DUAL-IN-LINE SOCKETS

SERIES 110...105 • SURFACE MOUNT, GULL WING • OPEN FRAME





See page 130 for Insulator Details

- Socket pins feature closed end construction eliminating any solder wicking problems
- Gull wing terminals provide maximum strength and permit easy visual inspection of solder joints. Series 110 uses Mill-Max #1005 pins. See page 166 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

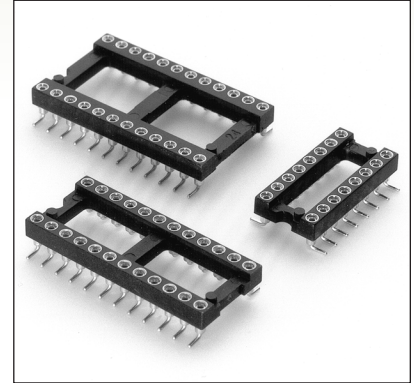

ORDERING INFORMATION

Total number of pins				Quantity per tube								
	A	B	C									
10	12,6	5,08	7,6	40	110-XX-210-41-105000							
4	5,0	7,62	10,1	102	110-XX-304-41-105000							
6	7,6	7,62	10,1	67	110-XX-306-41-105000							
8	10,1	7,62	10,1	50	110-XX-308-41-105000							
10	12,6	7,62	10,1	40	110-XX-310-41-105000							
14	17,7	7,62	10,1	28	110-XX-314-41-105000							
16	20,3	7,62	10,1	25	110-XX-316-41-105000							
18	22,8	7,62	10,1	22	110-XX-318-41-105000							
20	25,3	7,62	10,1	20	110-XX-320-41-105000							
22	27,8	7,62	10,1	18	110-XX-322-41-105000							
24	30,4	7,62	10,1	16	110-XX-324-41-105000							
28	35,5	7,62	10,1	14	110-XX-328-41-105000							
20	25,4	10,16	12,7	20	110-XX-420-41-105000							
22	27,8	10,16	12,7	18	110-XX-422-41-105000							
24	30,4	10,16	12,7	16	110-XX-424-41-105000							
28	35,5	10,16	12,7	14	110-XX-428-41-105000							
32	40,6	10,16	12,7	12	110-XX-432-41-105000							
24	30,4	15,24	17,7	32	110-XX-624-41-105000							
28	35,5	15,24	17,7	28	110-XX-628-41-105000							
32	40,6	15,24	17,7	24	110-XX-632-41-105000							
36	45,7	15,24	17,7	22	110-XX-636-41-105000							
40	50,8	15,24	17,7	20	110-XX-640-41-105000							
42	53,3	15,24	17,7	18	110-XX-642-41-105000							
48	60,9	15,24	17,7	16	110-XX-648-41-105000							
50	63,5	15,24	17,7	16	110-XX-650-41-105000							
52	66,0	15,24	17,7	14	110-XX-652-41-105000							
50	63,5	22,86	25,3	16	110-XX-950-41-105000							
52	66,0	22,86	25,3	14	110-XX-952-41-105000							
64	81,2	22,86	25,3	12	110-XX-964-41-105000							
See page 264 for coplanarity information					XX=Plating Code See Below						RoHS-2 2011/65/EU	
					SPECIFY PLATING CODE XX=		91	93			43	
					Sleeve (Pin)		5,08µm Sn/Pb		5,08µm Sn/Pb		5,08µm Sn	
					Contact (Clip)		0,25µm Au		0,76µm Au		0,76µm Au	



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com