





MICRO SWITCH
FREEPORT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
104EN81-6

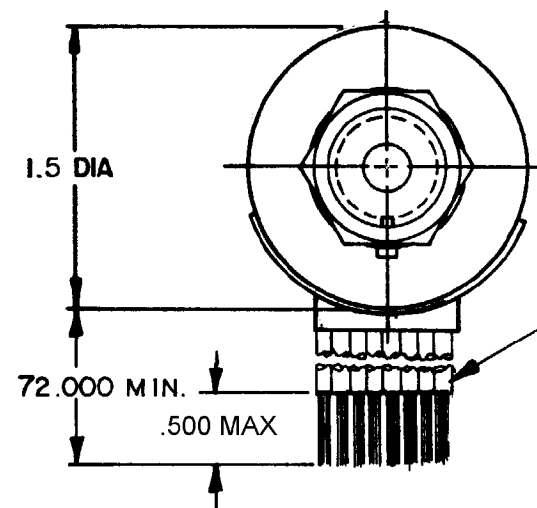

(8) NO. 18 WIRE LEAD PER MIL-W-22759/5
MARKED WITH CIRCUIT IDENTIFICATION AND
WIRE GAGE (1-18, 2-18 ETC) PER MIL-W-5088

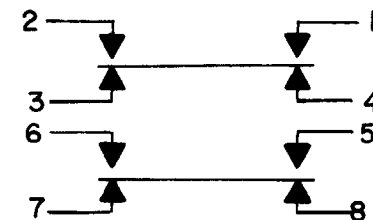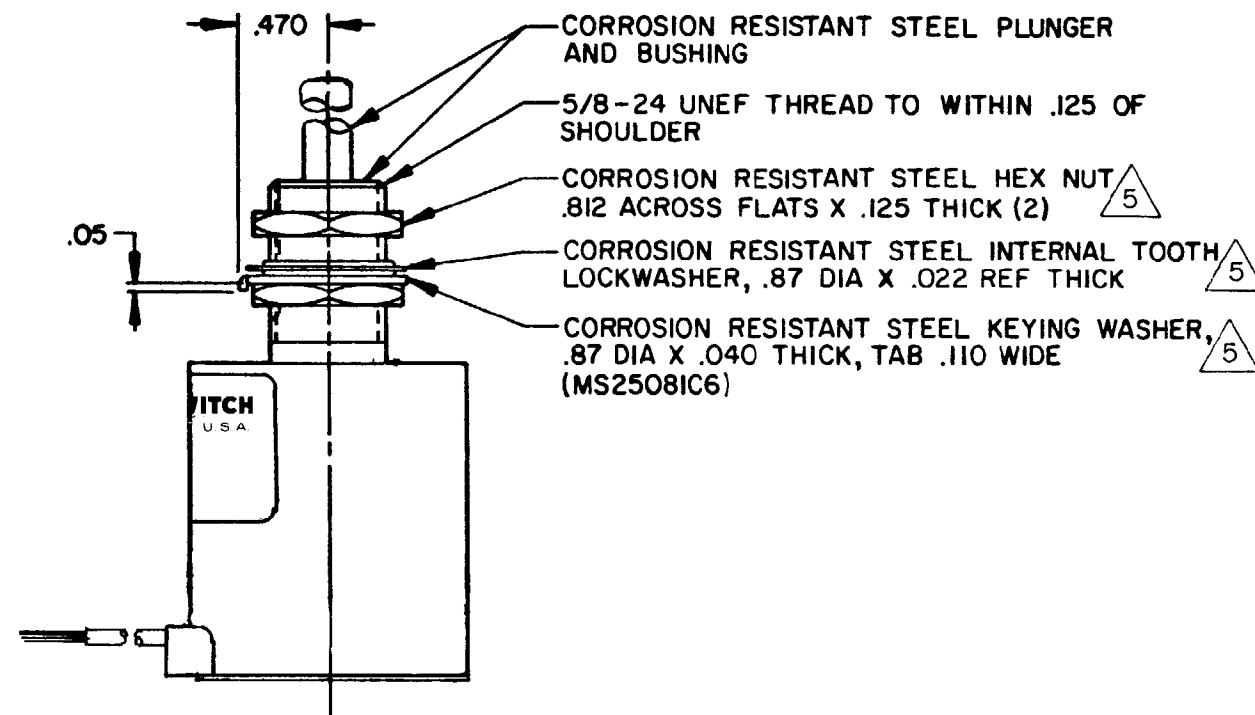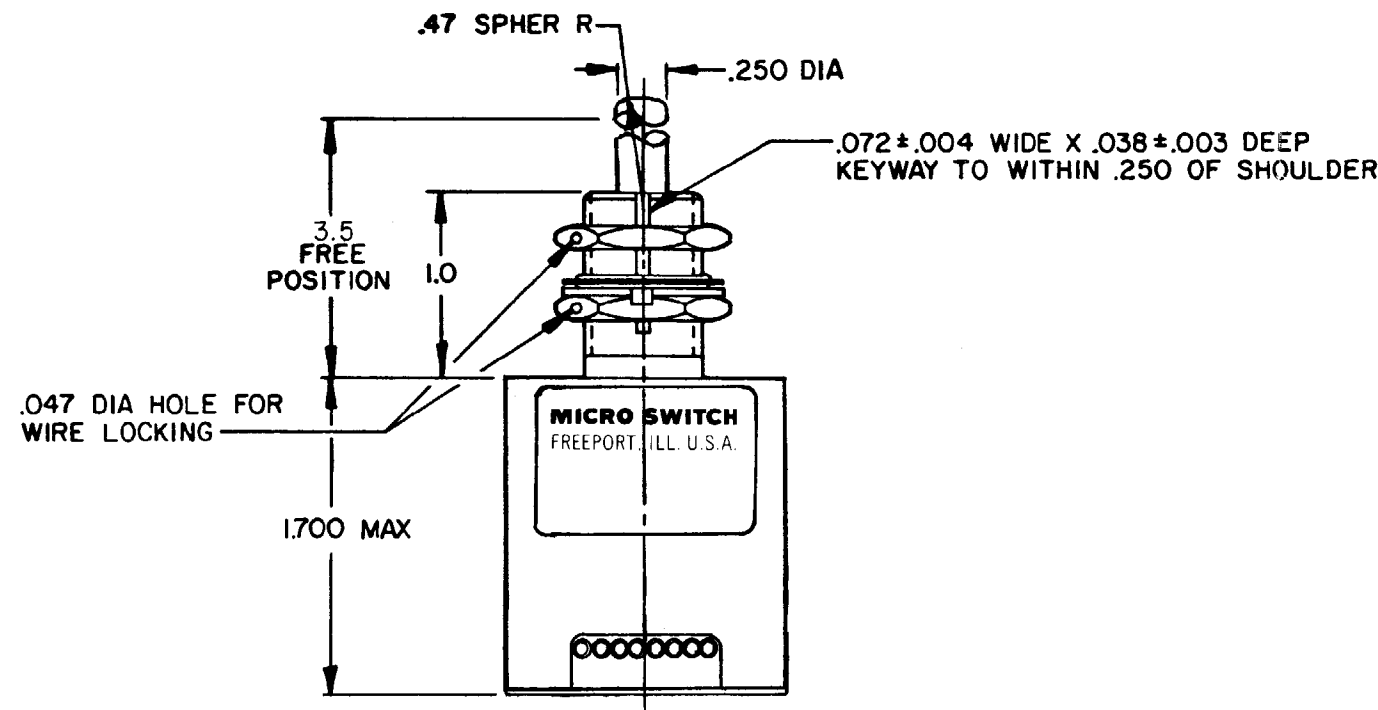

CIRCUIT DIAGRAM

CATALOG LISTING
104EN81-6
PAGE 1 OF 1

REPLACES
RELEASE NO. PR-14625

ISSUE
M
10

CHECK
12JUN08

REVISIONS

A	0046783	6 J W	7 NOV 79
B	0047488	085	24 MAR 80
C	0047488	RE-INST	24 MAR 86
D	0001334	CSL	8 SEP 03
E	0006683	ICC-AP	27 AUG 04
G	0040541	NR	12JUN08

RASTER
FO-8285 1-A
DRAWN
G J W 7 NOV 79

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION	SCALE FULL
DO NOT SCALE PRINT		TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:	
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE ——— 6 — 12 LB		CONTACT ARRANGEMENT SEE CIRCUIT DIAGRAM	
FULL OVERTRAVEL FORCE ——— 30 LB MAX		28 VDC	
RELEASE FORCE ——— 5 LB MIN		LOAD	
PRETRAVEL ——— .070 MAX		SEA LEVEL 50,000 FT.	
DIFFERENTIAL TRAVEL ——— .045 MAX		RES	15 15
OVERTRAVEL ——— .250 MIN		IND	10 10
		MOTOR	5
		LAMP	
		WEIGHT 16.5 OZ MAX	

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805, SYMBOL 4
 - 3 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 4 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805