


## 1090QA Series Non-Relampable Incandescent Indicator Lights

### Description and Features

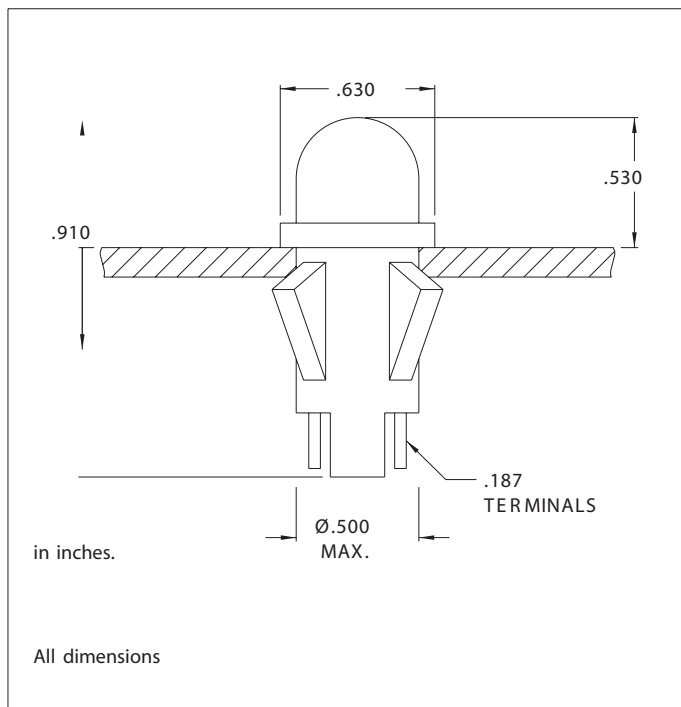

Mounting: Will snap-fit into Ø.500/.505 hole in panels  
.020/.100 thick. Push-on speednut SN0461  
also available. Mounting hole pattern on page SP2.

Terminals: Quick-connect, tinned brass

Lens: Polycarbonate

Bezel: Polished stainless steel. For black finish add "X"  
after the series letter(s).

Housing: White Nylon

| Lens Color | Incandescent       |                    |
|------------|--------------------|--------------------|
|            | Model No.<br>(12V) | Model No.<br>(28V) |
| Red        |                    |                    |
| Amber      |                    |                    |
| White      |                    |                    |
| Green      | 1090QA1-12V        | 1090QA1-28V        |
| Blue       | 1090QA3-12V        | 1090QA3-28V        |
|            | 1090QA4-12V        | 1090QA4-28V        |
|            | 1090QA5-12V        | 1090QA5-28V        |
|            | 1090QA6-12V        | 1090QA6-28V        |
| Lamp used  | #2162              | #2187              |

Underwriters Laboratories (UL) File No. E20325  
Canadian Standards Association (CSA) File No. LR13346