


HONEYWELL
PART NUMBER
111SM113-H58
PRODUCT CODE
TYJ5915

REV	DOCUMENT	CHANGED BY	CHECK
4	0038225	PRS 04APR08	BLR

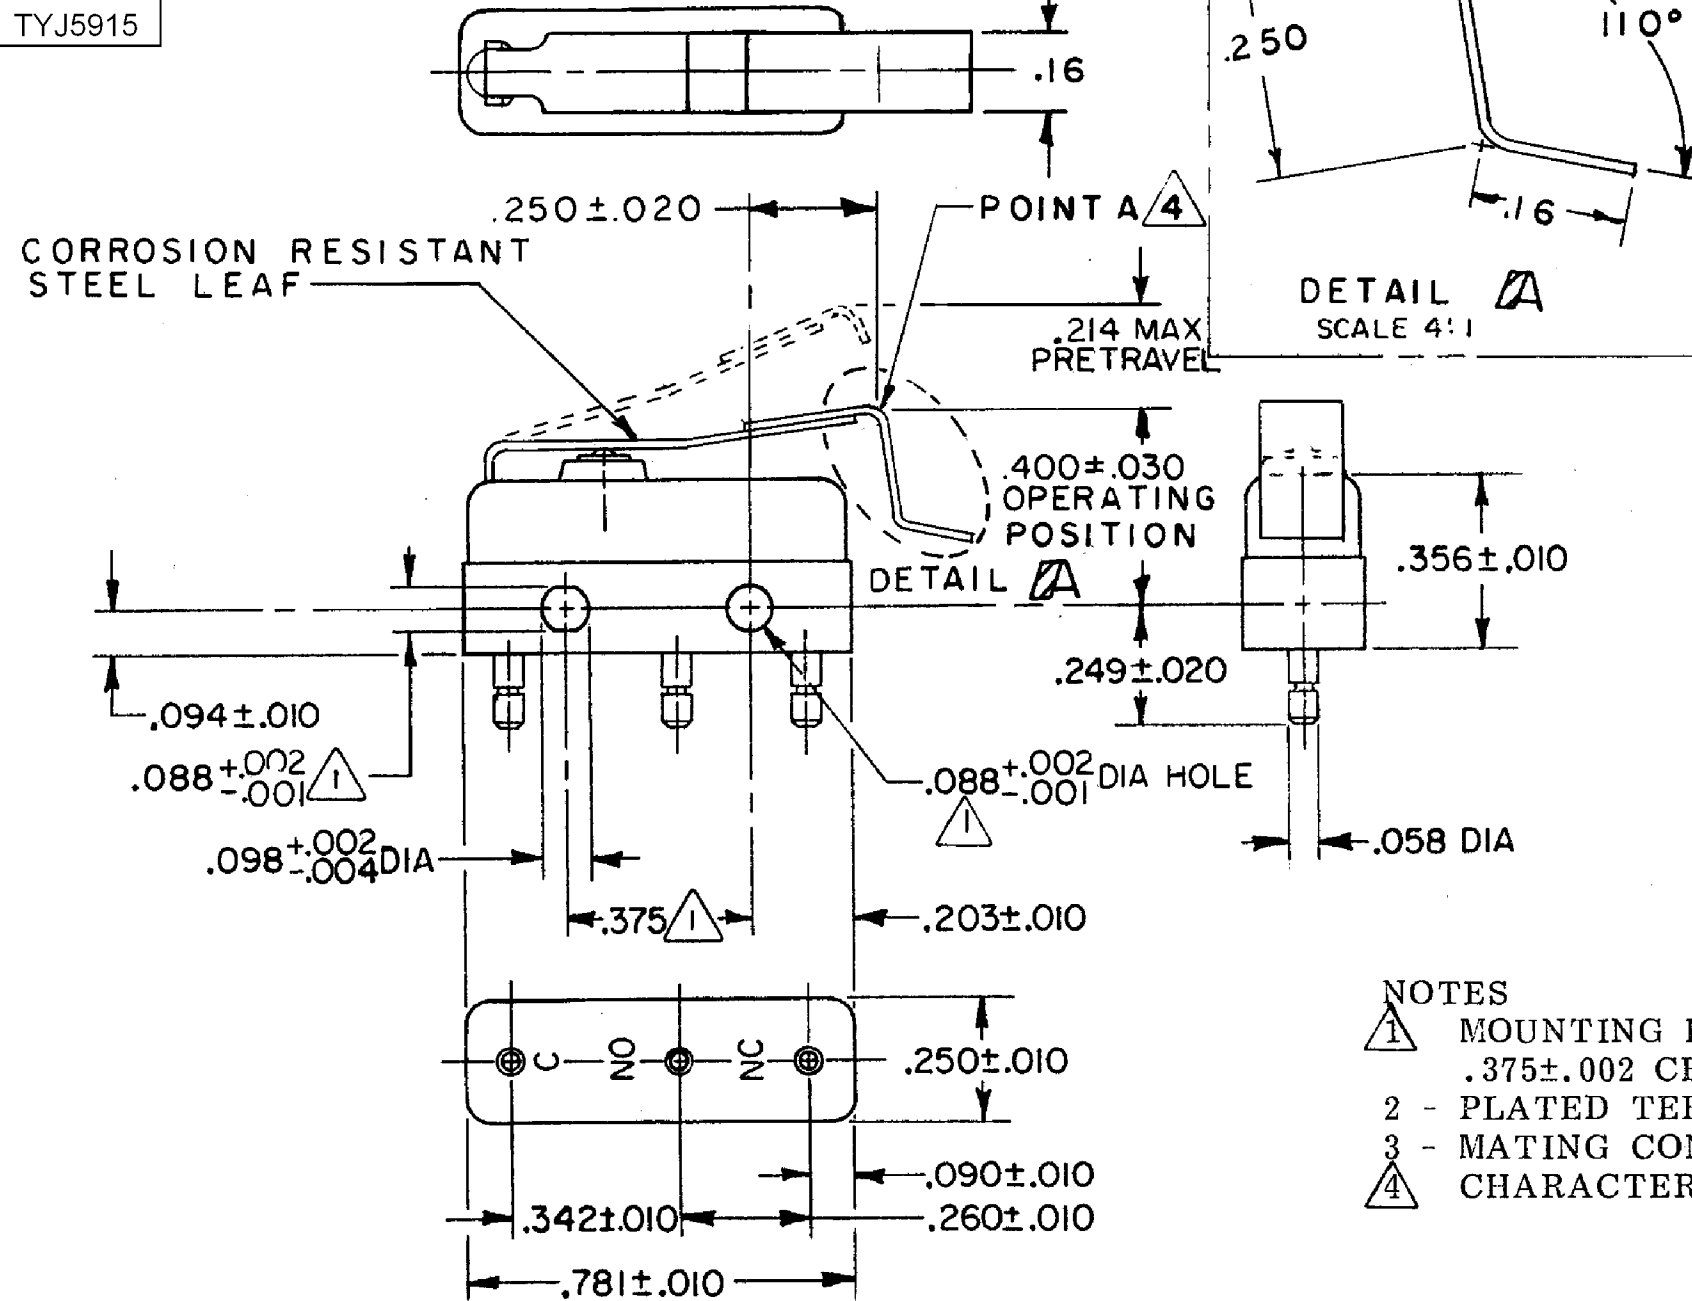

- NOTES
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - 2 - PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
 - 3 - MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY
 - ④ CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.	PR - 16329
REPLACES	-

CHARACTERISTICS	
OPERATING FORCE	--- 6 OZ MAX
RELEASE FORCE	--- 1 OZ MIN
DIFFERENTIAL TRAVEL	--- .050 MAX
OVERTRAVEL	--- .030 MAX

ELECTRICAL DATA		
CONTACT ARRANGEMENT SPDT		
30 VOLTS DC RATING		
	SEA LEVEL	50,000 FT
INDUCTIVE	1/2 AMP	1/2 AMP
RESISTIVE	1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP		
APPROVALS	KEMA, CE	1A, 250V ~ T85 1E4
	UL, CSA	1A, 125 VAC ~

DESIGN UNITS:	INCH
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	VK	26 OCT 07
CHECK	RJ	26 OCT 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	111SM113-H58	4
SCALE	WEIGHT	SHEET	1 OF 1