

Interfacing the DAC8814EVM to TMS470 Processors

Tom Hendrick

DAP Digital/Analog Converters

ABSTRACT

This application note presents a method for interfacing the DAC8814; a four channel, current output, 16-bit serial digital-to-analog converter to the TMS470R1B1M processor using the TMS-FET470R1B1M Kickstart Development Kit from IAR Systems. The software developed creates a 256 point sine table, and then continuously writes values from the sine table to the DAC8814. In an effort to reduce development time, the source code for this application note can be found on the Texas Instruments web site at <http://www.ti.com>. Search for document number [SLAA317](#) from the home page and follow the links to this application note.

Contents

1	Introduction	1
2	Hardware	1
3	DAC8814EVM.....	2
4	Software Interface	2
5	References	3

List of Figures

1	Basic Hardware Interface.....	2
2	Software Flow Chart.....	3

1 Introduction

The DAC8814 is a four channel, 16-bit Digital-to-Analog Converter (DAC), offering 2 mA full scale current output and a flexible 3-wire serial interface. The converter is able to gluelessly interface to the TMS470 series of Micro Controllers. For development of this application note, the TMS-FET470R1B1M Kickstart Development Kit along with the DAC8814EVM and HPA-MCU Interface Board were used to implement an SPI interface.

2 Hardware

The combination of the TMS-FET470R1B1M Kickstart Development Kit and the DAC8814EVM is a convenient way of experimenting with the TMS470 series micro controller and the DAC8814. The DAC8814EVM and TMS-FET470R1B1M Kickstart Development Kit carrier board can be plugged directly on to the HPA-MCU Interface Board to implement a serial peripheral interface to the TMS470R1B1M.

2.1 TMS-FET470R1B1M Kickstart Development Kit

The TMS-FET470R1B1M Kickstart Development Kit is a Third Party tool used for evaluation of the TMS470R1B1M device. The tool is available through the Texas Instruments website at www.ti-eStore.com.

3 DAC8814EVM

The DAC8814 is one of a series of Multiplying DACs with serial inputs available from Texas Instruments. The DAC8814EVM provides a platform to demonstrate the functionality of the DAC8814 device with various Texas Instruments DSP's and Micro Controllers, while allowing easy access to all analog and digital signals for customized end-user applications. For more information on the EVM, search for document number [SLAU184](#) from the main page of the Texas Instruments website at <http://www.ti.com>.

3.1 Hardware Interface

The hardware interface is a simple 3-wire serial connection between the DAC and one of the SPI ports of the TMS470R1B1M.

The hardware connections are shown in [Figure 1](#) via the TMS-FET470R1B1M Kickstart Development Kit. The CLK, \overline{CS} , and SDI pins from the DAC8814 are connected to SPISCLK, SPIMOSI, and SPISTE pins of the TMS470R1B1M. While this application note refers specifically to the TMS470R1B1M, any of the TMS470 family of micro controllers containing at least one SPI peripheral could be used.

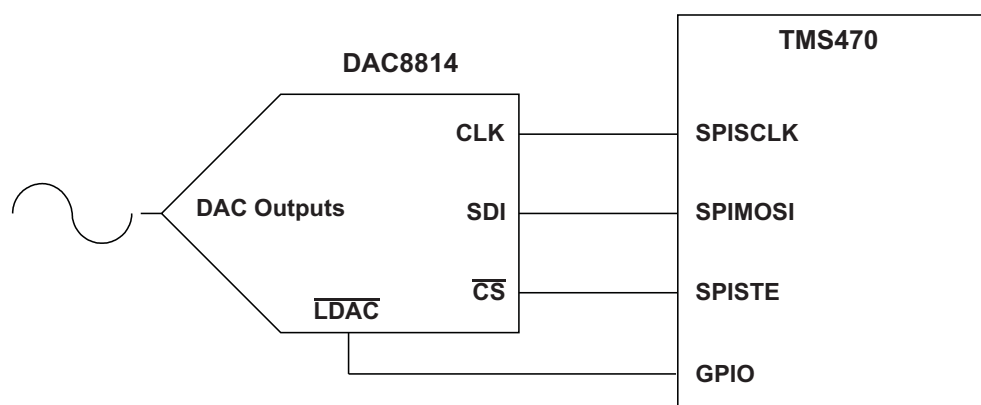


Figure 1. Basic Hardware Interface

4 Software Interface

The code archive associated with this application note ([SLAA317](#)) contains a workspace and associated project for the TMS470 KickStart version of Embedded Workbench from IAR Systems. Extract the archive to any convenient folder of your Embedded Workbench installation and locate the DAC8814 folder. Open the associated workspace and project, debug and run the code.

All of the software was written and compiled using IAR Embedded Workbench version 4.3. The most involved portion of writing the code for this interface is programming the serial peripheral interface (SPI).

4.1 SPI Settings

In the TMS-FET470R1B1M sample code, the DAC8814 is updated at a 1.2-MHz rate, with a serial clock of 30 MHz. The serial clock is set for CPOL = 0 and CPHA = 1 in order to maintain proper communication with the DAC8814.

The serial port is set for SPI master mode and configured for 9-bit transfers. A total of 18 SCLKS are required for proper DAC8814 operation. On each data transfer, 16-bit sine values are sent along to the DAC8803, with channel selection inserted in the two MSBs of the first data transfer. Each DAC output is updated with transmission of its particular channel data. To facilitate simultaneous updates, a GPIO could be used to toggle the \overline{LDAC} line after all four channels have been loaded with data.

4.2 Software Flow

The software presented in this application report creates a 256 point sine table. The software simply initializes the sine table then writes the values to the serial port. The main function initializes the sine values, enables the SPI port and then enters an endless loop. The values from the sine table transmitted to the DAC, creating four sine wave outputs on J1 of the EVM.

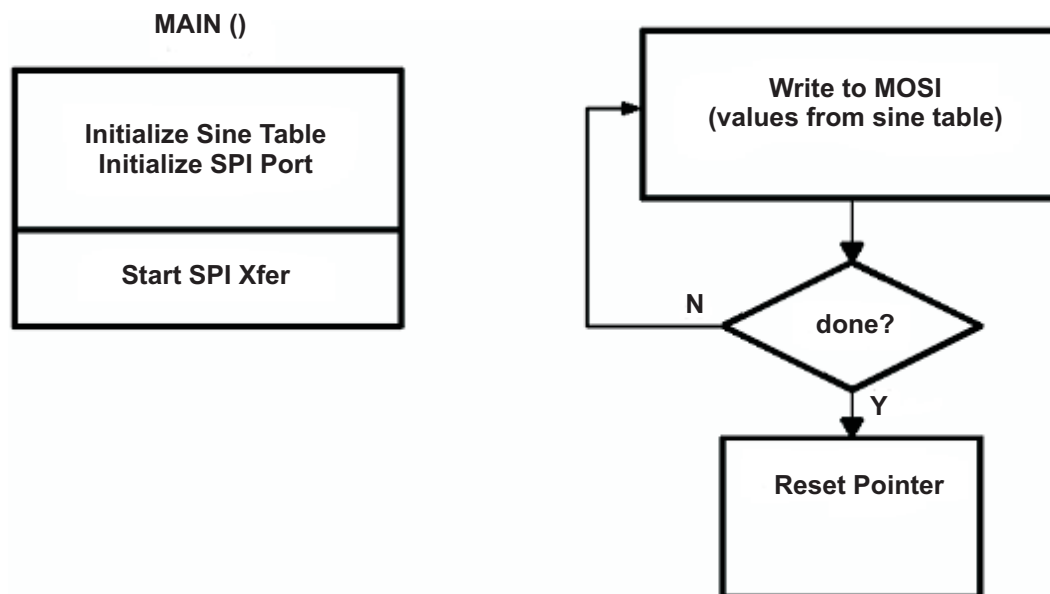


Figure 2. Software Flow Chart

5 References

1. DAC8814 Data Sheet ([SBAS338](#))
2. TMS470R1x Serial Peripheral Interface (SPI) Reference Guide ([SPNU195](#))
3. DAC8814EVM Users Guide ([SLAU184](#))
4. HPA-MCU Interface Board Users Guide ([SLAU106](#))
5. Designing Modular EVMs for Data Acquisition Products ([SLAA185](#))

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
Low Power Wireless	www.ti.com/lpw	Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated