


HONEYWELL PART NUMBER
111SM115-H58
PRODUCT CODE TYJ5920

REV	DOCUMENT	CHANGED BY	CHECK
5	0039671	KVB 08MAY08	BLR

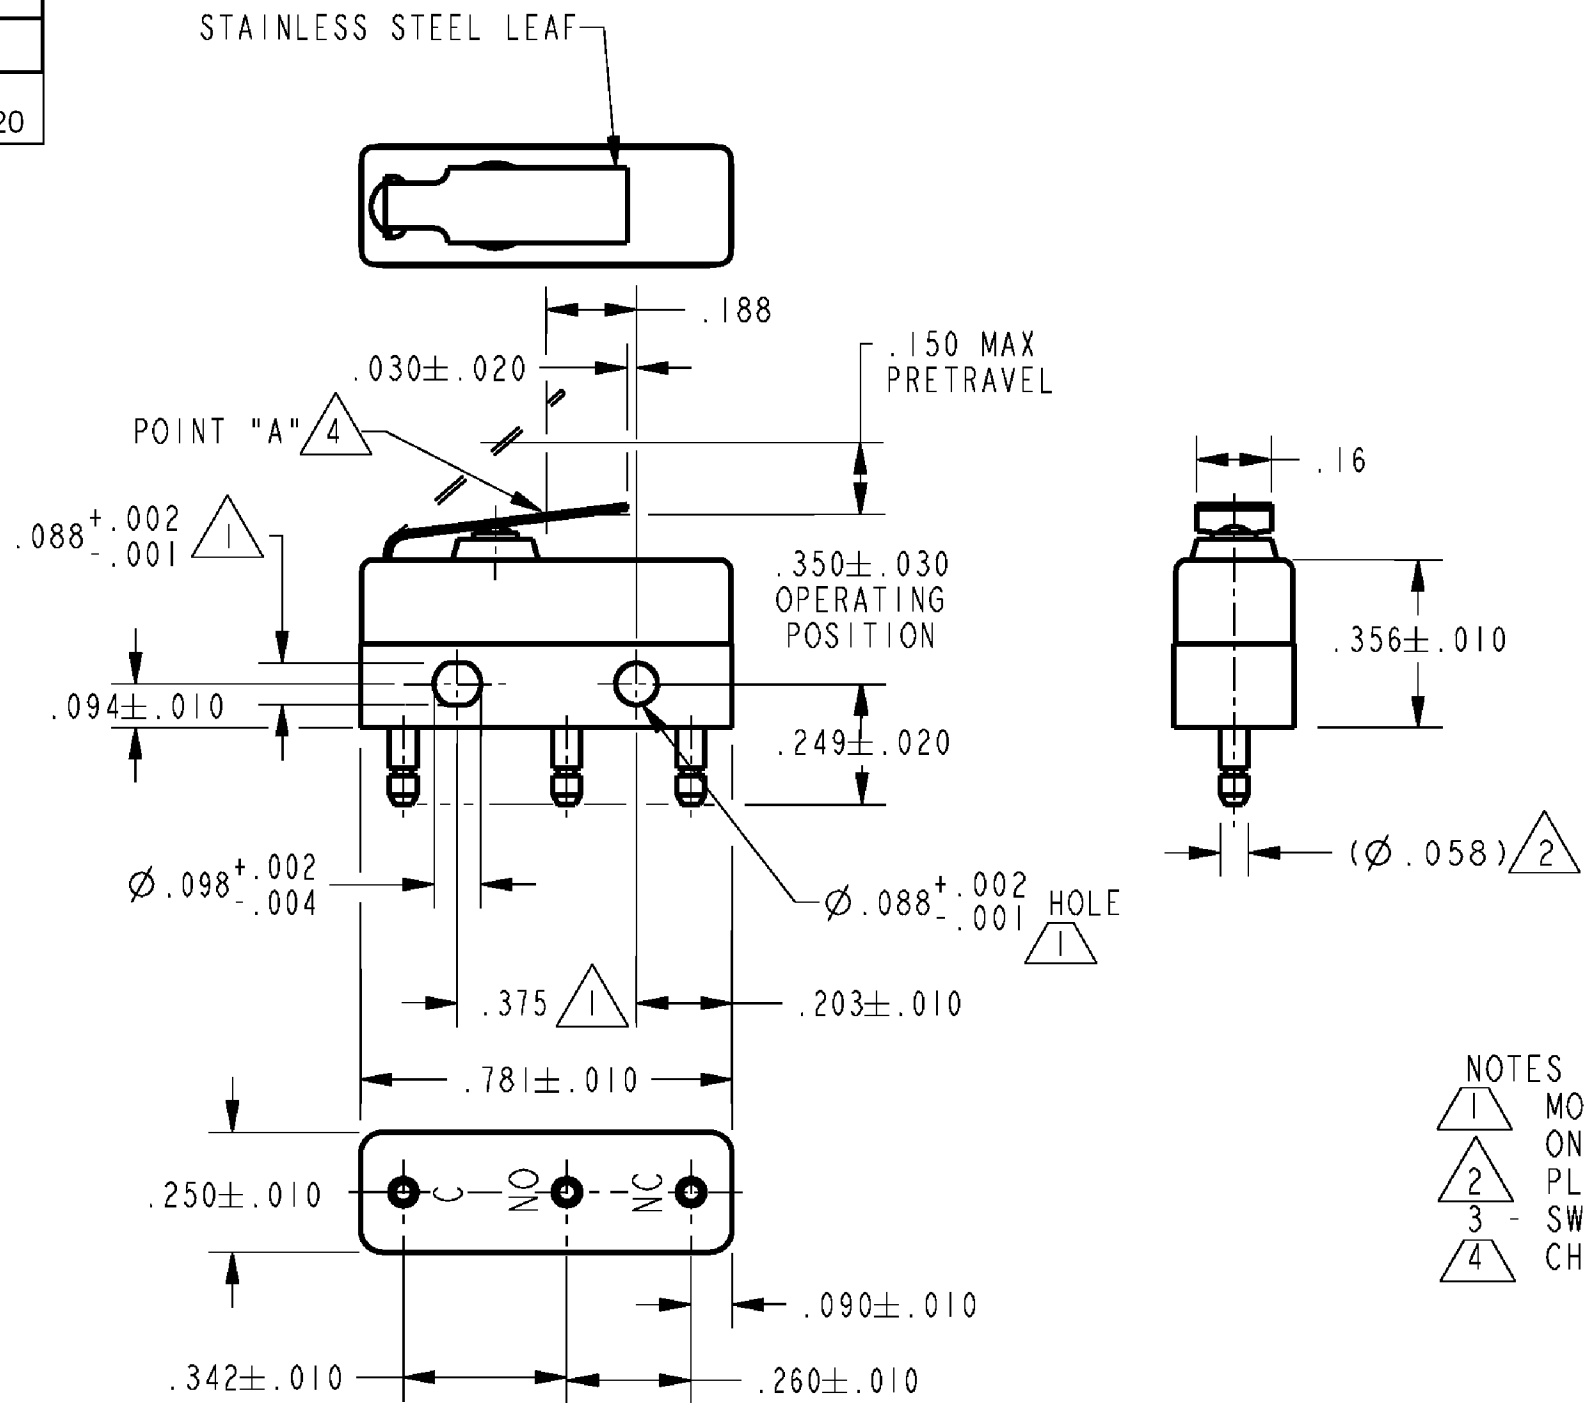

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375±.002 CENTERS
 - 2 PLATED TERMINALS WILL ACCEPT "AMP INC" Ø.058 PIN RECEPTACLES
 - 3 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 4 CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.	PR - 20240
REPLACES	X396037 - SM

CHARACTERISTICS 	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -		DRAWN	VK	26 OCT 07	Honeywell		
OPERATING FORCE - - - - 14 OZ MAX	CONTACT ARRANGEMENT SPDT					CHECK	RJ	26 OCT 07			
RELEASE FORCE - - - - 2 OZ MIN	30 VOLTS DC RATING					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SIZE TYPE DRAWING NAME REV B I 111SM115-H58 5		
DIFFERENTIAL TRAVEL - - - .020 MAX		SEA LEVEL	50,000 FT								
OVERTRAVEL - - - - .013 MIN	INDUCTIVE	3 AMP	2.5 AMP	THIRD ANGLE PROJECTION 							
	RESISTIVE	5 AMP	5 AMP								
	MAXIMUM INRUSH 24 AMP										
	APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4  								
		UL, CSA	5A, <u>250</u> VAC   BRAND L4								
		</									