

# ***350-W Interleaved PFC Pre-Regulator***

## *User's Guide*

# ***350-W Interleaved PFC Pre-Regulator***

## ***User's Guide***

Literature Number: SLUU228  
September 2005

# Contents

|           |                                                |           |
|-----------|------------------------------------------------|-----------|
| <b>1</b>  | <b>Introduction.....</b>                       | <b>6</b>  |
| <b>2</b>  | <b>Description.....</b>                        | <b>6</b>  |
| <b>3</b>  | <b>Thermal Requirements.....</b>               | <b>6</b>  |
| <b>4</b>  | <b>Electrical Specifications.....</b>          | <b>6</b>  |
| <b>5</b>  | <b>Schematic .....</b>                         | <b>7</b>  |
| <b>6</b>  | <b>Test Setup.....</b>                         | <b>8</b>  |
| <b>7</b>  | <b>Power Up/Power Down .....</b>               | <b>9</b>  |
| <b>8</b>  | <b>Performance Data .....</b>                  | <b>9</b>  |
| 8.1       | Input Ripple Current.....                      | 11        |
| 8.2       | Startup Characteristics .....                  | 12        |
| 8.3       | Line Dropout .....                             | 13        |
| 8.4       | Line Transient.....                            | 13        |
| 8.5       | 2-W Auxiliary Supply ( $V_{bias}$ ) .....      | 14        |
| <b>9</b>  | <b>Reference Design Assembly Drawing .....</b> | <b>15</b> |
| <b>10</b> | <b>Bill of Materials .....</b>                 | <b>16</b> |
|           | <b>Important Notices .....</b>                 | <b>20</b> |

---

## List of Figures

|    |                                                                                                |    |
|----|------------------------------------------------------------------------------------------------|----|
| 1  | Auxiliary Supply and PFC Control Circuitry .....                                               | 7  |
| 2  | PFC Pre-Regulator Power Stage .....                                                            | 8  |
| 3  | Test Setup .....                                                                               | 9  |
| 4  | Efficiency vs. Output Power.....                                                               | 10 |
| 5  | PF vs. Output Power.....                                                                       | 10 |
| 6  | Current THD vs. Output Power.....                                                              | 10 |
| 7  | Current Harmonics .....                                                                        | 10 |
| 8  | Current Harmonics .....                                                                        | 10 |
| 9  | Output Ripple Voltage at Full Load .....                                                       | 11 |
| 10 | Input Current and Inductor Currents .....                                                      | 11 |
| 11 | $V_{IN} = 85 \text{ V RMS}$ , $P_{OUT} = 350 \text{ W}$ .....                                  | 12 |
| 12 | $V_{IN} = 265 \text{ V RMS}$ , $P_{OUT} = 350 \text{ W}$ .....                                 | 12 |
| 13 | Start-Up at $V_{IN} = 120 \text{ V}$ , $P_{OUT} = 350 \text{ W}$ .....                         | 12 |
| 14 | Start-Up at $V_{IN} = 120 \text{ V}$ , $P_{OUT} = 0 \text{ W}$ .....                           | 12 |
| 15 | $V_{IN} = 120 \text{ V}$ , $P_{OUT} = 350 \text{ W}$ .....                                     | 13 |
| 16 | Line Transient, $P_{OUT} = 350 \text{ W}$ .....                                                | 13 |
| 17 | Auxiliary Gate Drive and Current Sense Behavior at No Load.....                                | 14 |
| 18 | Auxiliary Output with 2-W Load, Gate Drive and Current Sense, $V_{OUT1} = 120 \text{ V}$ ..... | 14 |
| 19 | Auxiliary Output with 2-W Load, Gate Drive and Current Sense, $V_{OUT1} = 380 \text{ V}$ ..... | 15 |
| 20 | Top Assembly Layer .....                                                                       | 15 |
| 21 | Bottom Assembly Layer .....                                                                    | 16 |

---

## List of Tables

|   |                          |    |
|---|--------------------------|----|
| 1 | EVM Specifications ..... | 6  |
| 2 | Parts List .....         | 16 |

## **350-W Interleaved PFC Pre-Regulator**

---



---



---

### **1 Introduction**

The evaluation module is a 350-W, two phase interleaved power factor corrected pre-regulator. This evaluation module has a 380-V, 350-W, dc output that operates off a universal input of (85 V to 265 V RMS) and provides power factor correction. The unit meets EN61000-3-2 class B input current harmonic specifications.

### **2 Description**

The pre-regulator uses the UCC28528 PFC/PWM combination controller to shape the input current wave to provide power factor correction. This device also controls a 2-W auxiliary bias supply that can be used to control external circuitry. The UCC28220 interleaved PWM provides OVP protection and provides load sharing between the two interleaved boost converters.


### **3 Thermal Requirements**

1. The evaluation module works up to 200 W without external cooling.
2. If the unit is to be run over 200 W, it requires a fan pointed directly at the converter heat sinks.
3. It is important to keep the ambient temperature around the components below 40°C.

### **4 Electrical Specifications**

**Table 1. EVM Specifications**

|                  | Parameter                 | Test Conditions | Min | Typ | Max | Unit             |
|------------------|---------------------------|-----------------|-----|-----|-----|------------------|
| V <sub>IN</sub>  | Line input voltage        |                 | 85  |     | 265 | V <sub>RMS</sub> |
| P <sub>OUT</sub> | Output power              |                 | 25  |     | 350 | W                |
|                  | Efficiency                | 350 W           | 90% |     |     |                  |
| V <sub>OUT</sub> | Output voltage            |                 | 375 | 380 | 400 | V                |
| THD              | Total harmonic distortion | 350 W           |     |     | 10% |                  |

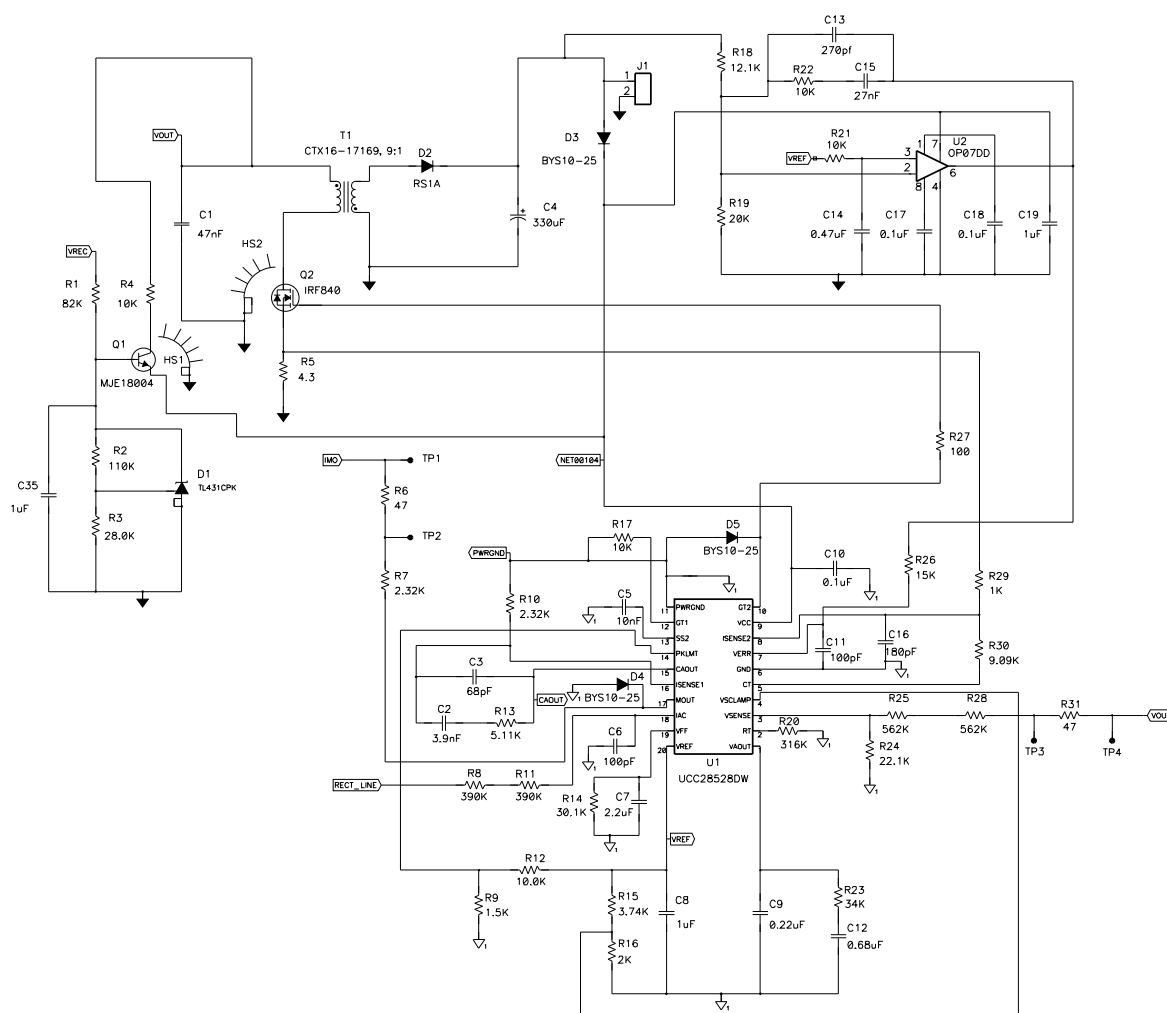

## Test Setup

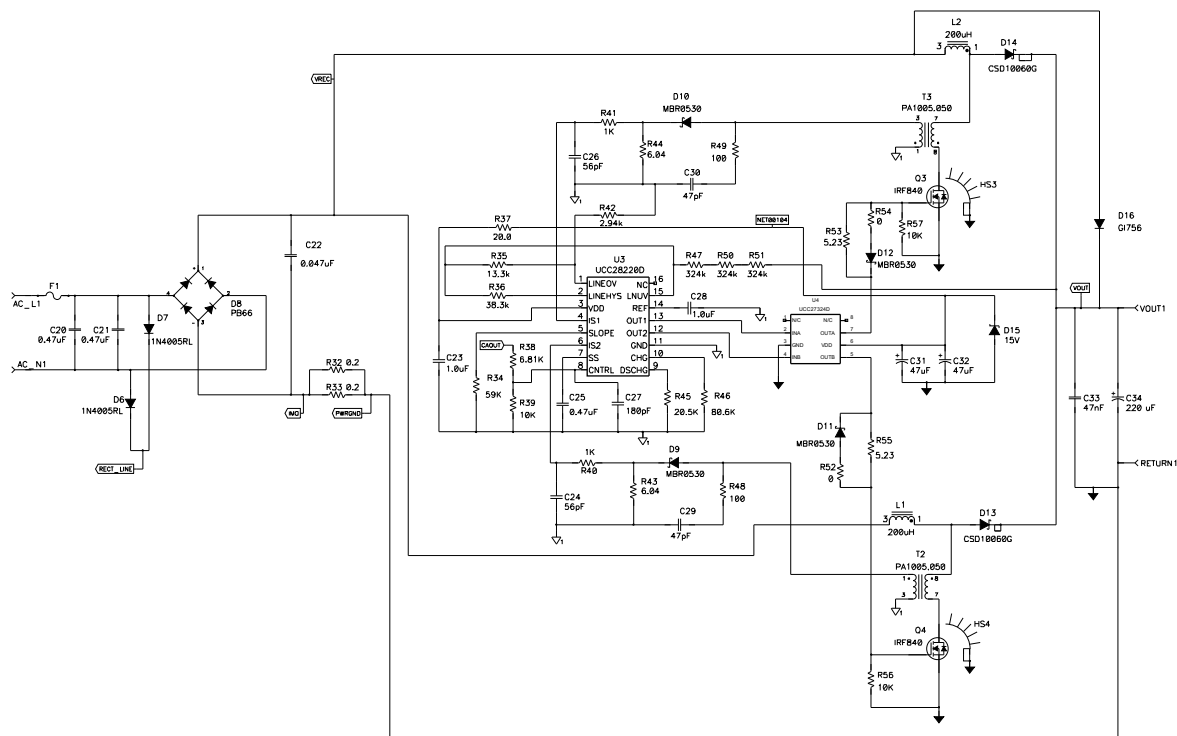


Figure 2. PFC Pre-Regulator Power Stage

## 6 Test Setup

There are high voltages present on the pre-regulator and it should only be handled by experienced power supply professionals. To evaluate this board as safely as possible the following test set up should be used. An isolation transformer should be connected between the source and unit. Before power is supplied, a volt meter and a resistive or electronic load should be attached to the unit's output.

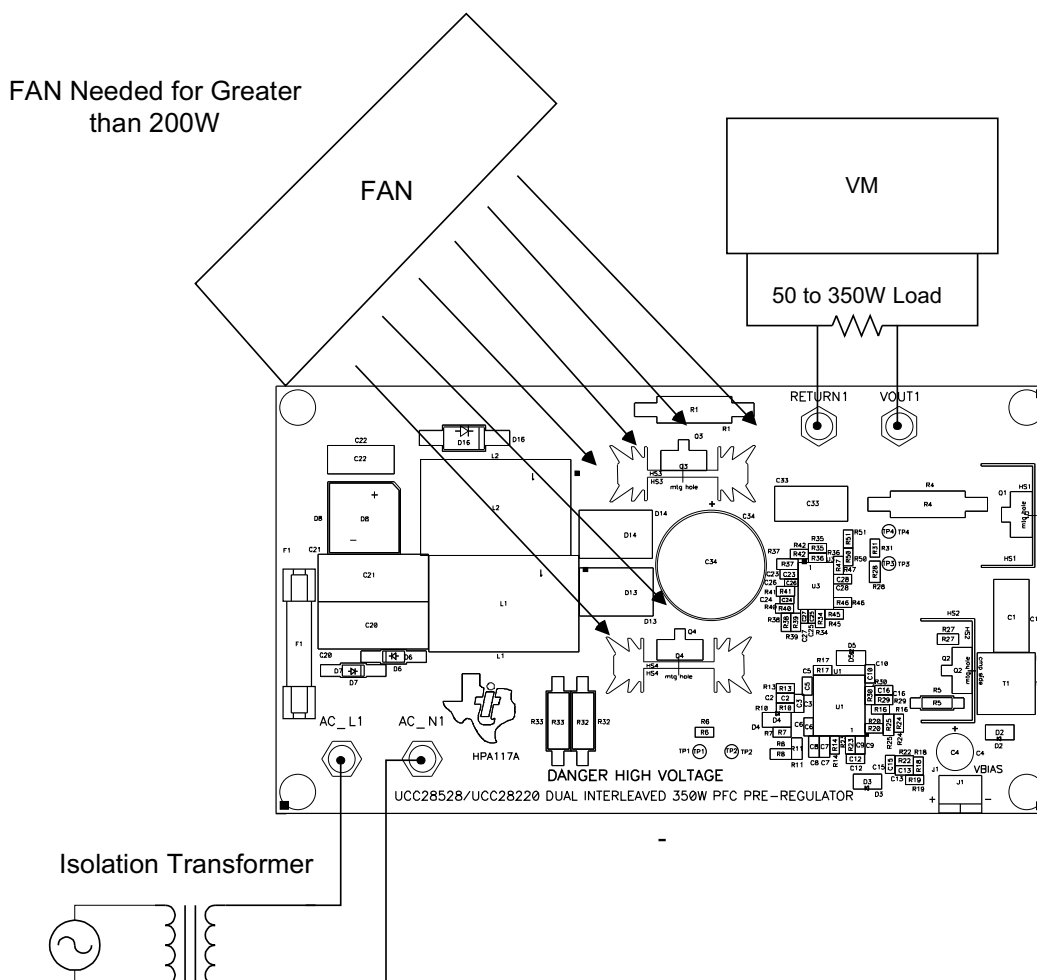


Figure 3. Test Setup

## 7 Power Up/Power Down


The unit will start up under no load conditions. However, for safety a load should be connected to the output of the device before it is powered up. The unit should also never be handled when power is applied to it or the output voltage is above 50V DC.

### WARNING


There are very high voltages on the board and components can and do reach temperatures above 50°C so precautions must be taken in handling the board.

## 8 Performance Data


The efficiency of the boost pre-regulator is greater than 91% at 20% load. This converter in a normal system would be followed by a step down converter. The new +80 initiative requires the cascaded power supply be 80% efficient at 20% load. This can be accomplished by having the downstream converter being 90% efficient or greater. In high power applications, this can be accomplished with zero voltage switching (ZVS). An active clamp forward using a UCC2894 PWM or a phase shifted full bridge using the UCC2895 PWM could be used to design a step-down converter with greater than 90% efficiency for high power applications.

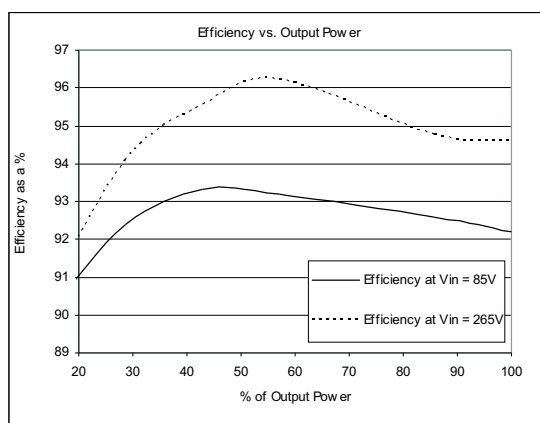


**Figure 4. Efficiency vs. Output Power**

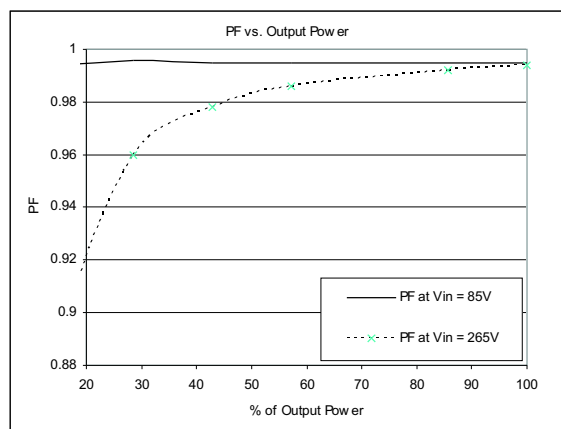


**Figure 5. PF vs. Output Power**

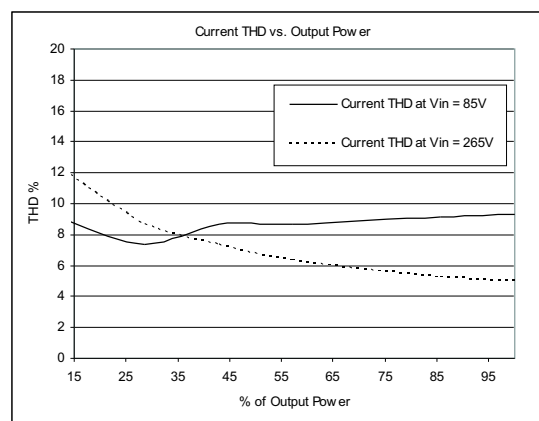

**Figure 6. Current THD vs. Output Power**

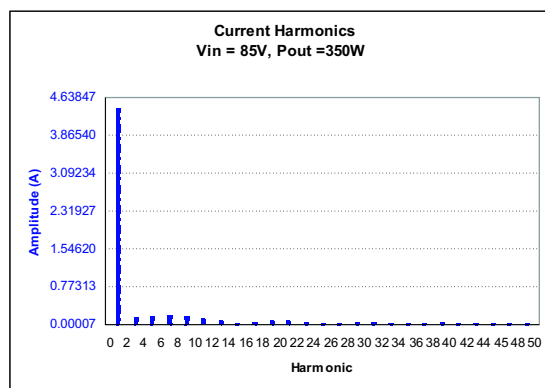

**Figure 7. Current Harmonics**

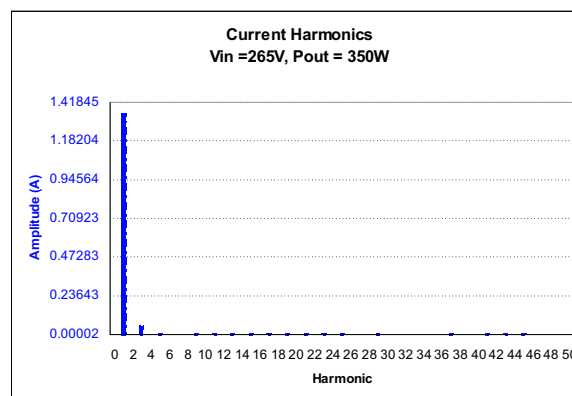

**Figure 8. Current Harmonics**

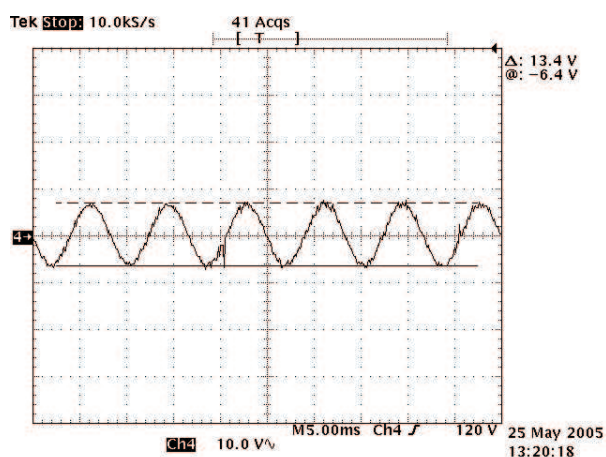


Figure 9. Output Ripple Voltage at Full Load

### 8.1 Input Ripple Current

Figure 10 shows that the inductor currents cancel each other out leaving the input current wave form clean. CH1 is the rectified line voltage, Ch2 is the inductor current from L1, CH3 is the inductor current of L2, Ch4 is the converter input current; CH1 is the rectified line voltage. Note the conversion ratio for the current waveform is 200 mA/mV.

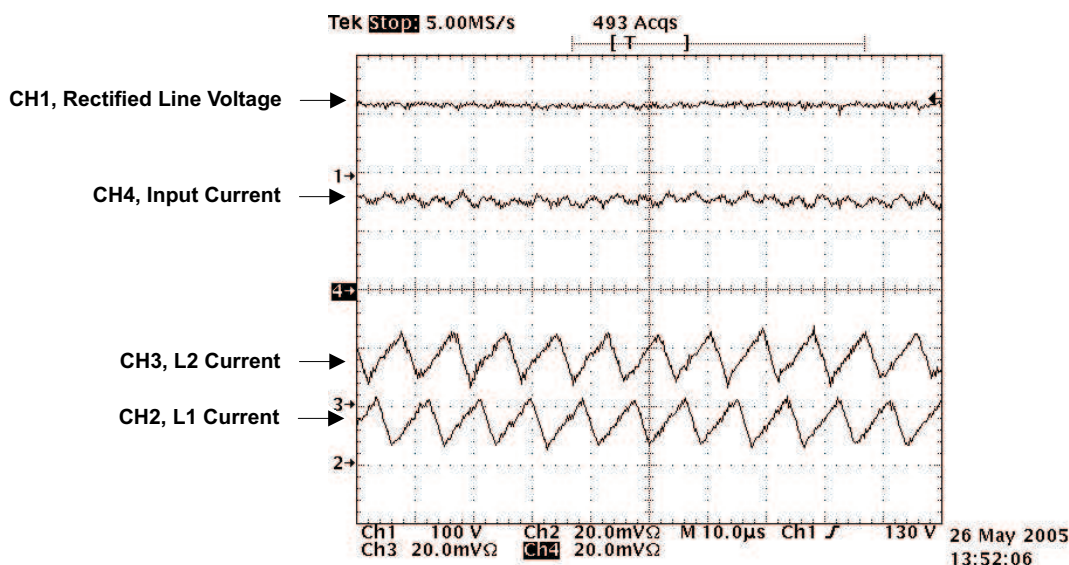


Figure 10. Input Current and Inductor Currents

Figure 11 and Figure 12 show the rectified line voltage (CH1), input current (CH4), and L1 and L2 inductor currents CH2 and CH3 respectively, at maximum load with different line conditions. From these waveforms, it can be observed that the inductor ripple currents are canceling each other out due to the interleaving.

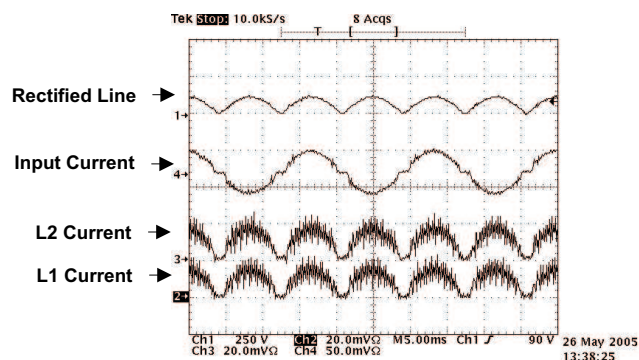


Figure 11.  $V_{IN} = 85 \text{ V RMS}$ ,  $P_{OUT} = 350 \text{ W}$

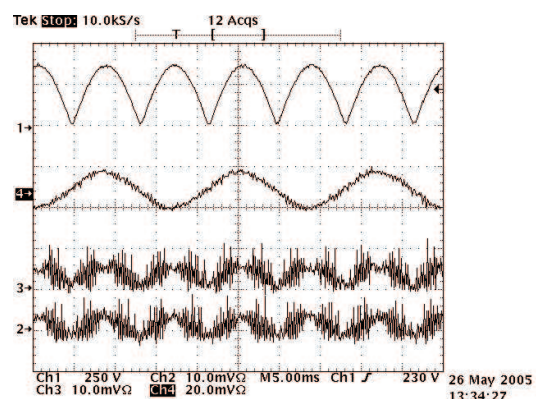


Figure 12.  $V_{IN} = 265 \text{ V RMS}$ ,  $P_{OUT} = 350 \text{ W}$

## 8.2 Startup Characteristics

PFC pre-regulators have a tendency to overshoot during power up. This is due to the voltage loop crossing over at 10 Hz. However, the UCC28528 uses a slew rate comparator that speeds up transient response and reduces overshoot. Figure 13 and Figure 14 show the startup behavior of the EVM at 120-V RMS input at maximum and no load conditions. CH4 is the output voltage and CH3 is the input current. From these figures, it can be observed that there is very little overshoot during startup.

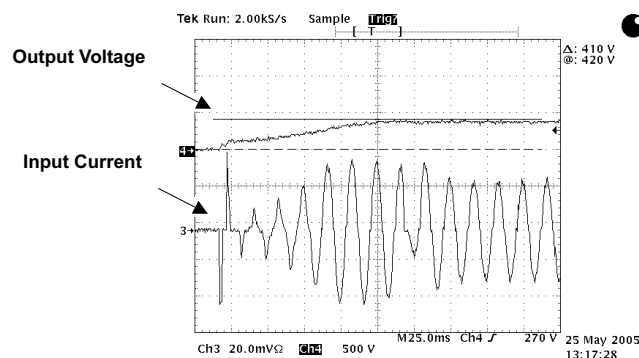


Figure 13. Start-Up at  $V_{IN} = 120 \text{ V}$ ,  $P_{OUT} = 350 \text{ W}$

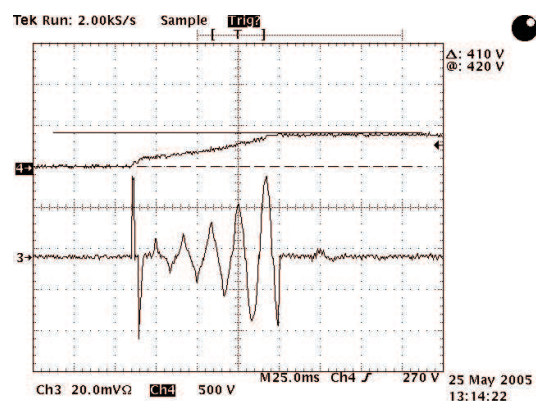


Figure 14. Start-Up at  $V_{IN} = 120 \text{ V}$ ,  $P_{OUT} = 0 \text{ W}$

### 8.3 Line Dropout

The unit was tested under a line dropout condition and the unit came back into regulation within 100 ms. Refer to [Figure 15](#) for details. CH1 is the rectified input voltage and CH2 is the output voltage.

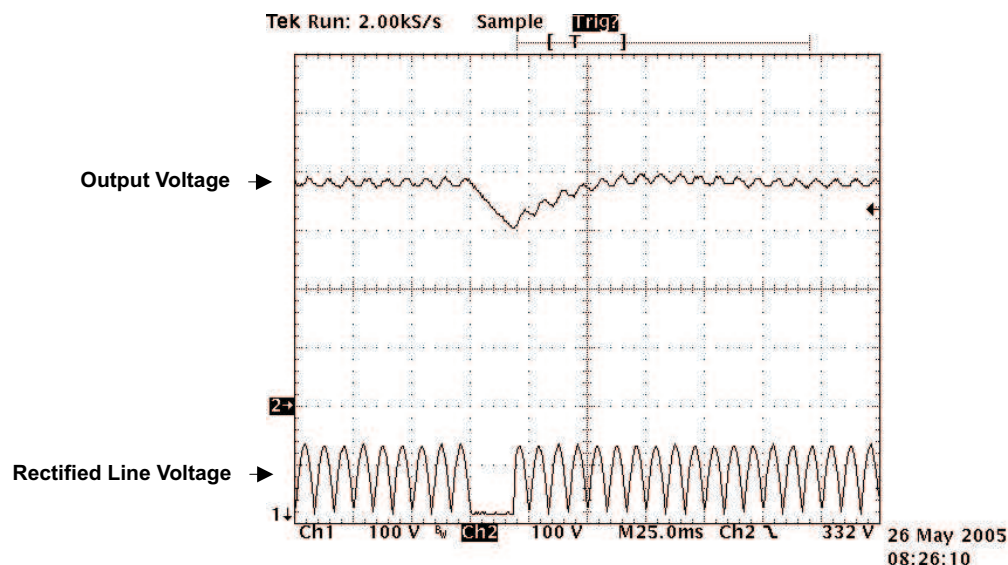


Figure 15.  $V_{IN} = 120\text{ V}$ ,  $P_{OUT} = 350\text{ W}$

### 8.4 Line Transient

A line transient test was conducted with an ac source on the reference design. The line was varied from 120 to 240-V RMS and the transient response was evaluated. From the oscilloscope output shown in [Figure 16](#) it can be observed that the output recovered within 200 ms.

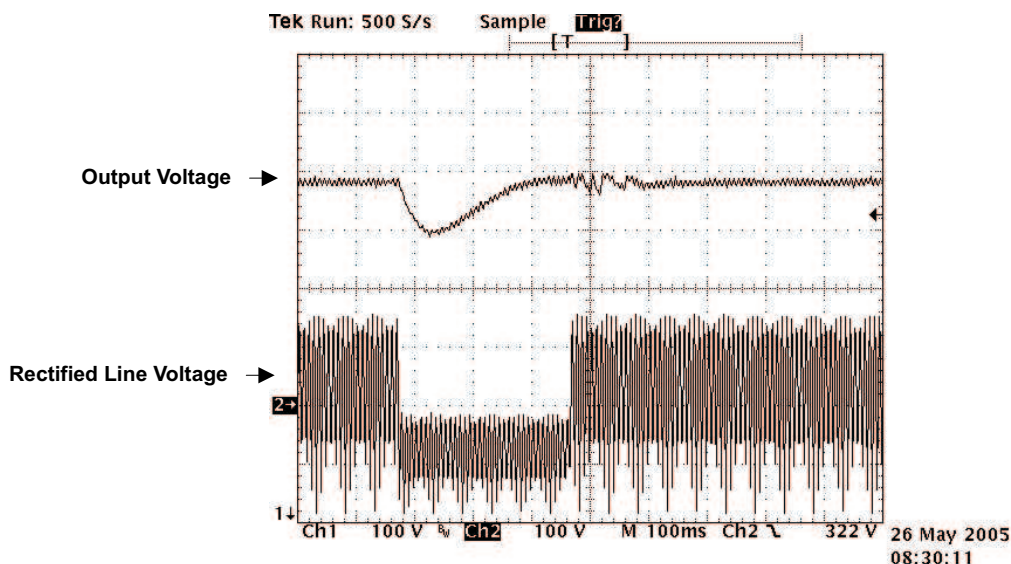


Figure 16. Line Transient,  $P_{OUT} = 350\text{ W}$

## 8.5 2-W Auxiliary Supply ( $V_{bias}$ )

The unit has a 2-W auxiliary bias supply that was designed to operate with a boost voltage ( $V_{OUT1}$ ) of 120 V to 400 V. This bias supply is based on a flyback converter and also regulates the PWM/PFC and gate drive circuitry of the evaluation module. Note when  $V_{BIAS}$  is not loaded, the gate drive of the flyback is pulse skipping. Once  $V_{AUX}$  has been loaded, the gate drive has a fixed duty cycle. Refer to [Figure 17](#), [Figure 18](#), and [Figure 19](#) for details.

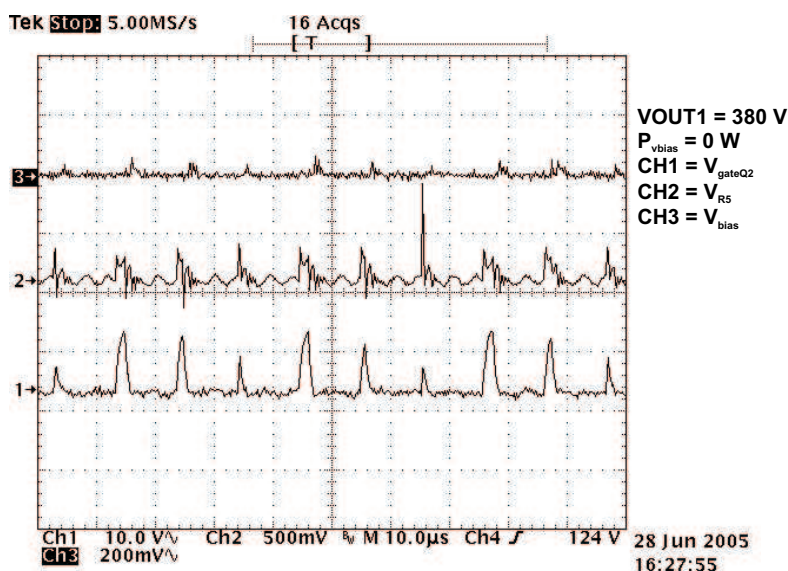


Figure 17. Auxiliary Gate Drive and Current Sense Behavior at No Load

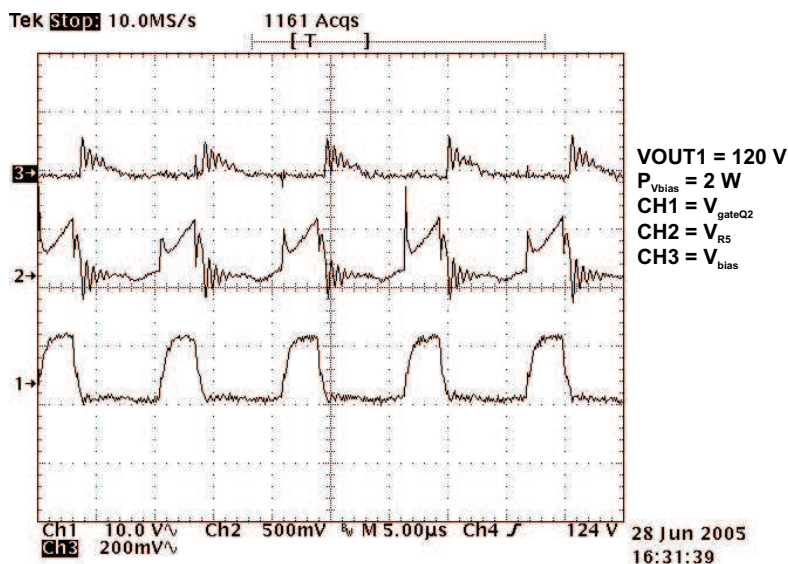


Figure 18. Auxiliary Output with 2-W Load, Gate Drive and Current Sense,  $V_{OUT1} = 120$  V

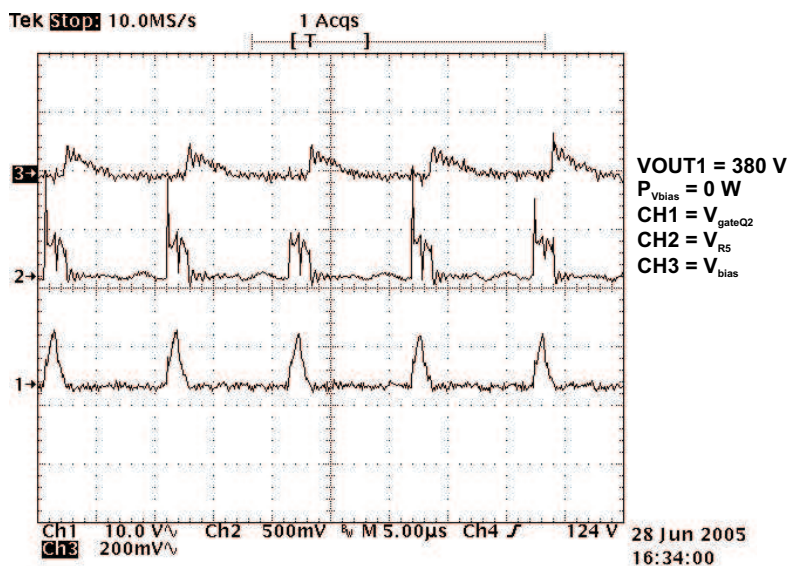


Figure 19. Auxiliary Output with 2-W Load, Gate Drive and Current Sense, VOUT1 = 380 V

## 9 Reference Design Assembly Drawing

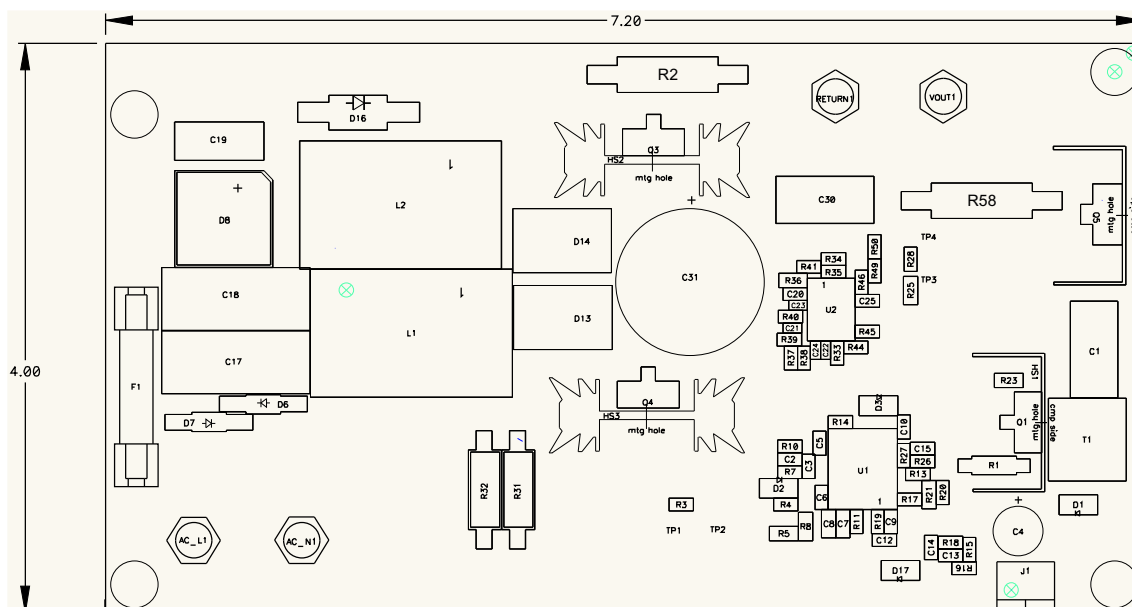


Figure 20. Top Assembly Layer

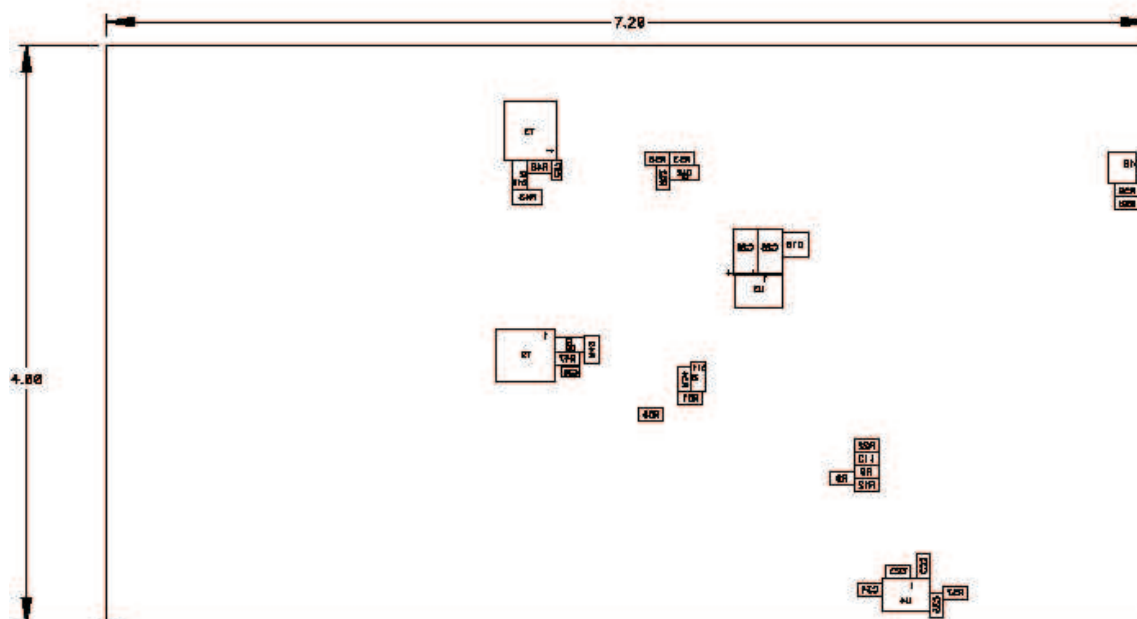


Figure 21. Bottom Assembly Layer

## 10 Bill of Materials

Table 2. Parts List

| Ref Des               | Count | Description                                                                             | MFR       | Part Number     |
|-----------------------|-------|-----------------------------------------------------------------------------------------|-----------|-----------------|
| AC_L1,<br>VOUT1       | 0     | Connector, binding post, insulated, for standard banana plug, red, 15 A, 0.425 dia In   | Johnson   | 111-0702-001    |
| AC_N1,<br>RETURN1     | 0     | Connector, binding post, insulated, for standard banana plug, black, 15 A, 0.425 dia In | Johnson   | 111-0703-001    |
| C1, C33               | 2     | Capacitor, polyester, .047 $\mu$ F, 630 V, 10%, 0.256 x 0.650                           | Panasonic | ECQ-E6473KZ     |
| C10, C17,<br>C18      | 3     | Capacitor, ceramic, 0.1 $\mu$ F, 50 V, X7R, 10%, 0805                                   | Panasonic | ECJ-2YB1H104K   |
| C12                   | 1     | Capacitor, ceramic, 0.68 $\mu$ F, 16 V, X7R, 10%, 0805                                  | std       | std             |
| C13                   | 1     | Capacitor, ceramic, 270 pF, 50 V, X7R, 10%, 0805                                        | std       | std             |
| C14                   | 1     | Capacitor, ceramic, 0.47 $\mu$ F, 16 V, X7R, 10%, 0805                                  | Panasonic | ECJ-2YB1H104K   |
| C15                   | 1     | Capacitor, ceramic, 0.027 $\mu$ F, 50 V, X7R, 10%, 0805                                 | std       | std             |
| C16, C27              | 2     | Capacitor, ceramic, 180 pF, 50 V, X7R, 10%, 0805                                        | std       | std             |
| C19, C23,<br>C28, C35 | 4     | Capacitor, ceramic, 1.0 $\mu$ F, 25 V, X7R, 10%, 0805                                   | std       | std             |
| C2                    | 1     | Capacitor, ceramic, 3.9 nF, 50 V, X7R, 10%, 0805                                        | std       | std             |
| C20, C21              | 2     | Capacitor, film, 0.47 $\mu$ F, 275 V <sub>AC</sub> , 0.236 x 0.591                      | Panasonic | ECQ-U2A474MG    |
| C22                   | 1     | Capacitor, film, 0.047 $\mu$ F, 300 V <sub>AC</sub> , 20 $\pm$ %, 0.236 x 0.591         | Panasonic | ECQ-U3A473MG    |
| C24, C26              | 2     | Capacitor, ceramic, 56 pF, 50 V, NPO, 5%, 0603                                          | std       | std             |
| C25                   | 1     | Capacitor, ceramic, 0.47 $\mu$ F, 16 V, X7R, 10%, 0603                                  | std       | std             |
| C29, C30              | 2     | Capacitor, ceramic, 47 pF, 50 V, X7R, 5%, 0603                                          | std       | std             |
| C3                    | 1     | Capacitor, ceramic, 68 pF, 50 V, X7R, 10%, 0805                                         | std       | std             |
| C31, C32              | 2     | CAP, tantalum chip, 47 $\mu$ F, 16 V, 0.281 x 0.126                                     | Vishay    | 595D476X9016C2T |

**Table 2. Parts List (continued)**

| Ref Des                           | Count | Description                                                                                               | MFR                     | Part Number  |
|-----------------------------------|-------|-----------------------------------------------------------------------------------------------------------|-------------------------|--------------|
| C34                               | 1     | Capacitor, 220 $\mu$ F, aluminum electrolytic, 450 V <sub>DC</sub> , -40/+85 °C, $\pm$ 20%, 0.984 In dia. | Panasonic               | ECOS2WP221CX |
| C4                                | 1     | Capacitor, 330 $\mu$ F, aluminum electrolytic, 25 V, Temp -55°C to 105°C°, $\pm$ 20%, 8 x 11.5 mm         | Rubycon                 | UPW1E331MPD6 |
| C5                                | 1     | Capacitor, ceramic, 10 nF, 50 V, X7R, 10%, 0805                                                           | std                     | std          |
| C6, C11                           | 2     | Capacitor, ceramic, 100 pF, 50 V, X7R, 10%, 0805                                                          | std                     | std          |
| C7                                | 1     | Capacitor, ceramic, 2.2 $\mu$ F, 16 V, X7R, 10%, 1206                                                     | std                     | std          |
| C8                                | 1     | Capacitor, ceramic, 1 $\mu$ F, 25 V, X7R, 10%, 1206                                                       | std                     | std          |
| C9                                | 1     | Capacitor, ceramic, 0.22 $\mu$ F, 50 V, X7R, 10%, 0805                                                    | std                     | std          |
| D1                                | 1     | IC, adjustable precision shunt regulator, SOT-89                                                          | Texas Instruments       | TL431CPK     |
| D13, D14                          | 2     | Diode, schottky rectifier, 10 A, 600 V, TO-263-2                                                          | CREE                    | CSD10060G    |
| D15                               | 1     | Diode, zener, 15 V, 350 mW, SOT-23                                                                        | Diodes, Inc.            | BZX84C15     |
| D16                               | 1     | Diode, 600 V, 6 A, 400 A peak surge, P600                                                                 | Diodes, Inc.            | 6A6-T        |
| D2                                | 1     | Diode, rectifier, 1000 mA, 50 V, SMA                                                                      | Diodes, Inc.            | RS1A         |
| D3, D4, D5                        | 3     | Diode, schottky, 500 mA, 25 V, SMA                                                                        | Vishay Telefunken       | BYS10-25     |
| D6, D7                            | 2     | Diode, signal, 600 V, 1 A, DO-41                                                                          | On Semiconductor        | 1N4005RL     |
| D8                                | 1     | 6 A, 600 V bridge rectifier, GBJ series                                                                   | General Semiconductor   | PB66         |
| D9, D10, D11, D12                 | 4     | Diode, schottky, 500 mA, 30 V, SOD123                                                                     | ON Semiconductor        | MBR0530      |
| F1                                | 1     | Fuseholder, 1/4 fuses, 0.42                                                                               | Cooper/Bussman          | BK/1A1907-06 |
| Fuse                              | 1     | 4 A, 250 V, 3AG glass fast acting cartridge type, 1.25 In x .25 In                                        | Littlefuse              | 312 004      |
| HS1, HS2                          | 2     | Heatsink, TO-220, vertical mount, 15°C/W, 0.5 x 0.95                                                      | Aavid                   | 593002B03400 |
| HS3, HS4                          | 2     | Heatsink, TO-220, vertical mount, 5°C/W, 0.5 x 1.38 In                                                    | Aavid                   | 513201       |
| J1                                | 1     | Terminal block, 2 pin, 15 A, 5.1 mm, 0.40 x 0.35                                                          | OST                     | ED1609       |
| **L1, L2                          | 2     | 200 $\mu$ H inductor, toroid vertical THT, 100 kHz @ 2 A, 0.866 x 1.358 In                                | Cooper                  | CTX16-17309  |
| Q1                                | 1     | Transistor, switching power NPN, 1000 V, 5 A, TO-220                                                      | On Semi                 | MJE18004     |
| Q2, Q3, Q4                        | 3     | MOSFET, N-channel, 500 V, 8 A, 750 m $\Omega$ , TO-220                                                    | International Rectifier | IRF840       |
| R1                                | 1     | Resistor, power metal film, 82 k $\Omega$ , 3 W, 5 $\pm$ %, 1,000 X 0.200                                 | Panasonic               | ERG-3SJ823   |
| R12, R17, R21, R22, R39, R56, R57 | 7     | Resistor, chip, 10 k $\Omega$ , 1/10 W, 1%, 0805                                                          | std                     | std          |
| R13                               | 1     | Resistor, chip, 5.11 k $\Omega$ , 1/10 W, 1%, 0805                                                        | std                     | std          |
| R14                               | 1     | Resistor, chip, 30.1 k $\Omega$ , 1/10 W, 1%, 0805                                                        | std                     | std          |
| R15                               | 1     | Resistor, chip, 3.74 k $\Omega$ , 1/10 W, 1%, 0805                                                        | std                     | std          |
| R16                               | 1     | Resistor, chip, 2 k $\Omega$ , 1/10 W, 1%, 0805                                                           | std                     | std          |
| R18                               | 1     | Resistor, chip, 12.1 k $\Omega$ , 1/10 W, 1%, 0805                                                        | std                     | std          |
| R19                               | 1     | Resistor, chip, 20 k $\Omega$ , 1/10 W, 1%, 0805                                                          | std                     | std          |
| R2                                | 1     | Resistor, chip, 110 k $\Omega$ , 1/10 W, 1%, 0805                                                         | std                     | std          |
| R20                               | 1     | Resistor, chip, 316 k $\Omega$ , 1/10 W, 1%, 0805                                                         | std                     | std          |
| R23                               | 1     | Resistor, chip, 34 k $\Omega$ , 1/10 W, 1%, 0805                                                          | std                     | std          |
| R24                               | 1     | Resistor, chip, 22.1 k $\Omega$ , 1/10 W, 1%, 0805                                                        | std                     | std          |
| R25, R28                          | 2     | Resistor, chip, 562 k $\Omega$ , 1/8 W, 1%, 0805                                                          | std                     | std          |
| R26                               | 1     | Resistor, chip, 15 k $\Omega$ , 1/10 W, 01%, 0805                                                         | std                     | std          |

**Table 2. Parts List (continued)**

| Ref Des                 | Count | Description                                                                    | MFR                  | Part Number   |
|-------------------------|-------|--------------------------------------------------------------------------------|----------------------|---------------|
| R27                     | 1     | Resistor, chip, 100 $\Omega$ , 1/8 W, 0.1%, 1206                               | std                  | std           |
| R29, R40, R41           | 3     | Resistor, chip, 1 k $\Omega$ , 1/10 W, 1%, 0805                                | std                  | std           |
| R3                      | 1     | Resistor, chip, 28.0 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R30                     | 1     | Resistor, chip, 9.09 k $\Omega$ , 1/10 W, 1%, 0805                             | Panasonic            | ERJ-6ENF9091V |
| R32, R33                | 2     | Resistor current sense 0.20 $\Omega$ 3 W, 0.600 $\times$ 0.250 In              | Ohmite               | 13FR200       |
| R34                     | 1     | Resistor, chip, 59 k $\Omega$ , 1/10 W, 5%, 0805                               | std                  | std           |
| R35                     | 1     | Resistor, chip, 13.3 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R36                     | 1     | Resistor, chip, 38.3 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R37                     | 1     | Resistor, chip, 20.0 $\Omega$ , 1/4 W, 1%, 1206                                | std                  | std           |
| R38                     | 1     | Resistor, chip, 6.81 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R4                      | 1     | Resistor, power metal film, 500V 10 k $\Omega$ , 3 W, 5 $\pm$ %, 1,000 X 0.200 | Panasonic            | ERG-3SJ103    |
| R42                     | 1     | Resistor, chip, 2.94 k $\Omega$ , 1/8 W, 1%, 805                               | std                  | std           |
| R43, R44                | 2     | Resistor, chip, 6.04 k $\Omega$ , 1/10 W, 1%, 1206                             | std                  | std           |
| R45                     | 1     | Resistor, chip, 20.5 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R46                     | 1     | Resistor, chip, 80.6 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R47, R50, R51           | 3     | Resistor, chip, 324 k $\Omega$ , 1/10 W, 1%, 0805                              | std                  | std           |
| R48, R49                | 2     | Resistor, chip, 100 $\Omega$ , 1/10 W, 1%, 0805                                | std                  | std           |
| R5                      | 1     | Resistor, carbon film, 4.3 $\Omega$ 1/4 W, 5%, Axial, RN55                     | YAGEO                | CFR-25JB-4R3  |
| R52, R54                | 2     | Resistor, chip, 0 $\Omega$ , 1/10 W, 5%, 0805                                  | std                  | std           |
| R53, R55                | 2     | Resistor, chip, 5.23 $\Omega$ , 1/10 W, 1%, 0805                               | std                  | std           |
| R6, R31                 | 2     | Resistor, chip, 47 $\Omega$ , 1/10 W, 1%, 0805                                 | std                  | std           |
| R7, R10                 | 2     | Resistor, chip, 2.32 k $\Omega$ , 1/10 W, 1%, 0805                             | std                  | std           |
| R8, R11                 | 2     | Resistor, chip, 390 k $\Omega$ , 1/8 W, 1%, 1206                               | std                  | std           |
| R9                      | 1     | Resistor, chip, 1.5 k $\Omega$ , 1/10 W, 1%, 0805                              | std                  | std           |
| **T1                    | 1     | Inductor, dual-coupled, 9:1, 0.559 $\times$ 0.508 In                           | Cooper               | CTX16-17169   |
| **T2, T3                | 2     | Transformer, current sense, 10 A, 500 kHz, 1:50, 0.330 $\times$ 0.360          | Pulse                | PA1005.050    |
| TP1, TP2, TP3, TP4      | 4     | Jack, test point, circle                                                       | Farnell              | 240-3xx       |
| **U1                    | 1     | IC, Bi CMOS PFC\PWM Controller, SOP20 (DW)                                     | TI                   | UCC28528DW    |
| **U2                    | 1     | IC, Precision op-amp, SO8                                                      | TI                   | OP07DD        |
| **U3                    | 1     | IC, Dual interleaved PWM controller with programmable max duty cycle, SO16     | TI                   | UCC28220D     |
| **U4                    | 1     | IC, High speed low side power MOSFET driver, SO8                               | TI                   | UCC27324D     |
| X1 @ HS1, HS2, HS3, HS4 | 4     | Thermal pad silicon, TO-220 size                                               | BERQUIST             | 3223-07FR-51  |
| X1 @ HS1, HS2, HS3, HS4 | 4     | Nut #4-40 (steel)                                                              |                      |               |
| X1 @ HS1, HS2, HS3, HS4 | 4     | Split lock washer #4(steel)                                                    |                      |               |
| X1 @ HS1, HS2, HS3, HS4 | 4     | Flat washer #4 (steel)                                                         |                      |               |
| X1 @ HS1, HS2, HS3, HS4 | 4     | Nylon shoulder washer #4                                                       | Keystone Electronics | 3049          |

**Table 2. Parts List (continued)**

| Ref Des                       | Count | Description                                           | MFR                   | Part Number |
|-------------------------------|-------|-------------------------------------------------------|-----------------------|-------------|
| X1 @ HS1,<br>HS2, HS3,<br>HS4 | 4     | Pan head screw #4-40 X 3/8 (steel)                    |                       |             |
| Standoff                      | 4     | Pan head screw #6 X 32 1/4 nylon, used with standoffs |                       |             |
| Standoff                      | 4     | Standoff 6/32 thrd 3/8 x 3/8 In                       | Daburn<br>Electronics | 10-42       |
| --                            | 1     | PCB, 0 In x 0 In x 0 In                               | Any                   | HPA117A     |

## **FCC Warnings**

This equipment is intended for use in a laboratory test environment only. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to subpart J of part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

---

## **EVM WARNINGS AND RESTRICTIONS**

It is important to operate this EVM within the input voltage range of 85 V to 125 V RMS and the output voltage range of 374 V to 425 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 50°C. The EVM is designed to operate properly with certain components above 50°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2005, Texas Instruments Incorporated

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |                                                                    | <b>Applications</b> |                                                                          |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |                                                                    | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated