FO-55111-A

HONEYWELL PART NUMBER
111SM117-H58
PRODUCT CODE TYJ5927

REV	DOCUMENT	CHANGED BY		CHECK
5	0039671	KVB	08MAY08	BLR

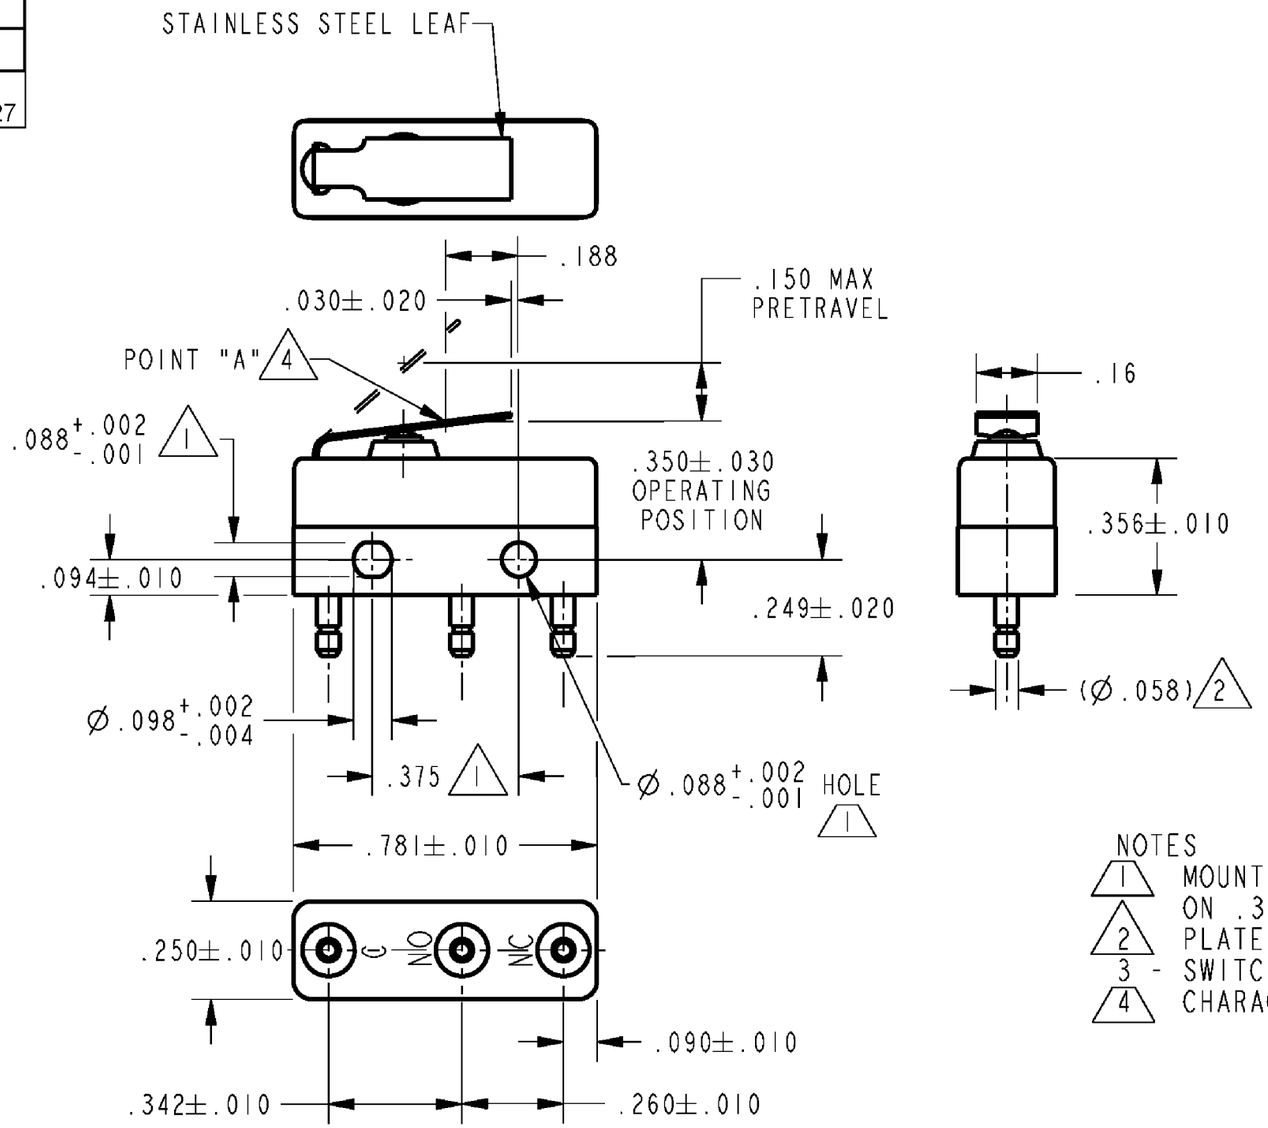

NOTES

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 DIA ON .375±.002 CENTERS
2. PLATED TERMINALS WILL ACCEPT "AMP INC" Ø.058 PIN RECEPTACLES
3. SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
4. CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.	PR - 20469
REPLACES	X96071 - SM

CHARACTERISTICS 4

- OPERATING FORCE – – – – 8 OZ MAX
- RELEASE FORCE – – – – – 2 OZ MIN
- DIFFERENTIAL TRAVEL – – .0045 MAX
- OVERTRAVEL – – – – – – .013 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS			
	KEMA, CE	5A, 250V ~ T85 1E4	
	UL, CSA	5A, 250 VAC	BRAND L4

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION

DRAWN	VK	26 OCT 07
CHECK	RJ	26 OCT 07

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

RASTER

Honeywell

TITLE SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	111SM117-H58	5
SCALE -		WEIGHT .006 LB MAX	SHEET 1 OF 1